
## PLANTING DETAILS


## SEEDLING / LINER BAREROOT PLANTING DETAIL

## HEALING IN

- 1. Locate a healing-in site in a shady, well protected area.
- 2. Excavate a flat bottom trench 12 inches deep and provide drainage.

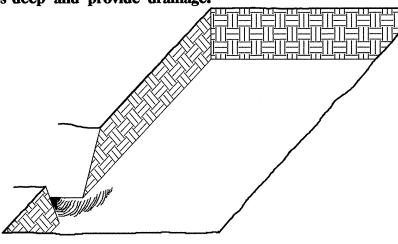


3. Backfill the trench with 2 inches well rotted sawdust. Place a 2 inch layer of well rotted sawdust at a sloping angle at one end of the trench.

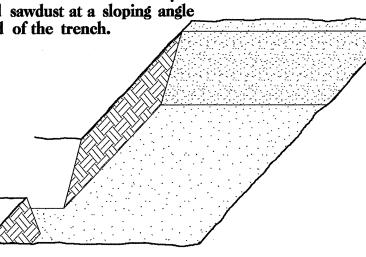


4. Place a single layer of plants against the sloping end so that the root collar is at ground level.

5. Place a 2 inch layer of well rotted with sawdust over the roots maintaining a sloping angle.

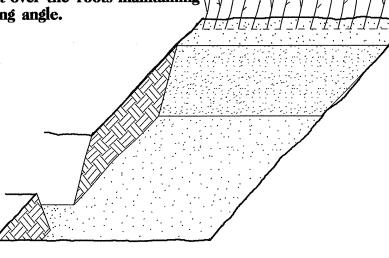


6. Repeat layers of plants and sawdust as necessary and water thoroughly.


#### DIBBLE PLANTING METHOD USING THE KBC PLANTING BAR

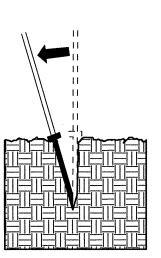


1. Insert planting bar as shown and pull handle

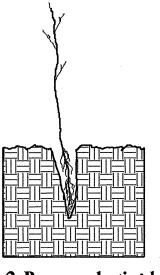


2. Remove planting bar and place seedling at correct depth.

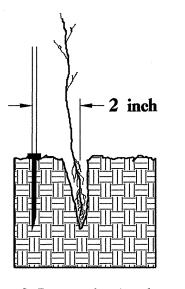


3. Insert planting bar 2 inches toward planter

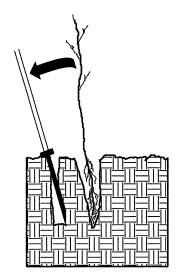

4. Pull handle of bar toward planter, firming soil at bottom.

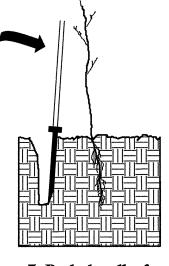


5. Push handle forward firming soil at top.

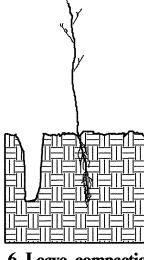

6. Leave compaction hole open. Water

## PLANTING NOTES:

PLANTING BAG
During planting, seedlings
shall be kept in a moist
canvas bag or similar
container to prevent the
root systems from drying.



KBC PLANTING BAR
Planting bar shall have a
blade with a triangular
cross section, and shall
be 12 inches long,
4 inches wide and 1 inch thick at center.

ROOT PRUNING
All seedlings shall be root pruned, if necessary, so that no roots extend more than 10 inches below the root collar.



PROJECT REFERENCE NO. SHEET NO. R-3324 RF-I R/W SHEET NO. HYDRAULICS ENGINEER ROADWAY DESIGN

## REFORESTATION

☐ TREE REFORESTATION SHALL BE PLANTED 6 FT. TO 10 FT. ON CENTER, RANDOM SPACING, AVERAGING 8 FT. ON CENTER, APPROXIMATELY 680 PLANTS PER ACRE.

#### REFORESTATION

25% QUERCUS NIGRA

MIXTURE, TYPE, SIZE, AND FURNISH SHALL CONFORM TO THE FOLLOWING:

25% PLATANUS OCCIDENTALIS AMERICAN SYCAMORE 12 in - 18 in BR

**GREEN ASH** 12 in - 18 in BR 25% FRAXINUS PENNSYLVANICA 12 in - 18 in BR WILLOW OAK 25% QUERCUS PHELLOS

WATER OAK


REFORESTATION DETAIL SHEET


N.C.D.O.T. - ROADSIDE ENVIRONMENTAL UNIT

12 in - 18 in BR


## PLANTING DETAILS

## LIVE STAKES PLANTING DETAIL

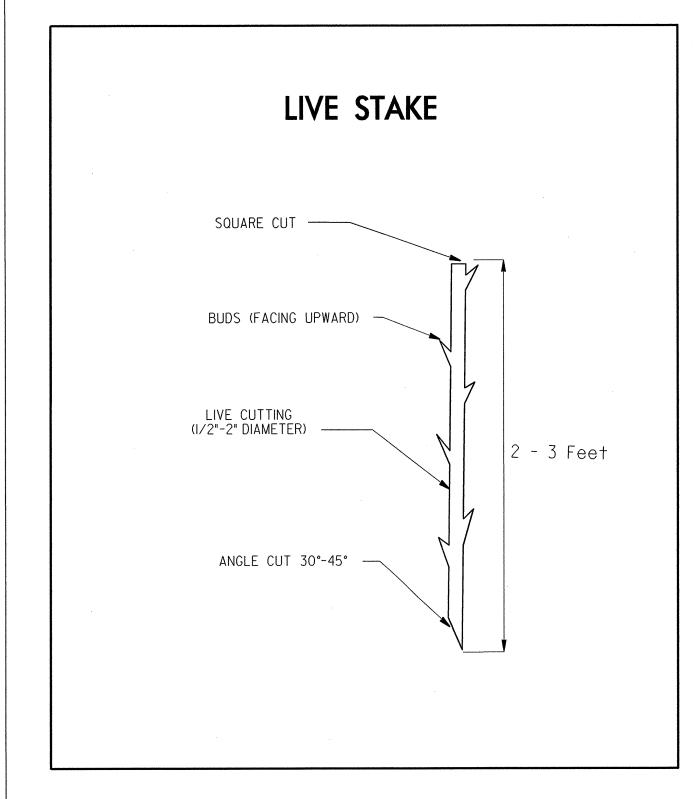


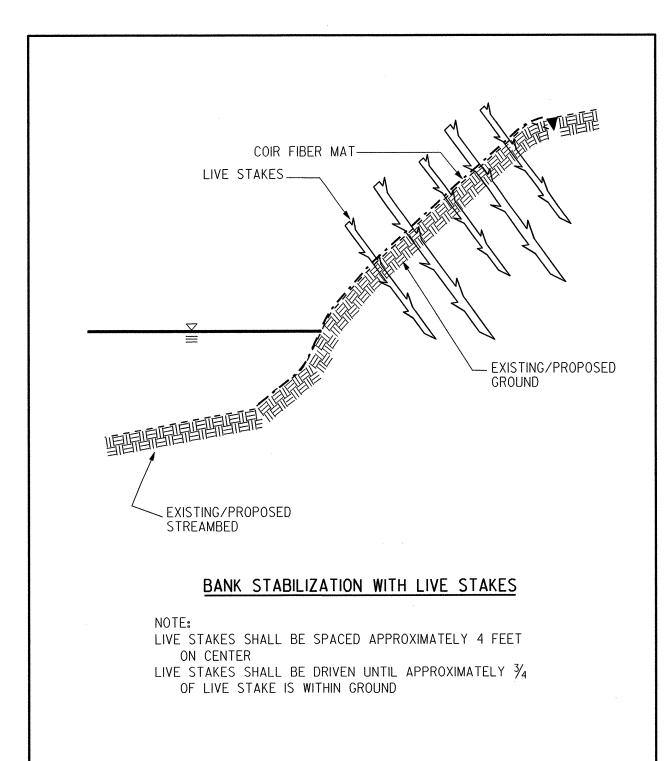


### BAREROOT PLANTING DETAIL DIBBLE PLANTING METHOD USING THE KBC PLANTING BAR

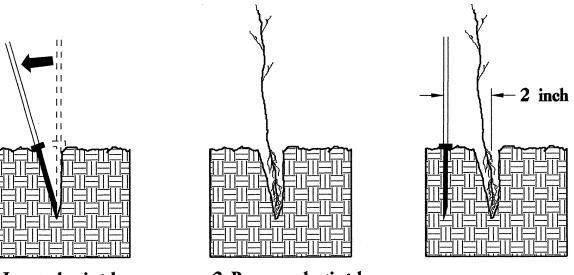



3. Insert planting bar 2 inches toward planter

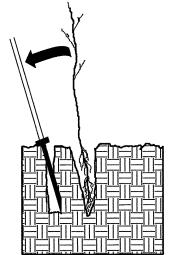



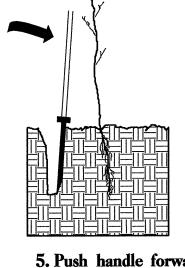





6. Leave compaction hole open. Water


#### **PLANTING NOTES:**

PLANTING BAG During planting, seedlings shall be kept in a moist canvas bag or similar container to prevent the root systems from drying.



KBC PLANTING BAR
Planting bar shall have a blade with a triangular cross section, and shall be 12 inches long, 4 inches wide and 1 inch thick at center.


**ROOT PRUNING** All seedlings shall be root pruned, if necessary, so that no roots extend more than 10 inches below the

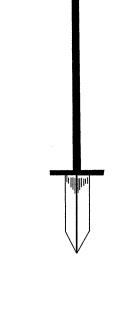

TYPE 1 STREAMBANK REFORESTATION SHALL BE PLANTED 3 FT. TO 5 FT. ON CENTER, RANDOM SPACING, AVERAGING 4 FT. ON CENTER, APPROXIMATELY 2724 PLANTS PER ACRE.

TYPE 2 STREAMBANK REFORESTATION SHALL BE PLANTED 6 FT. TO 10 FT. ON CENTER, RANDOM SPACING, AVERAGING 8 FT. ON CENTER, APPROXIMATELY 680 PLANTS PER ACRE.

NOTE: TYPE 1 AND TYPE 2 STREAMBANK REFORESTATION SHALL BE PAID FOR AS "STREAMBANK REFORESTATION"

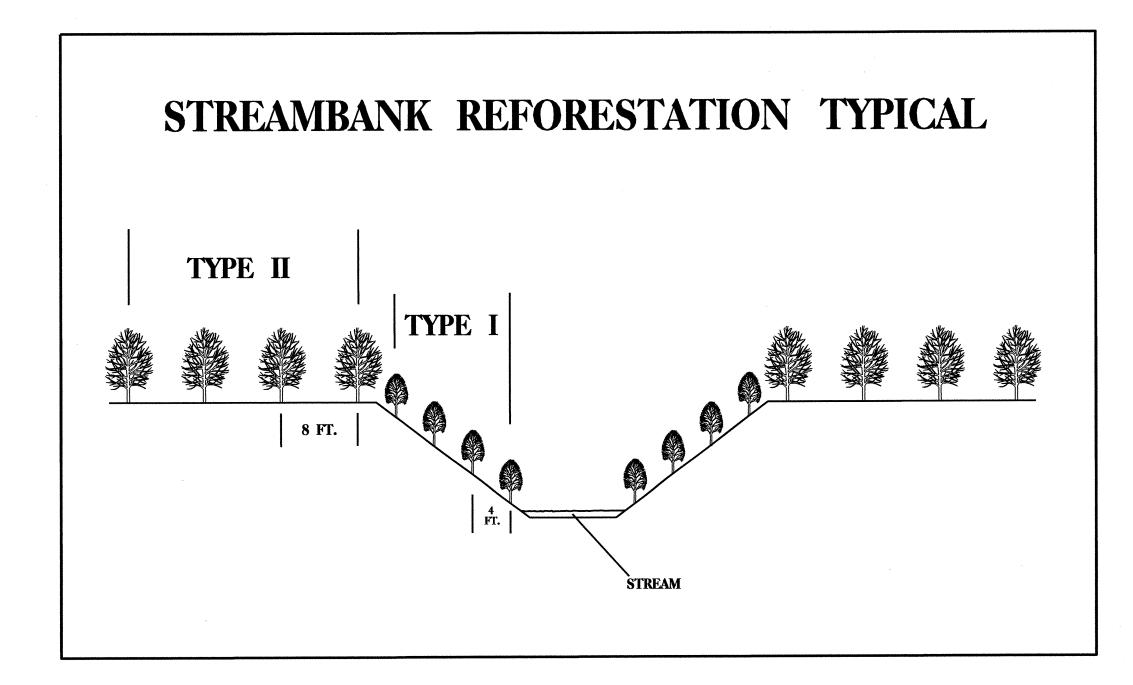

STREAMBANK REFORESTATION MIXTURE, TYPE, SIZE, AND FURNISH SHALL CONFORM TO THE FOLLOWING: TYPE 1 2 ft - 3 ft LIVE STAKES **BUTTONBUSH** 50% CEPHALANTHUS OCCIDENTALIS SILKY DOGWOOD 2 ft - 3 ft LIVE STAKES 50% CORNUS AMOMUM TYPE 2 12 in - 18 in BR 25% TAXODIUM DISTICHUM BALD CYPRESS 12 in - 18 in BR **GREEN ASH** 25% FRAXINUS PENNSYLVANICA 12 in - 18 in BR WATER TUPELO 25% NYSSA AQUATICA SWAMP CHESTNUT OAK 12 in - 18 in BR 25% QUERCUS MICHAUXII

SEE PLAN SHEETS FOR AREAS TO BE PLANTED

## STREAMBANK REFORESTATION DETAIL SHEET 1 OF 2

PROJECT REFERENCE NO.

R-3324

ROADWAY DESIGN ENGINEER


RW SHEET NO.

SHEET NO.

RF -2

HYDRAULICS ENGINEER

N.C.D.O.T. - ROADSIDE ENVIRONMENTAL UNIT

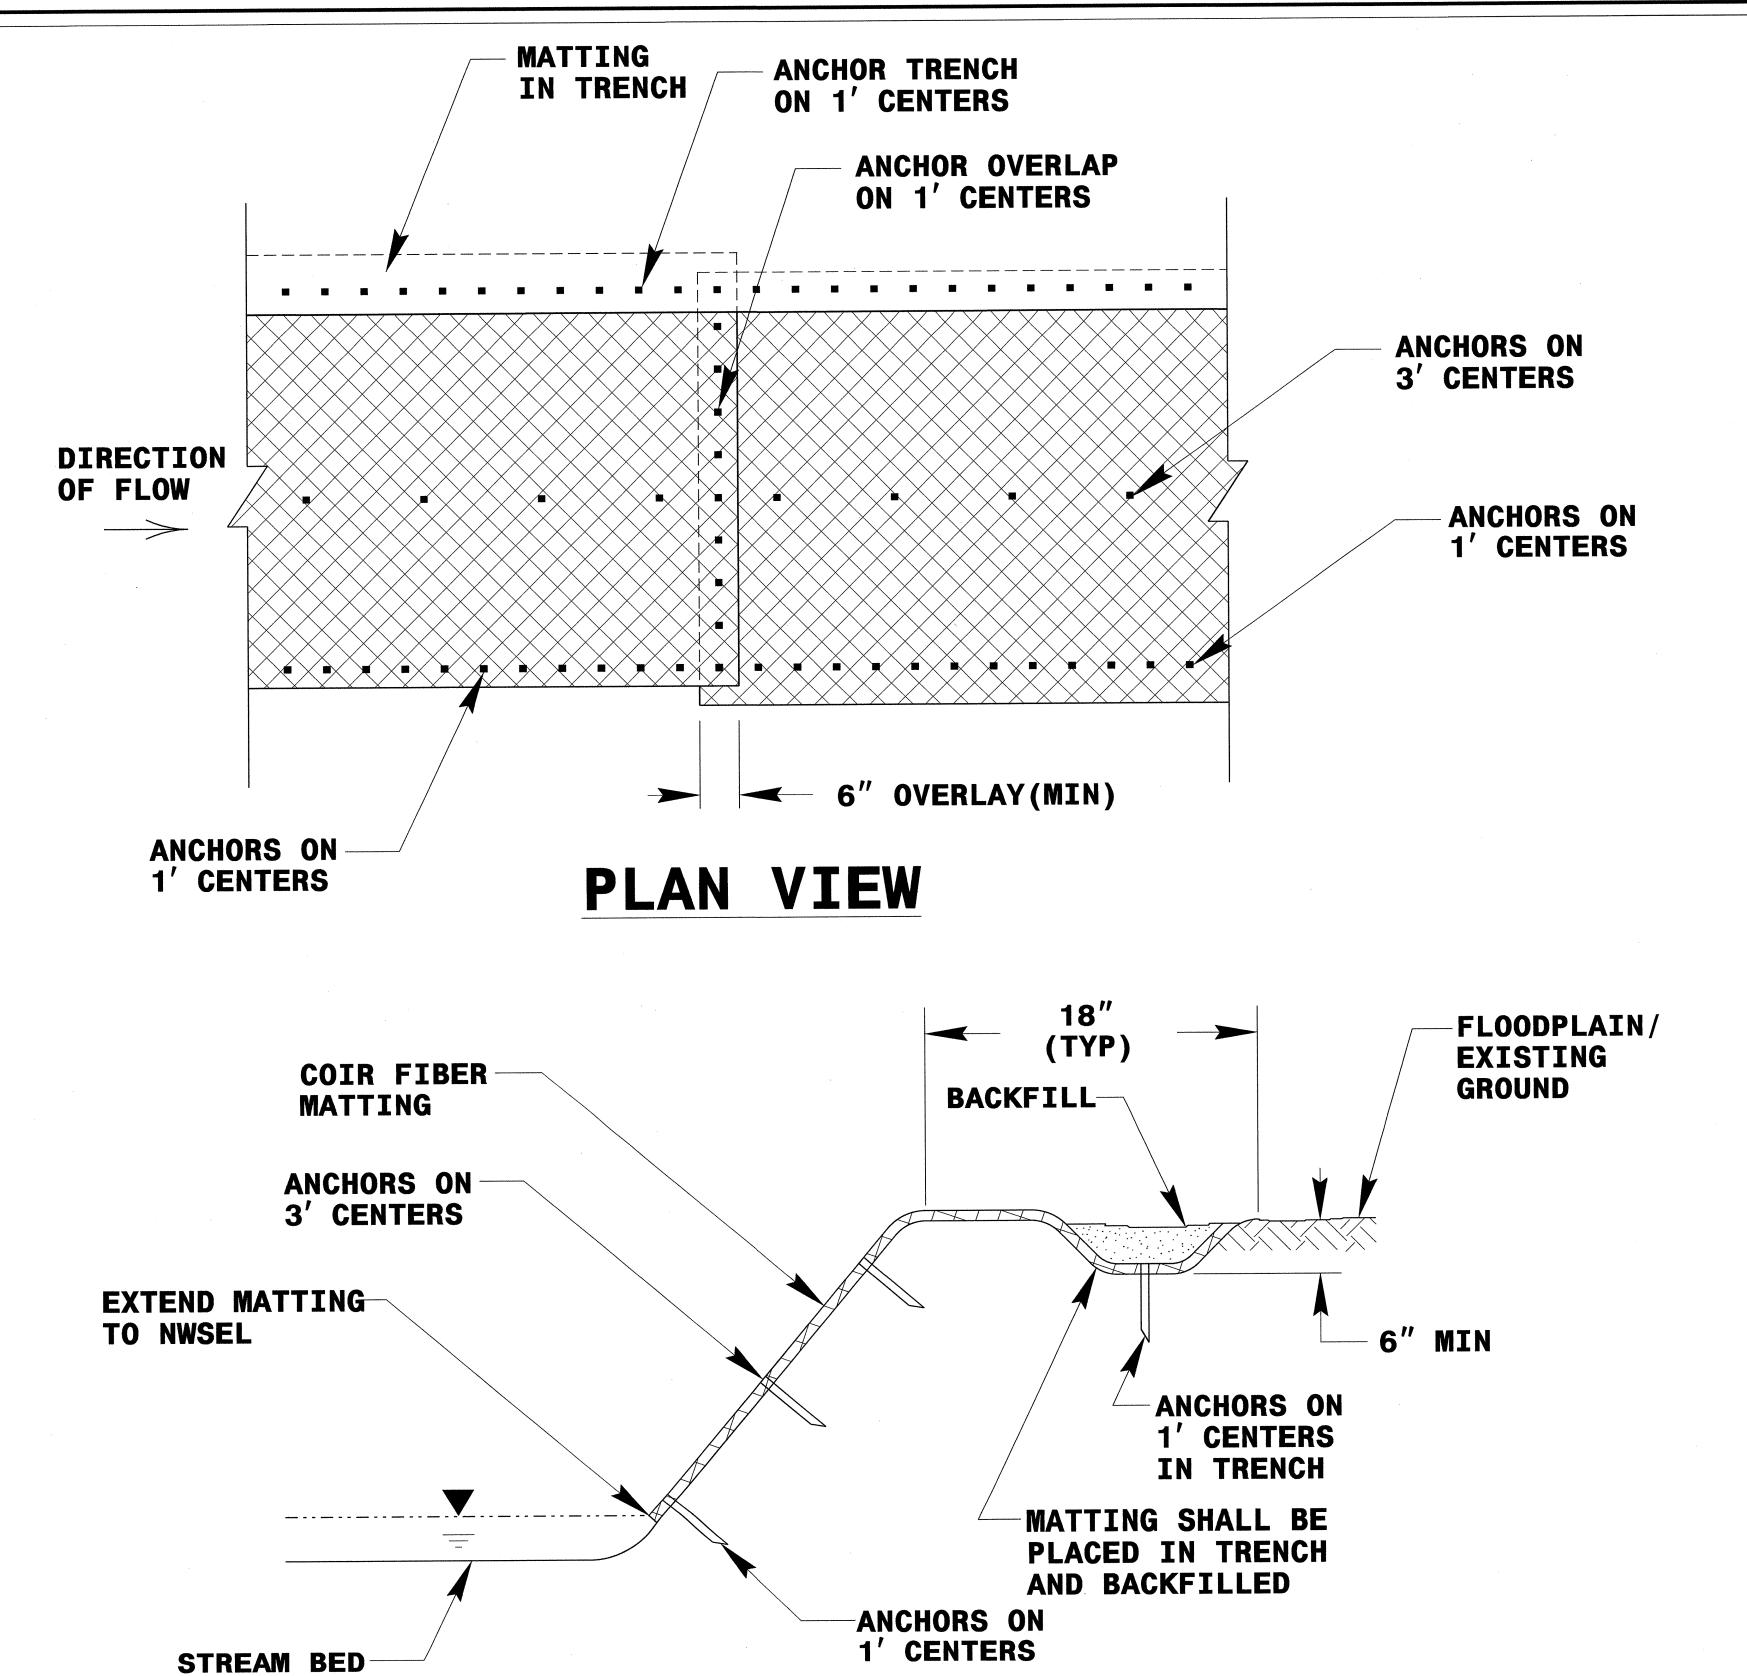

TYPICAL CROSS SECTION

NOT TO SCALE

COIR FIBER MATTING DETAIL

AN

PROJECT REFERENCE NO.

R-3324

RW SHEET NO.

ROADWAY DESIGN
ENGINEER

HYDRAULICS
ENGINEER

ENGINEER

ANCHOR OPTIONS

1" (nominal) STAPLE

2" x 2" (nominal) WOODEN STAKE

12-24"

#10 STEEL

REINFORCEMENT BAR

24"

DIAMETER BEND

1-2"

# STREAMBANK REFORESTATION DETAIL SHEET 2 OF 2

N.C.D.O.T. - ROADSIDE ENVIRONMENTAL UNIT