

### PAVEMENT MARKING GENERAL NOTES

THE FOLLOWING GENERAL NOTES APPLY AT ALL TIMES FOR THE DURATION OF THE CONSTRUCTION PROJECT, EXCEPT WHEN OTHERWISE NOTED IN THE PLAN, OR DIRECTED BY THE ENGINEER.

- A) INSTALL PAVEMENT MARKINGS AND PAVEMENT MARKERS ON THE FINAL SURFACE AS FOLLOWS:
 

ROAD NAME	MARKING	MARKER
BRIDGE DECK	COLD APPLIED PLASTIC	NONE
SR 2020 (NEW ALIGNMENT)	THERMOPLASTIC	NONE
SR 2020 (EX. ALIGNMENT)	THERMOPLASTIC	NONE
- B) TIE PROPOSED PAVEMENT MARKING LINES TO EXISTING PAVEMENT MARKING LINES.
- C) REMOVE/REPLACE ANY CONFLICTING/DAMAGED PAVEMENT MARKINGS AND MARKERS.

### ROADWAY STANDARD DRAWINGS

THE FOLLOWING ROADWAY STANDARDS AS APPEAR IN "ROADWAY STANDARD DRAWINGS" - PROJECT SERVICES UNIT - N.C. DEPARTMENT OF TRANSPORTATION - RALEIGH, N.C., DATED JANUARY 2012 ARE APPLICABLE TO THIS PROJECT AND BY REFERENCE HEREBY ARE CONSIDERED A PART OF THESE PLANS:

STD. NO.	TITLE
904.10	ORIENTATION OF GROUND MOUNTED SIGNS
904.50	MOUNTING OF TYPE 'D', 'E' AND 'F' SIGNS ON 'U' CHANNEL POSTS
1205.01	PAVEMENT MARKINGS - LINE TYPES AND OFFSETS
1205.02	PAVEMENT MARKINGS - TWO-LANE AND MULTILANE ROADWAYS
1205.12	PAVEMENT MARKINGS - BRIDGES
1261.01	GUARDRAIL AND BARRIER DELINEATORS - INSTALLATION SPACING
1261.02	GUARDRAIL AND BARRIER DELINEATORS - TYPES AND MOUNTING
1262.01	GUARDRAIL END DELINEATION
1264.01	OBJECT MARKERS - TYPES

### TYPE "E" SIGNS

<b>401</b> QUANTITY REQUIRED <u>1</u>  ONE 'U' POST PER SIGN	<b>402</b> QUANTITY REQUIRED <u>1</u>  ONE 'U' POST PER SIGN	<b>403</b> QUANTITY REQUIRED <u>3</u>  ONE 'U' POST PER SIGN (4' MINIMUM INSTALLATION HEIGHT)
--	--	--

### SIGNING GENERAL NOTES

- . SIGNS FURNISHED BY CONTRACTOR
- . ALL EXISTING SIGNS AND SIGN SYSTEMS WITHIN THE PROJECT LIMITS SHALL BE REMOVED AND DISPOSED OF UNLESS OTHERWISE NOTED IN THE PLANS.
- . IF REMOVAL OR RELOCATION OF SIGNS ON PRIVATE STREET (NON-STATE MAINTAINED) IS REQUIRED DUE TO CONSTRUCTION, THE CONTRACTOR SHALL INFORM THE ENGINEER. THE WORK WILL BE COMPLETED BY OTHERS.
- . SIGNING PLANS DO NOT INCLUDE TEMPORARY CONSTRUCTION SIGNING. SEE TRAFFIC CONTROL PLANS
- . WHEN NOT STATIONED OR DIMENSIONED ON PLANS, ALL 'E' AND 'F' SIGNS SHALL BE FIELD LOCATED BY THE ENGINEER
- . THE BACKGROUND FOR TYPE E & F SIGNS SHALL BE TYPE C REFLECTIVE SHEETING.

### SUMMARY OF SIGNING QUANTITIES

ITEM NO.	ITEM DESCRIPTION	QUANTITY	UNIT
4025000000	CONTRACTOR FURNISHED, TYPE E SIGN	19.25	SF
4072000000	SUPPORTS, 3 LB STEEL U-CHANNEL	25	LF
4078000000	SUPPORTS, 2 LB STEEL U-CHANNEL	3	EA
4102000000	SIGN ERECTION, TYPE E	5	EA


### PAVEMENT MARKING SCHEDULE

SYMBOL	DESCRIPTION
	COLD APPLIED PLASTIC (4") Type 2 - Permanent high Performance
CA	WHITE EDGELINE
CI	DOUBLE YELLOW CENTERLINE
	THERMOPLASTIC (4", 90 MILS)
TA	WHITE EDGELINE
TI	DOUBLE YELLOW CENTERLINE
T8	2' / 6" WHITE MINI-SKIP (4")

APPROVED: *[Signature]* DATE: 2/5/13

#### SIGNING AND PAVEMENT MARKING PLAN

SCALE: 1' = 50'		REVISIONS
DATE: 09/12		
DWG. BY: NJD		
DESIGN BY: NJD		
REVIEWED BY: KJV		CADD FILE

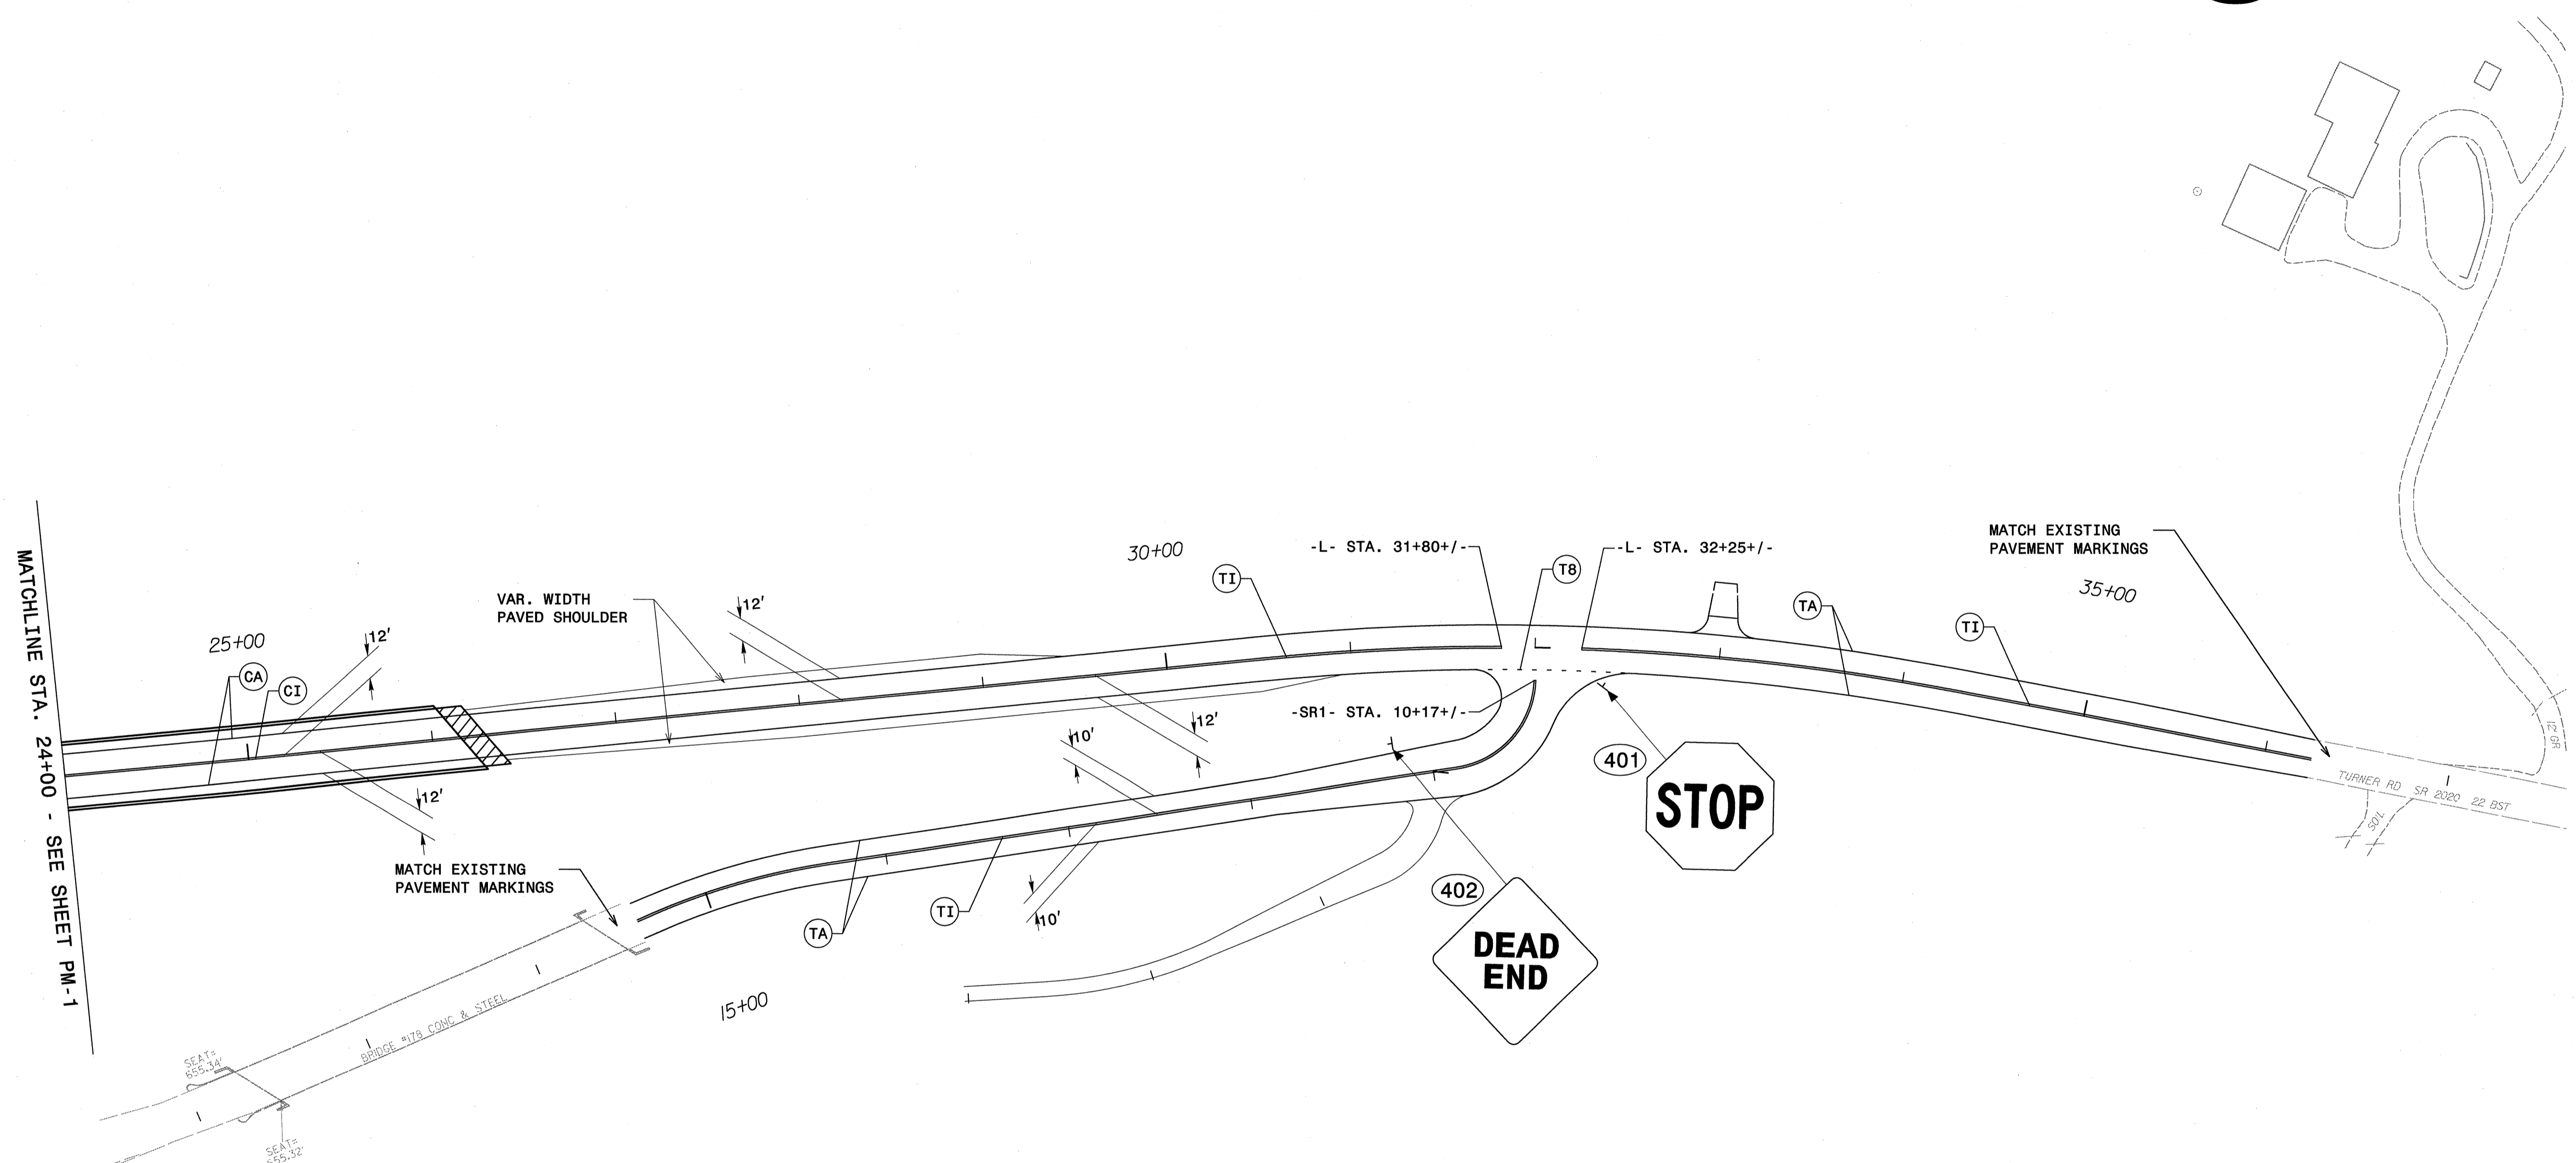

**PAVEMENT MARKING SCHEDULE**

SYMBOL	DESCRIPTION
COLD APPLIED PLASTIC (4")	
Type 2 - Permanent high Performance	
CA	WHITE EDGELINE
CI	DOUBLE YELLOW CENTERLINE
THERMOPLASTIC (4", 90 MILS)	
TA	WHITE EDGELINE
TI	DOUBLE YELLOW CENTERLINE
T8	2' / 6" WHITE MINI-SKIP (4")

APPROVED: <i>[Signature]</i> DATE: 2/5/13	<b>SIGNING AND PAVEMENT MARKING PLAN</b>		
	SCALE: 1' = 50'		
	DATE: 09/12		REVISIONS
	DWG. BY: NJD		
	DESIGN BY: NJD		
REVIEWED BY: KJV			