

# STATE OF NORTH CAROLINA DIVISION OF HIGHWAYS

### TRANSPORTATION MANAGEMENT PLAN

## UNION COUNTY

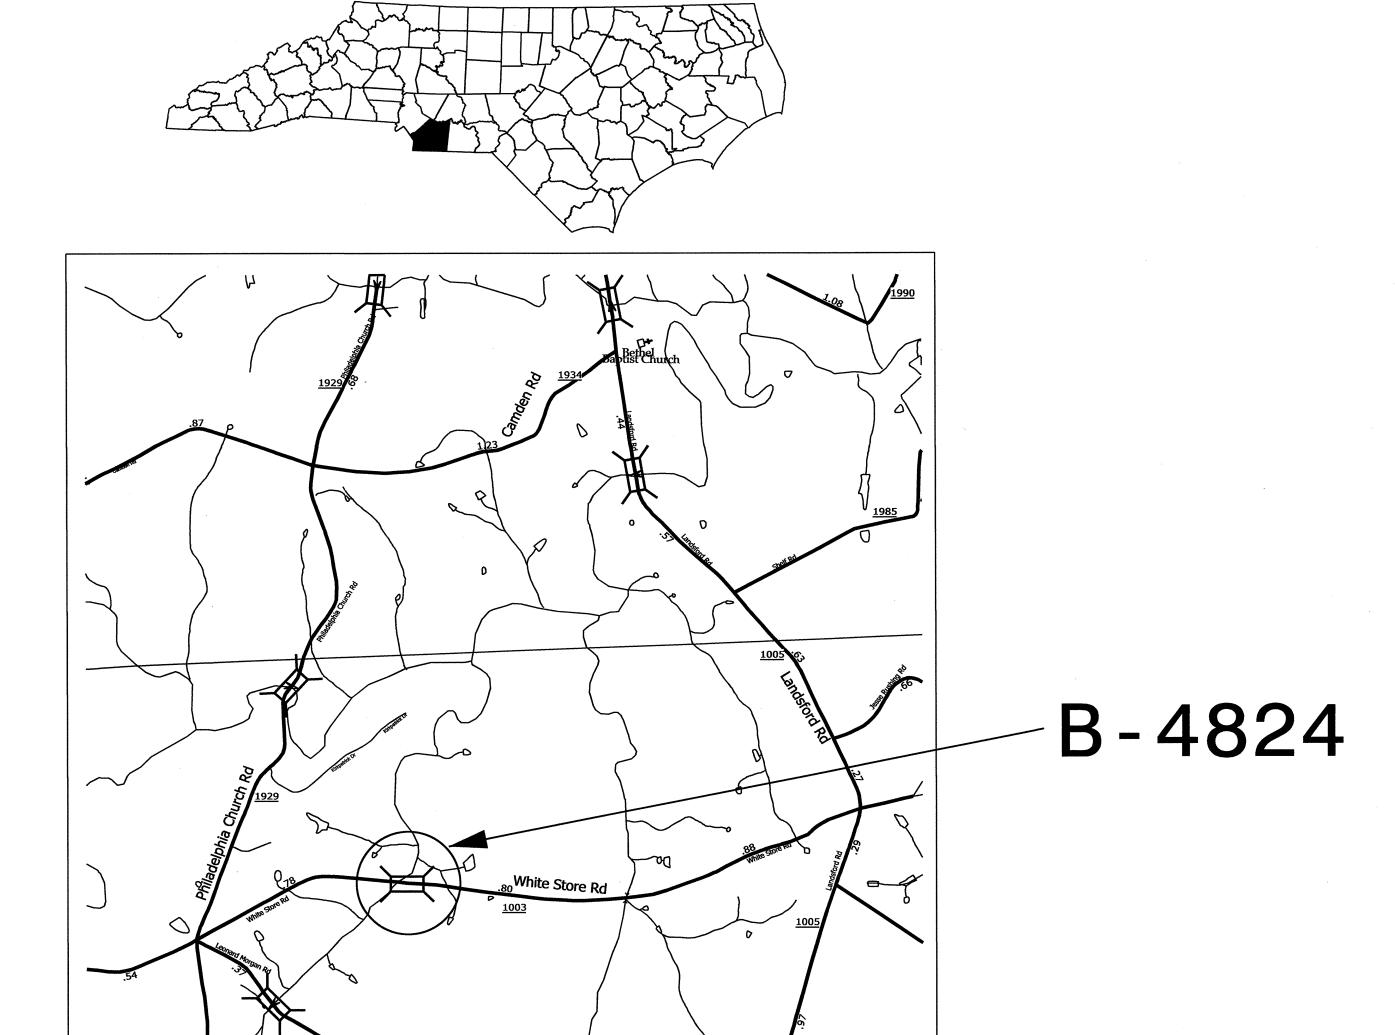

BRIDGE NO. 453 ON SR 1003 (WHITE STORE ROAD) OVER NORKETT CREEK

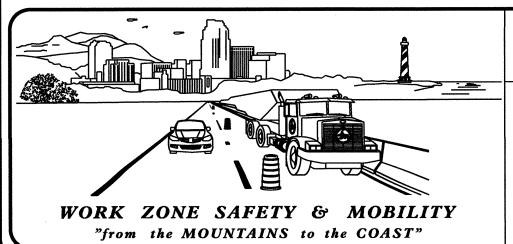


N.C.D.O.T. WORK ZONE TRAFFIC CONTROL
1561 MAIL SERVICE CENTER (MSC) RALEIGH, NC 27699-1561
750 N. GREENFIELD PARKWAY, GARNER, NC 27529 (DELIVERY)
PHONE: (919) 773-2800 FAX: (919) 771-2745

J. S. BOURNE, P.E. STATE TRAFFIC MANAGEMENT ENGINEER

G. L. GETTIER, P.E. TRAFFIC CONTROL PROJECT ENGINEER

J. W. WOOLARD, P.E. TRAFFIC CONTROL PROJECT DESIGN ENGINEER

TRAFFIC CONTROL DESIGN ENGINEER

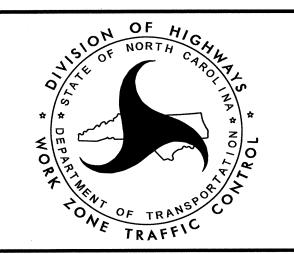

#### INDEX OF SHEETS

SHEET NO.

TMP-1

TMP-1A

TMP-1B

**TITLE** 

TITLE SHEET, VICINITY MAP AND INDEX OF SHEETS

LIST OF APPLICABLE ROADWAY STANDARD DRAWINGS, AND LEGEND

TRANSPORTATION OPERATIONS PLAN: (MANAGEMENT STRATEGIES, GENERAL NOTES AND LOCAL NOTES), AND PROJECT PHASING

APPROVED:\_ DATE: SEAL

PROJ. REFERENCE NO. SHEET NO. TMP-1A

#### ROADWAY STANDARD DRAWINGS

THE FOLLOWING ROADWAY STANDARDS AS SHOWN IN "ROADWAY STANDARD DRAWINGS" -PROJECT SERVICES UNIT - N.C. DEPARTMENT OF TRANSPORTATION - RALEIGH, N.C., DATED JANAUARY 2012 ARE APPLICABLE TO THIS PROJECT AND BY REFERENCE HEREBY ARE CONSIDERED A PART OF THESE PLANS:

#### STD. NO.

#### TITLE

1101.01	WORK ZONE WARNING SIGNS
1101.03	TEMPORARY ROAD CLOSURES
1101.05	WORK ZONE VEHICLE ACCESSES
1101.11	TRAFFIC CONTROL DESIGN TABLES
1110.01	STATIONARY WORK ZONE SIGNS
1130.01	DRUMS
1135.01	CONES
1145.01	BARRICADES
1180.01	SKINNY - DRUM
1261.01	GUARDRAIL AND BARRIER DELINEATORS - INSTALLATION SPACING
1261.02	GUARDRAIL AND BARRIER DELINEATORS - TYPES AND MOUNTING
1262.01	GUARDRAIL END DELINEATION
1264.01	OBJECT MARKERS - TYPES
1264.02	OBJECT MARKERS - INSTALLATION

#### **LEGEND**

#### **GENERAL**

DIRECTION OF TRAFFIC FLOW

DIRECTION OF PEDESTRIAN TRAFFIC FLOW

----- EXIST. PVMT.

NORTH ARROW

— PROPOSED PVMT.

TEMP. SHORING (LOCATION PURPOSES ONLY)

WORK AREA

REMOVAL

USER DEFINED (IF NEEDED)

USER DEFINED (IF NEEDED)

#### SIGNALS







#### PAVEMENT MARKINGS

----EXISTING LINES ----TEMPORARY LINES

#### TRAFFIC CONTROL DEVICES

BARRICADE (TYPE III) 

DRUM SKINNY DRUM S TUBULAR MARKER

TEMPORARY CRASH CUSHION FLASHING ARROW BOARD

**FLAGGER** 

TRUCK MOUNTED ATTENUATOR (TMA)

CHANGEABLE MESSAGE SIGN

LAW ENFORCEMENT

#### TEMPORARY SIGNING

O PORTABLE SIGN

→ STATIONARY SIGN

STATIONARY OR PORTABLE SIGN

#### PAVEMENT MARKERS


CRYSTAL/CRYSTAL

CRYSTAL/RED

● YELLOW/YELLOW

#### PAVEMENT MARKING SYMBOLS

PAVEMENT MARKING SYMBOLS



ROADWAY STANDARD DRAWINGS & LEGEND

PROJ.	REFERENCE	NO.	SHEET	NO.
	B-4824		TMP-	1B

#### GENERAL NOTES

CHANGES MAY BE REQUIRED WHEN PHYSICAL DIMENSIONS IN THE DETAIL DRAWINGS, STANDARD DETAILS, AND ROADWAY DETAILS ARE NOT ATTAINABLE TO MEET FIELD CONDITIONS OR RESULT IN DUPLICATE OR UNDESIRED OVERLAPPING OF DEVICES. MODIFICATION MAY INCLUDE: MOVING, SUPPLEMENTING, COVERING, OR REMOVAL OF DEVICES AS DIRECTED BY THE ENGINEER.

THE FOLLOWING GENERAL NOTES APPLY AT ALL TIMES FOR THE DURATION OF THE CONSTRUCTION PROJECT EXCEPT WHEN OTHERWISE NOTED IN THE PLAN OR DIRECTED BY THE ENGINEER.

#### TRAFFIC PATTERN ALTERATIONS

A) NOTIFY THE ENGINEER TWENTY ONE (21) CALENDAR DAYS PRIOR TO ANY TRAFFIC PATTERN ALTERATION.

#### SIGNING

- B) PROVIDE SIGNING AND DEVICES REQUIRED TO CLOSE THE ROAD ACCORDING TO THE ROADWAY STANDARD DRAWINGS AND TRAFFIC CONTROL PLANS.
  - STATE FORCES WILL PROVIDE SIGNING REQUIRED FOR THE OFF-SITE DETOUR ROUTE.
- C) COVER OR REMOVE ALL SIGNS AND DEVICES REQUIRED TO CLOSE THE ROAD WHEN ROAD CLOSURE IS NOT IN OPERATION.
  - COVER OR REMOVE ALL SIGNS REQUIRED FOR THE OFF-SITE DETOUR WHEN THE DETOUR IS NOT IN OPERATION.
- D) ENSURE ALL NECESSARY SIGNING IS IN PLACE PRIOR TO ALTERING ANY TRAFFIC PATTERN.

#### TRAFFIC CONTROL DEVICES

E) PLACE TYPE III BARRICADES, WITH "ROAD CLOSED" SIGN R11-2 ATTACHED, OF SUFFICIENT LENGTH TO CLOSE ENTIRE ROADWAY.

#### MANAGEMENT STRATEGIES

TRAFFIC WILL BE MAINTAINED USING AN OFFSITE DETOUR WHILE THE NEW BRIDGE IS CONSTRUCTED.

### PROJECT PHASING

- STEP 1: AFTER STATE FORCES INSTALL OFF-SITE DETOUR SIGNING, CLOSE SR 1003 (WHITE STORE ROAD, USING RSD 1101.03 (SHEET 1 OF 9) AND PLACE TRAFFIC ON THE OFFSITE DETOUR.
- STEP 2: REMOVE THE EXISTING STRUCTURE. CONSTRUCT THE NEW STRUCTURE AND CONSTRUCT -L- FROM STA. 13+00+/- TO STA. 17+50+/- UP TO BUT NOT INCLUDING THE FINAL LAYER OF SURFACE COURSE.
- STEP 3: PLACE THE FINAL LAYER OF SURFACE COURSE.
- STEP 4: AFTER STATE FORCES PLACE THE FINAL PAVEMENT MARKINGS, REMOVE ALL TRAFFIC CONTROL DEVICES AND OPEN -L- (WHITE STORE ROAD) TO THE FINAL TRAFFIC PATTERN.



GENERAL NOTES, MANAGEMENT STRATEGIES, AND PROJECT PHASING