TIP NO.	SHEET NO.
R-4463AA	SIGN-3

APPROVED: DocuSigned by: Ayman Aloudwah F32AC5CAF965472... 9/23/2014

DATE:

SEAL

NORTH CAROLINA PROFESSIONAL SEAL 028387 ENGINEER AYMAN I. ALOUDWAH

SIGN NUMR: 101
TYPE: B Ground
QUANTITY: 1

BACKG. COLOR: Green
COPY COLOR: White

DESIGN BY: DME
PROJECT ID: R-4463AA

CHK BY: AIA
DIV: 2

STD #: $STN
DATE: May 15, 2014

N. C. DEPARTMENT OF TRANSPORTATION
DIVISION OF HIGHWAYS
TRANSPORTATION MOBILITY AND SAFETY
SIGNING AND DELINEATION

SIGN WIDTH: 9'-0"
HEIGHT: 3'-6"
TOTAL AREA: 31.5 Sq.Ft.

MAT'L: 0.125" ALUMINUM

BORDER TYPE: FLUSH
RECESS: 0"
WIDTH: 1"
RADII: 3"

NO. Z BARS: 2
LENGTH: 100.0"

SYMBOL	X	Y	WID	HT
AR_Type D	28.9	24.6	8	12
AR_Type D	7.7	6	8	12

USE NOTES: 2,5,6
1. Legend and border shall be direct applied Grade A reflective sheeting.
2. Legend and border shall be direct applied Grade C reflective sheeting.
3. Shields shall be Grade A reflective sheeting on 0.032" aluminum and demountable.
4. Background shall be Grade B reflective sheeting.
5. Background shall be Grade C reflective sheeting.
6. Center arrow(s) vertically on sign.

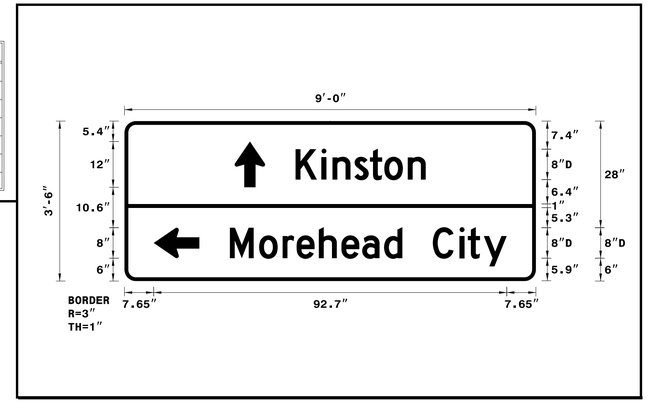

Letter spacings are to start of next letter

																											Series/Size Text Length
	K	i	n	s	t	o	n																				D 2000
44.9	6.8	2.9	5.8	4.1	3.8	6.2	4.7	28.9																			34.2
	M	o	r	e	h	e	a	d		C	i	t		y													D 2000
27.7	7.7	6.2	3.7	5.8	5.9	5.4	5.8	4.8	8	7	2.2	3.2	1	6	7.7												72.7

Spacing Factor is 1 unless specified otherwise

FILENAME: GSENG

SIGN NUMR: 102
TYPE: A Ground
QUANTITY: 1

BACKG. COLOR: Green
COPY COLOR: White

DESIGN BY: DME
PROJECT ID: R-4463AA

CHK BY: AIA
DIV: 2

STD #: $STN
DATE: May 15, 2014

N. C. DEPARTMENT OF TRANSPORTATION
DIVISION OF HIGHWAYS
TRANSPORTATION MOBILITY AND SAFETY
SIGNING AND DELINEATION

SIGN WIDTH: 9'-0"
HEIGHT: 4'-6"
TOTAL AREA: 40.5 Sq.Ft.

MAT'L: 0.125" ALUMINUM

BORDER TYPE: FLUSH
RECESS: 0"
WIDTH: 1.5"
RADII: 6"

NO. Z BARS: 2
LENGTH: 100.0"

SYMBOL	X	Y	WID	HT
M1_4	22	23	24	24
M1_4	62	23	24	24

USE NOTES: 2,3,5
1. Legend and border shall be direct applied Grade A reflective sheeting.
2. Legend and border shall be direct applied Grade C reflective sheeting.
3. Shields shall be Grade A reflective sheeting on 0.032" aluminum and demountable.
4. Background shall be Grade B reflective sheeting.
5. Background shall be Grade C reflective sheeting.
6. Center arrow(s) vertically on sign.

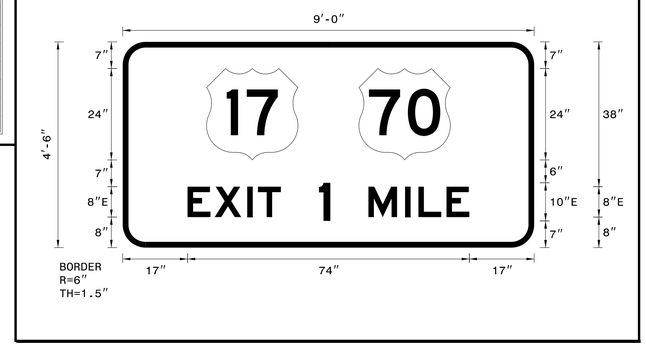

Letter spacings are to start of next letter

																											Series/Size Text Length
	E	X	I	T		1		M	I	L	E																E 2000
17	7.1	8.6	2.8	6	10	3	10	9.6	3.5	7.4	6	17															74

Spacing Factor is 1 unless specified otherwise

FILENAME: GSENG

SIGN DESIGNS

9/9/2014
R:\Projects\R\R4463AA\Traffic\Signing\CADD\Sign Designs\r4463aa_sign designs.dgn
User:meaton