LOAD AND RESISTANCE FACTOR RATING (LRFR) SUMMARY FOR REINFORCED CONCRETE BOX CULVERTS

LEVEL		VEHICLE	WEIGHT (W) (TONS)	CONTROLLING LOAD RATING (#)	MINIMUM RATING FACTORS (RF)	TONS = W × RF	STRENGTH I LIMIT STATE									COMMENT NUMBER
							LIVE-LOAD FACTORS $\gamma_{(LL)}$	MOMENT				SHEAR				
								RATING FACTOR	BOX NO.	ELEMENT TYPE	DISTANCE FROM LEFT END OF ELEMENT (ft)	RATING FACTOR	BOX NO.	ELEMENT TYPE	DISTANCE FROM LEFT END OF ELEMENT (ft)	
DESIGN LOAD RATING		HL-93 (INVENTORY)	N/A	1	1.04	--	1.75	1.04	1	TOP SLAB	6.33	1.09	1	TOP SLAB	0.84	
		HL-93 (OPERATING)	N/A		1.35	--	1.35	1.35	1	TOP SLAB	6.33	1.41	1	TOP SLAB	0.84	
		HS-20 (INVENTORY)	36.000	2	1.30	46.86	1.75	1.40	1	TOP SLAB	6.33	1.30	1	TOP SLAB	0.84	
		HS-20 (OPERATING)	36.000		1.69	60.75	1.35	1.81	1	TOP SLAB	6.33	1.69	1	TOP SLAB	0.84	
LEGAL LOAD RATING	SINGLE VEHICLE (SV)	SNSH	13.500		2.36	31.90	1.40	2.54	1	TOP SLAB	6.33	2.36	1	TOP SLAB	0.84	
		SNGARBS2	20.000		2.21	44.17	1.40	2.37	1	TOP SLAB	6.33	2.21	1	TOP SLAB	0.84	
		SNAGRIS2	22.000		2.36	51.99	1.40	2.54	1	TOP SLAB	6.33	2.36	1	TOP SLAB	0.84	
		SNCOTTS3	27.250	3	1.30	35.38	1.40	1.30	1	TOP SLAB	6.33	1.36	1	TOP SLAB	0.84	
		SNAGGRS4	34.925		1.45	50.61	1.40	1.54	1	TOP SLAB	6.33	1.45	1	TOP SLAB	0.84	
		SNS5A	35.550		1.41	50.29	1.40	1.42	1	TOP SLAB	6.33	1.41	1	BOTTOM SLAB	0.90	
		SNS6A	39.950		1.41	56.26	1.40	1.42	1	TOP SLAB	6.33	1.41	1	BOTTOM SLAB	0.90	
		SNS7B	42.000		1.41	59.15	1.40	1.42	1	TOP SLAB	6.33	1.41	1	BOTTOM SLAB	0.90	
	TRUCK TRACTOR SEMI-TRAILER (TTST)	TNAGRIT3	33.000		2.09	68.81	1.40	2.54	1	TOP SLAB	6.33	2.09	1	BOTTOM SLAB	0.90	
		TNT4A	33.075		1.55	51.17	1.40	1.55	1	TOP SLAB	6.33	1.62	1	TOP SLAB	0.84	
		TNT6A	41.600		1.43	59.59	1.40	1.46	1	TOP SLAB	6.33	1.43	1	TOP SLAB	0.84	
		TNT7A	42.000		1.51	63.59	1.40	1.51	1	TOP SLAB	6.33	1.56	1	TOP SLAB	0.84	
		TNT7B	42.000		1.45	60.87	1.40	1.48	1	TOP SLAB	6.33	1.45	1	TOP SLAB	11.82	
		TNAGRIT4	43.000		1.48	63.52	1.40	1.48	1	TOP SLAB	6.33	1.55	1	TOP SLAB	0.84	
		TNAGT5A	45.000		1.51	67.89	1.40	1.51	1	TOP SLAB	6.33	1.58	1	TOP SLAB	11.82	
		TNAGT5B	45.000		1.55	69.62	1.40	1.55	1	TOP SLAB	6.33	1.62	1	TOP SLAB	0.84	

LOAD FACTORS:

DESIGN LOAD RATING FACTORS

LOAD TYPE	MAX FACTOR	MIN FACTOR
DC	1.25	0.90
DW	1.50	0.65
EV	1.30	0.90
EH	1.35	0.90
ES	1.35	0.90
LS	1.75	--
WA	1.00	--

NOTE:

RATING FACTORS ARE BASED ON THE STRENGTH I LIMIT STATE.

COMMENTS:

1.
2.
3.
4.

(#) CONTROLLING LOAD RATING

(1) DESIGN LOAD RATING (HL-93)

(2) DESIGN LOAD RATING (HS-20)

(3) LEGAL LOAD RATING **

** SEE CHART FOR VEHICLE TYPE

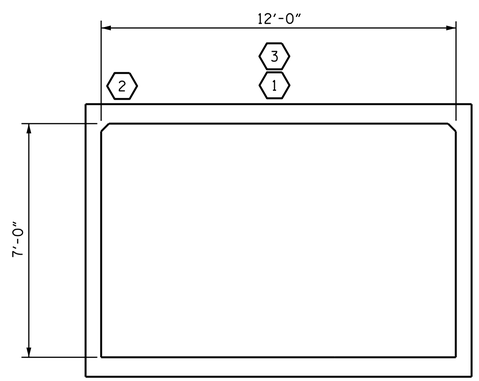

LRFR SUMMARY

(LOOKING DOWNSTREAM)

PROJECT NO. R-3620

WASHINGTON COUNTY

STATION: 148+73.00 -L

SHEET 5 OF 5

STATE OF NORTH CAROLINA
DEPARTMENT OF TRANSPORTATION
RALEIGH

STANDARD

LRFR SUMMARY FOR REINFORCED CONCRETE BOX CULVERTS
(NON-INTERSTATE TRAFFIC)

5/1/2014

NORTH CAROLINA PROFESSIONAL SEAL 025516 ENGINEER EMILY E. MURRAY

DocuSigned by: Emily Murray
CAEB97AEDC5B4E0...

REVISIONS							SHEET NO.
NO.	BY:	DATE:	NO.	BY:	DATE:		C-5
1			3				TOTAL SHEETS
2			4				5

ASSEMBLED BY : N.D'Aiuto DATE : 2/27/13
CHECKED BY : M.AHMED DATE : 3/12/13

DRAWN BY : WMC 7/11
CHECKED BY : GM 7/11

REV. 10/1/11 MAA/GM

01-MAY-2014 09:16
R:\Structures\Plans\FinalPlans\R3620_SD_CD.dgn
emurray

STR. #1 STD. NO. LRFR5