PROJECT REFERENCE NO.	SHEET NO.
R-2915D	2C-1

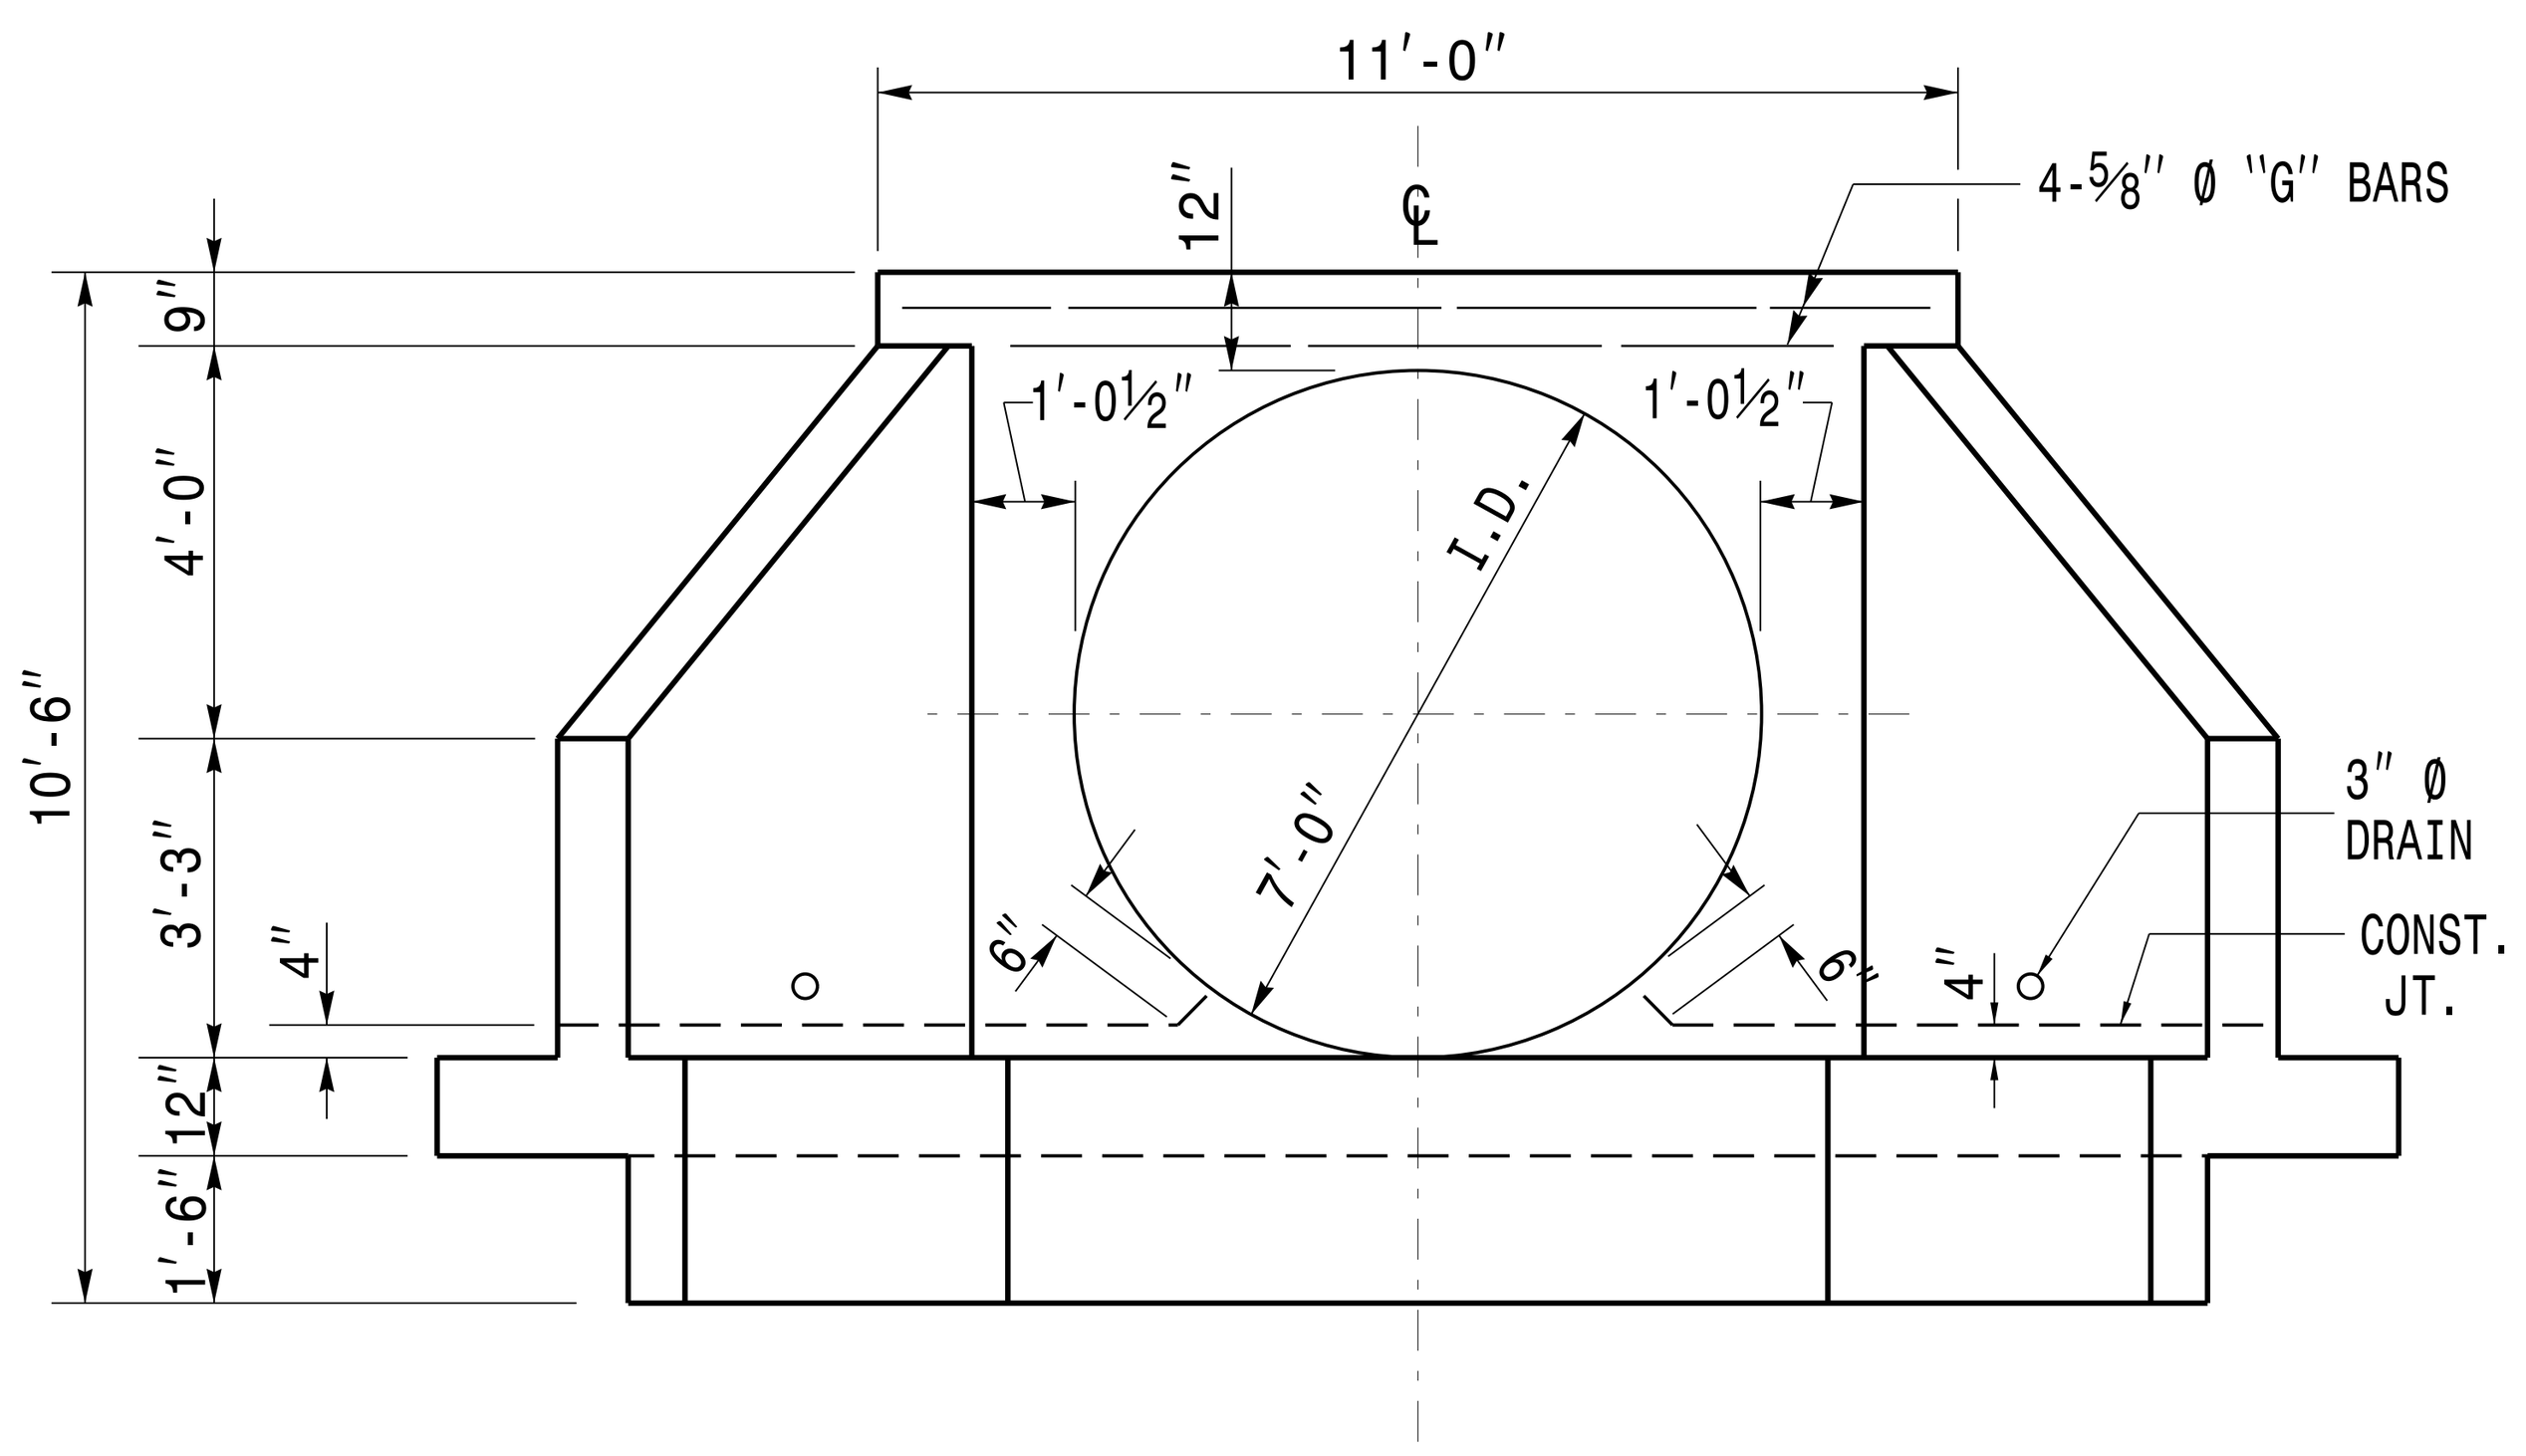

END ELEVATION

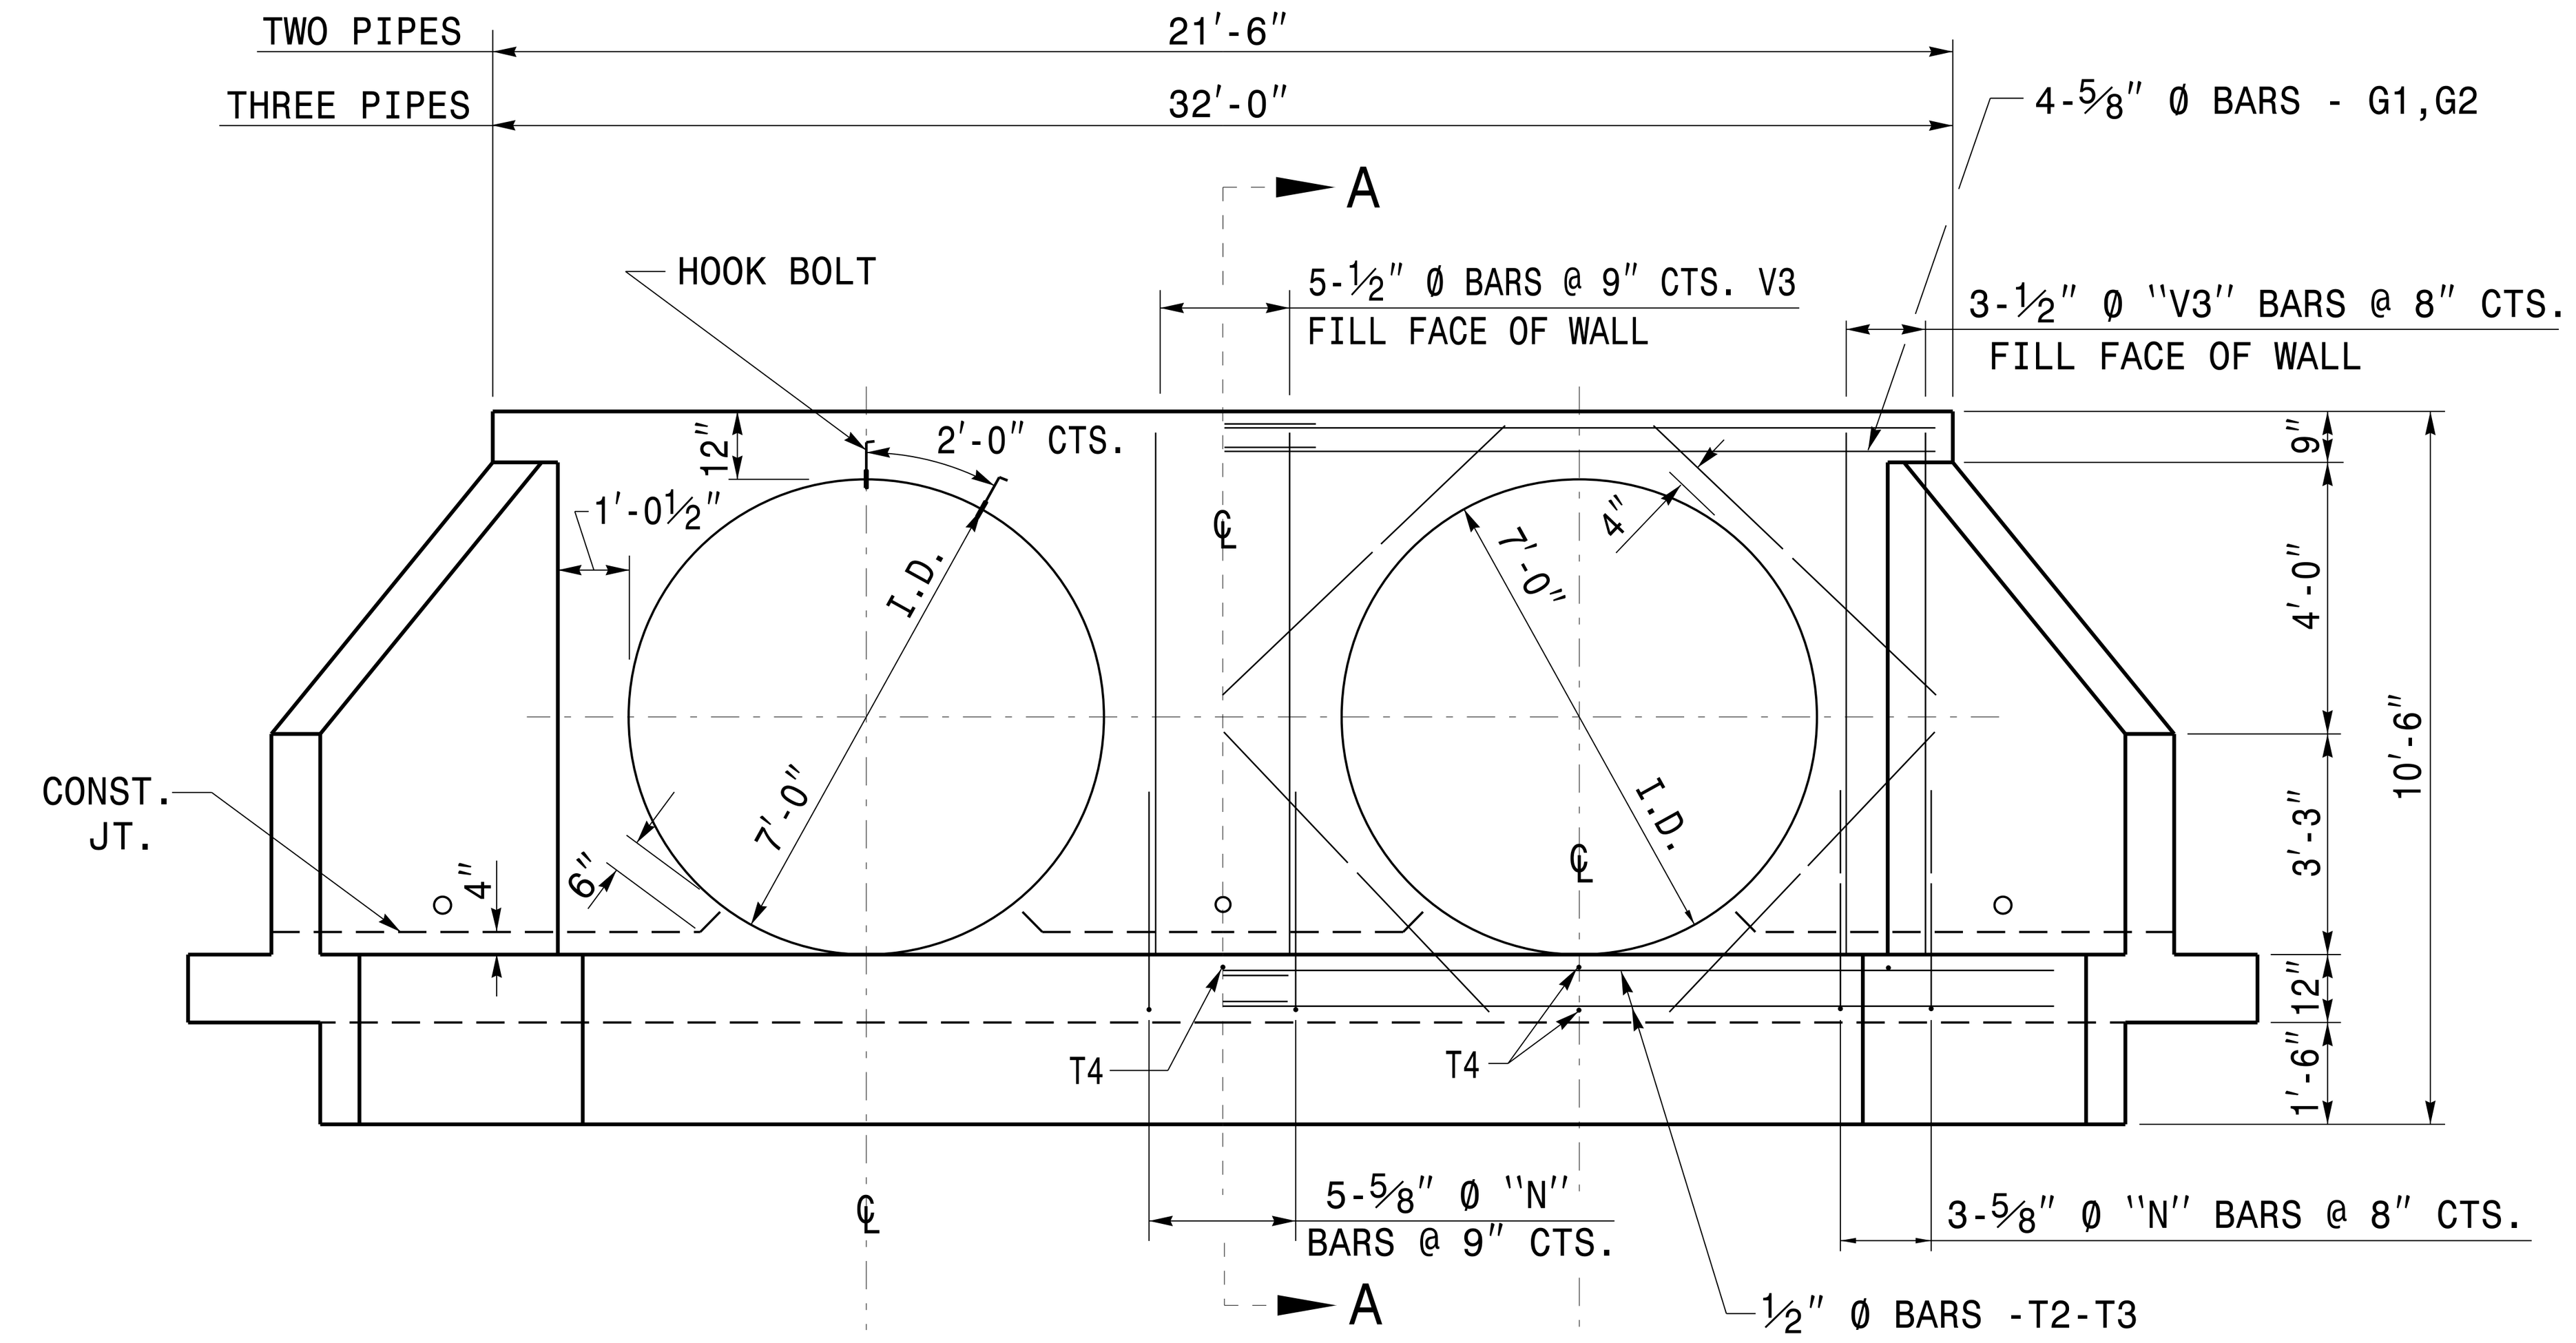

END ELEVATION

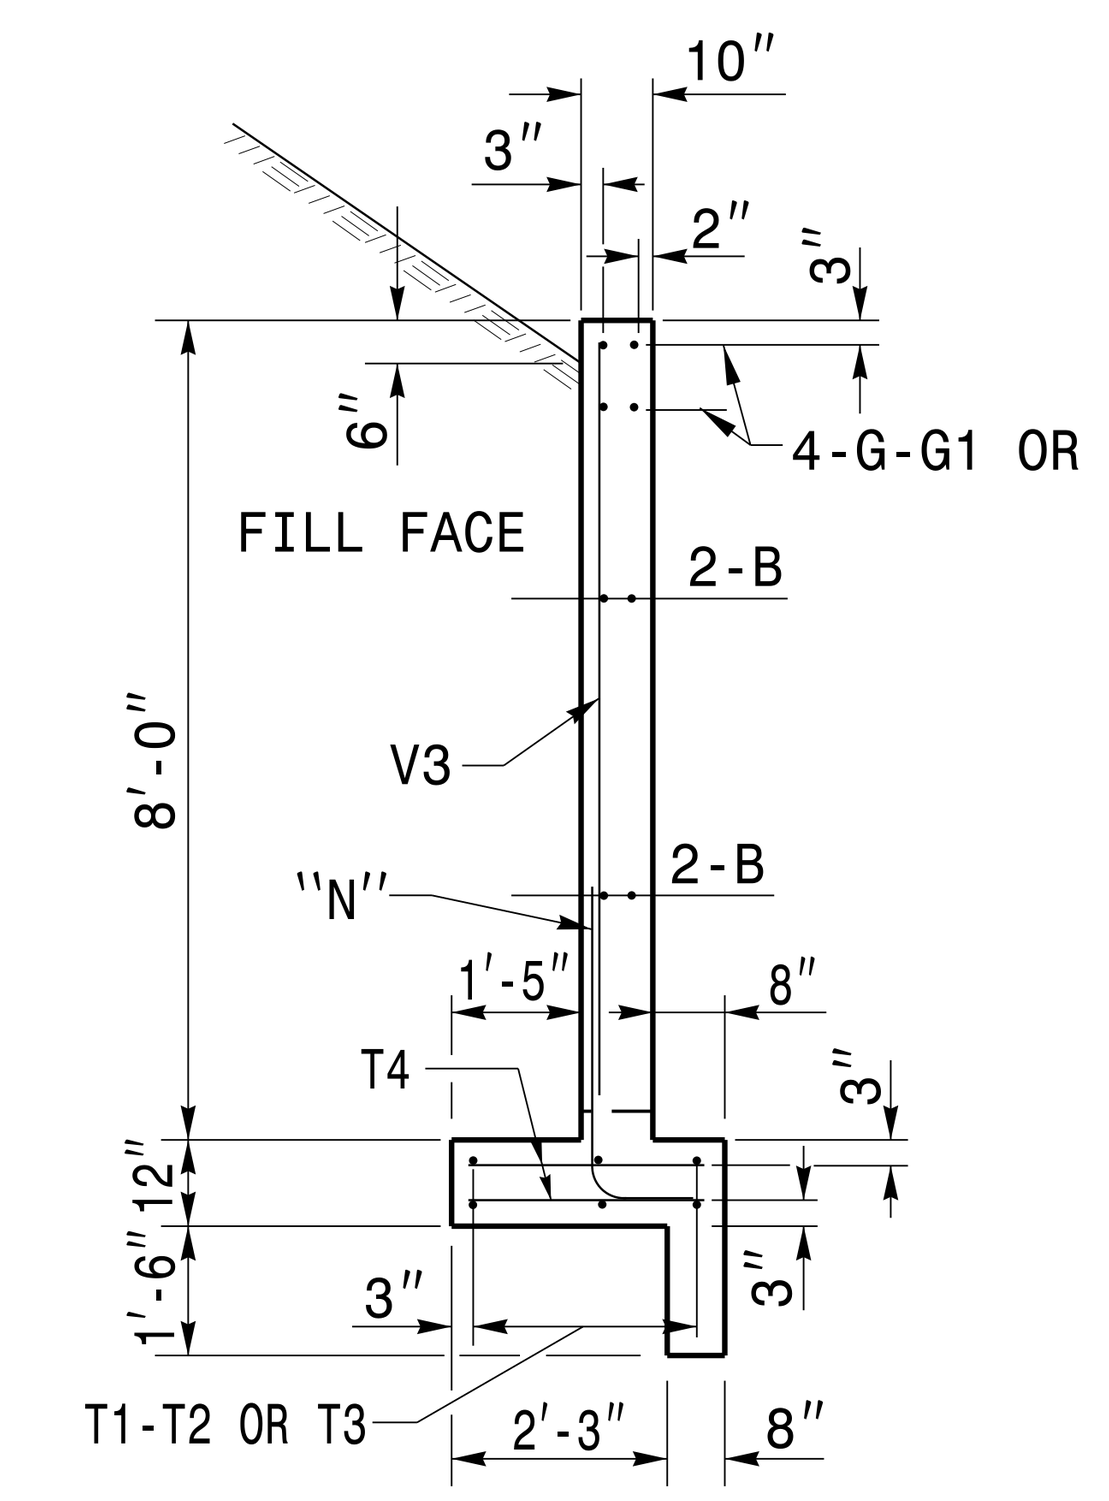

SECTION A-A
FOR ALL ENDWALLS

NOTES:

ALL CONCRETE TO BE CLASS "A".

ALL REINFORCING STEEL SHALL BE ASTMA615-GRADE 60.

ALL REINFORCING STEEL SHALL BE DEFORMED BARS. WHERE SPLICING OF REINFORCMENT IS NECESSARY, BARS ARE TO BE LAPPED 45 DIAMETERS. ALL DIMENSIONS RELATIVE TO REINFORCEMENT ARE TO CENTERS OF BARS.

THE FOOTING, CURTAIN WALL AND 4" OF WALL ARE TO BE POURED IN ONE OPERATION ALLOWING NO TIME FOR INITIAL SET TO TAKE PLACE BETWEEN THEM. THE REMAINING WALL SHALL THEN BE POURED IN ONE OPERATION.

ALL EXPOSED CORNERS ARE TO BE CHAMFERED 1".

3" DIAMETER DRAINS SHALL BE PLACED IN WALL AS SHOWN AND BE 6" ABOVE NORMAL FLOW LINE.

ALL MATERIAL AND WORKMANSHIP AS PER N.C.DEPARTMENT OF TRANSPORTATION STANDARD SPECIFICATIONS.

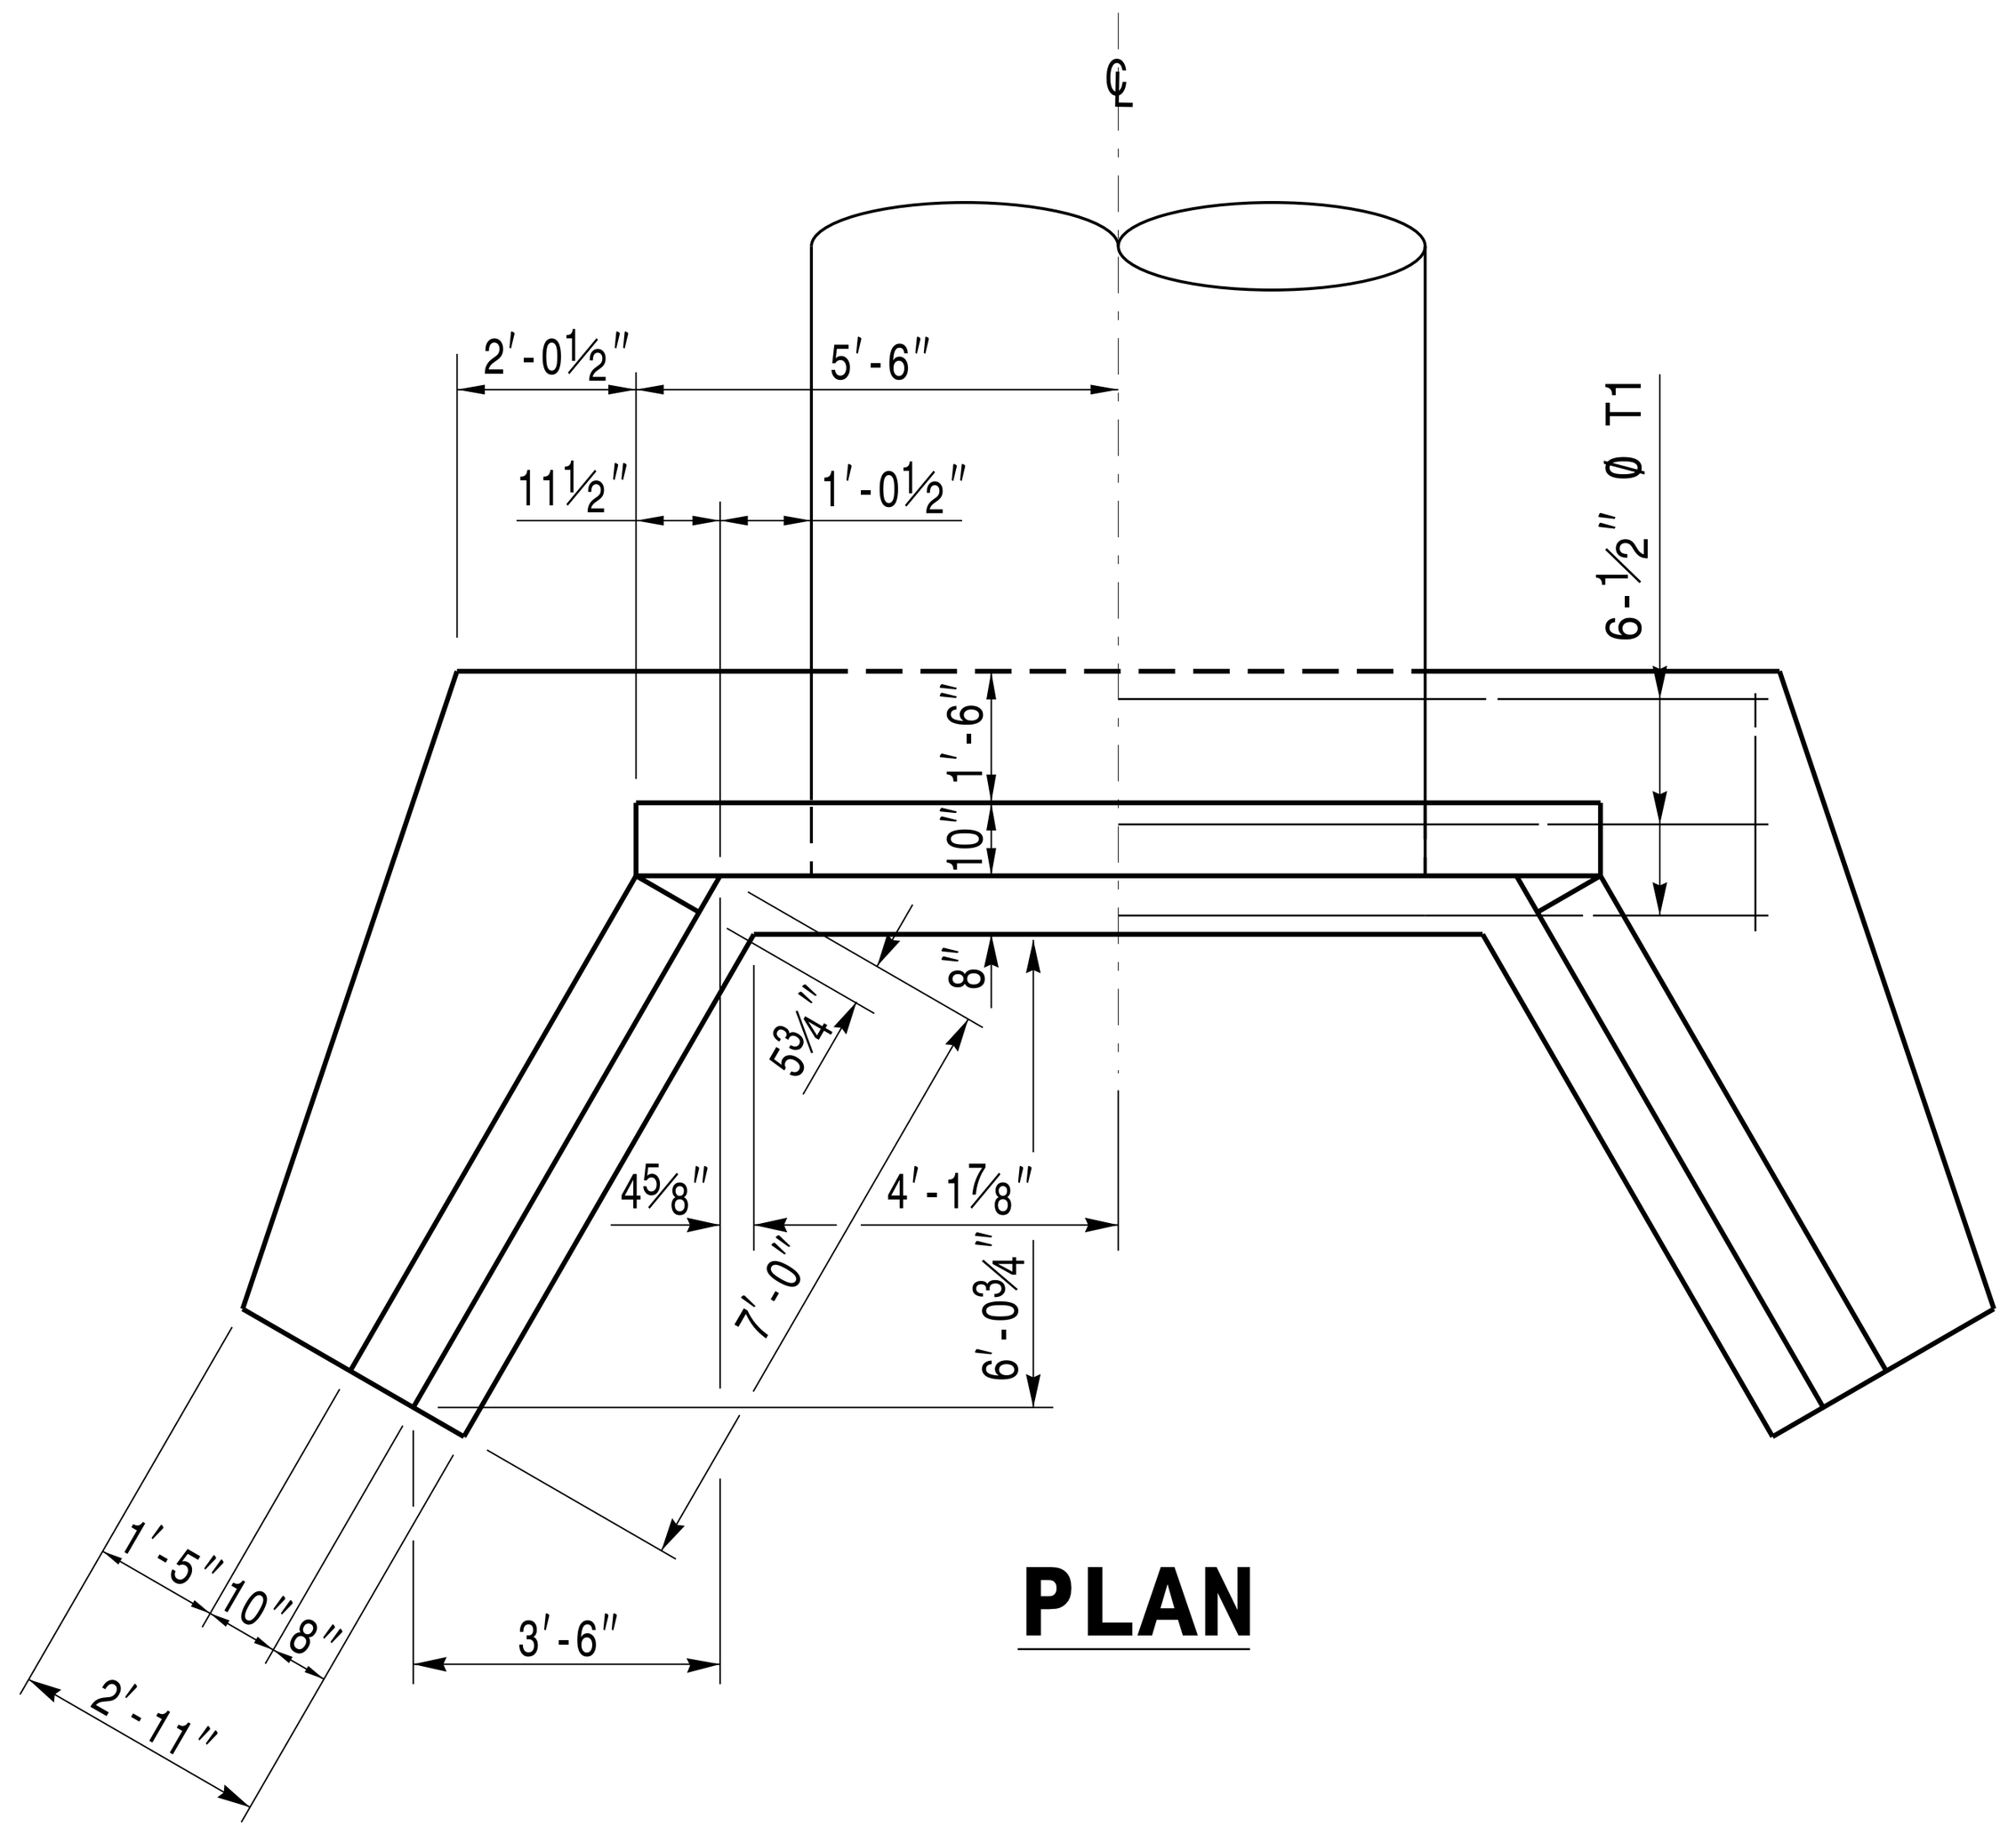

PLAN

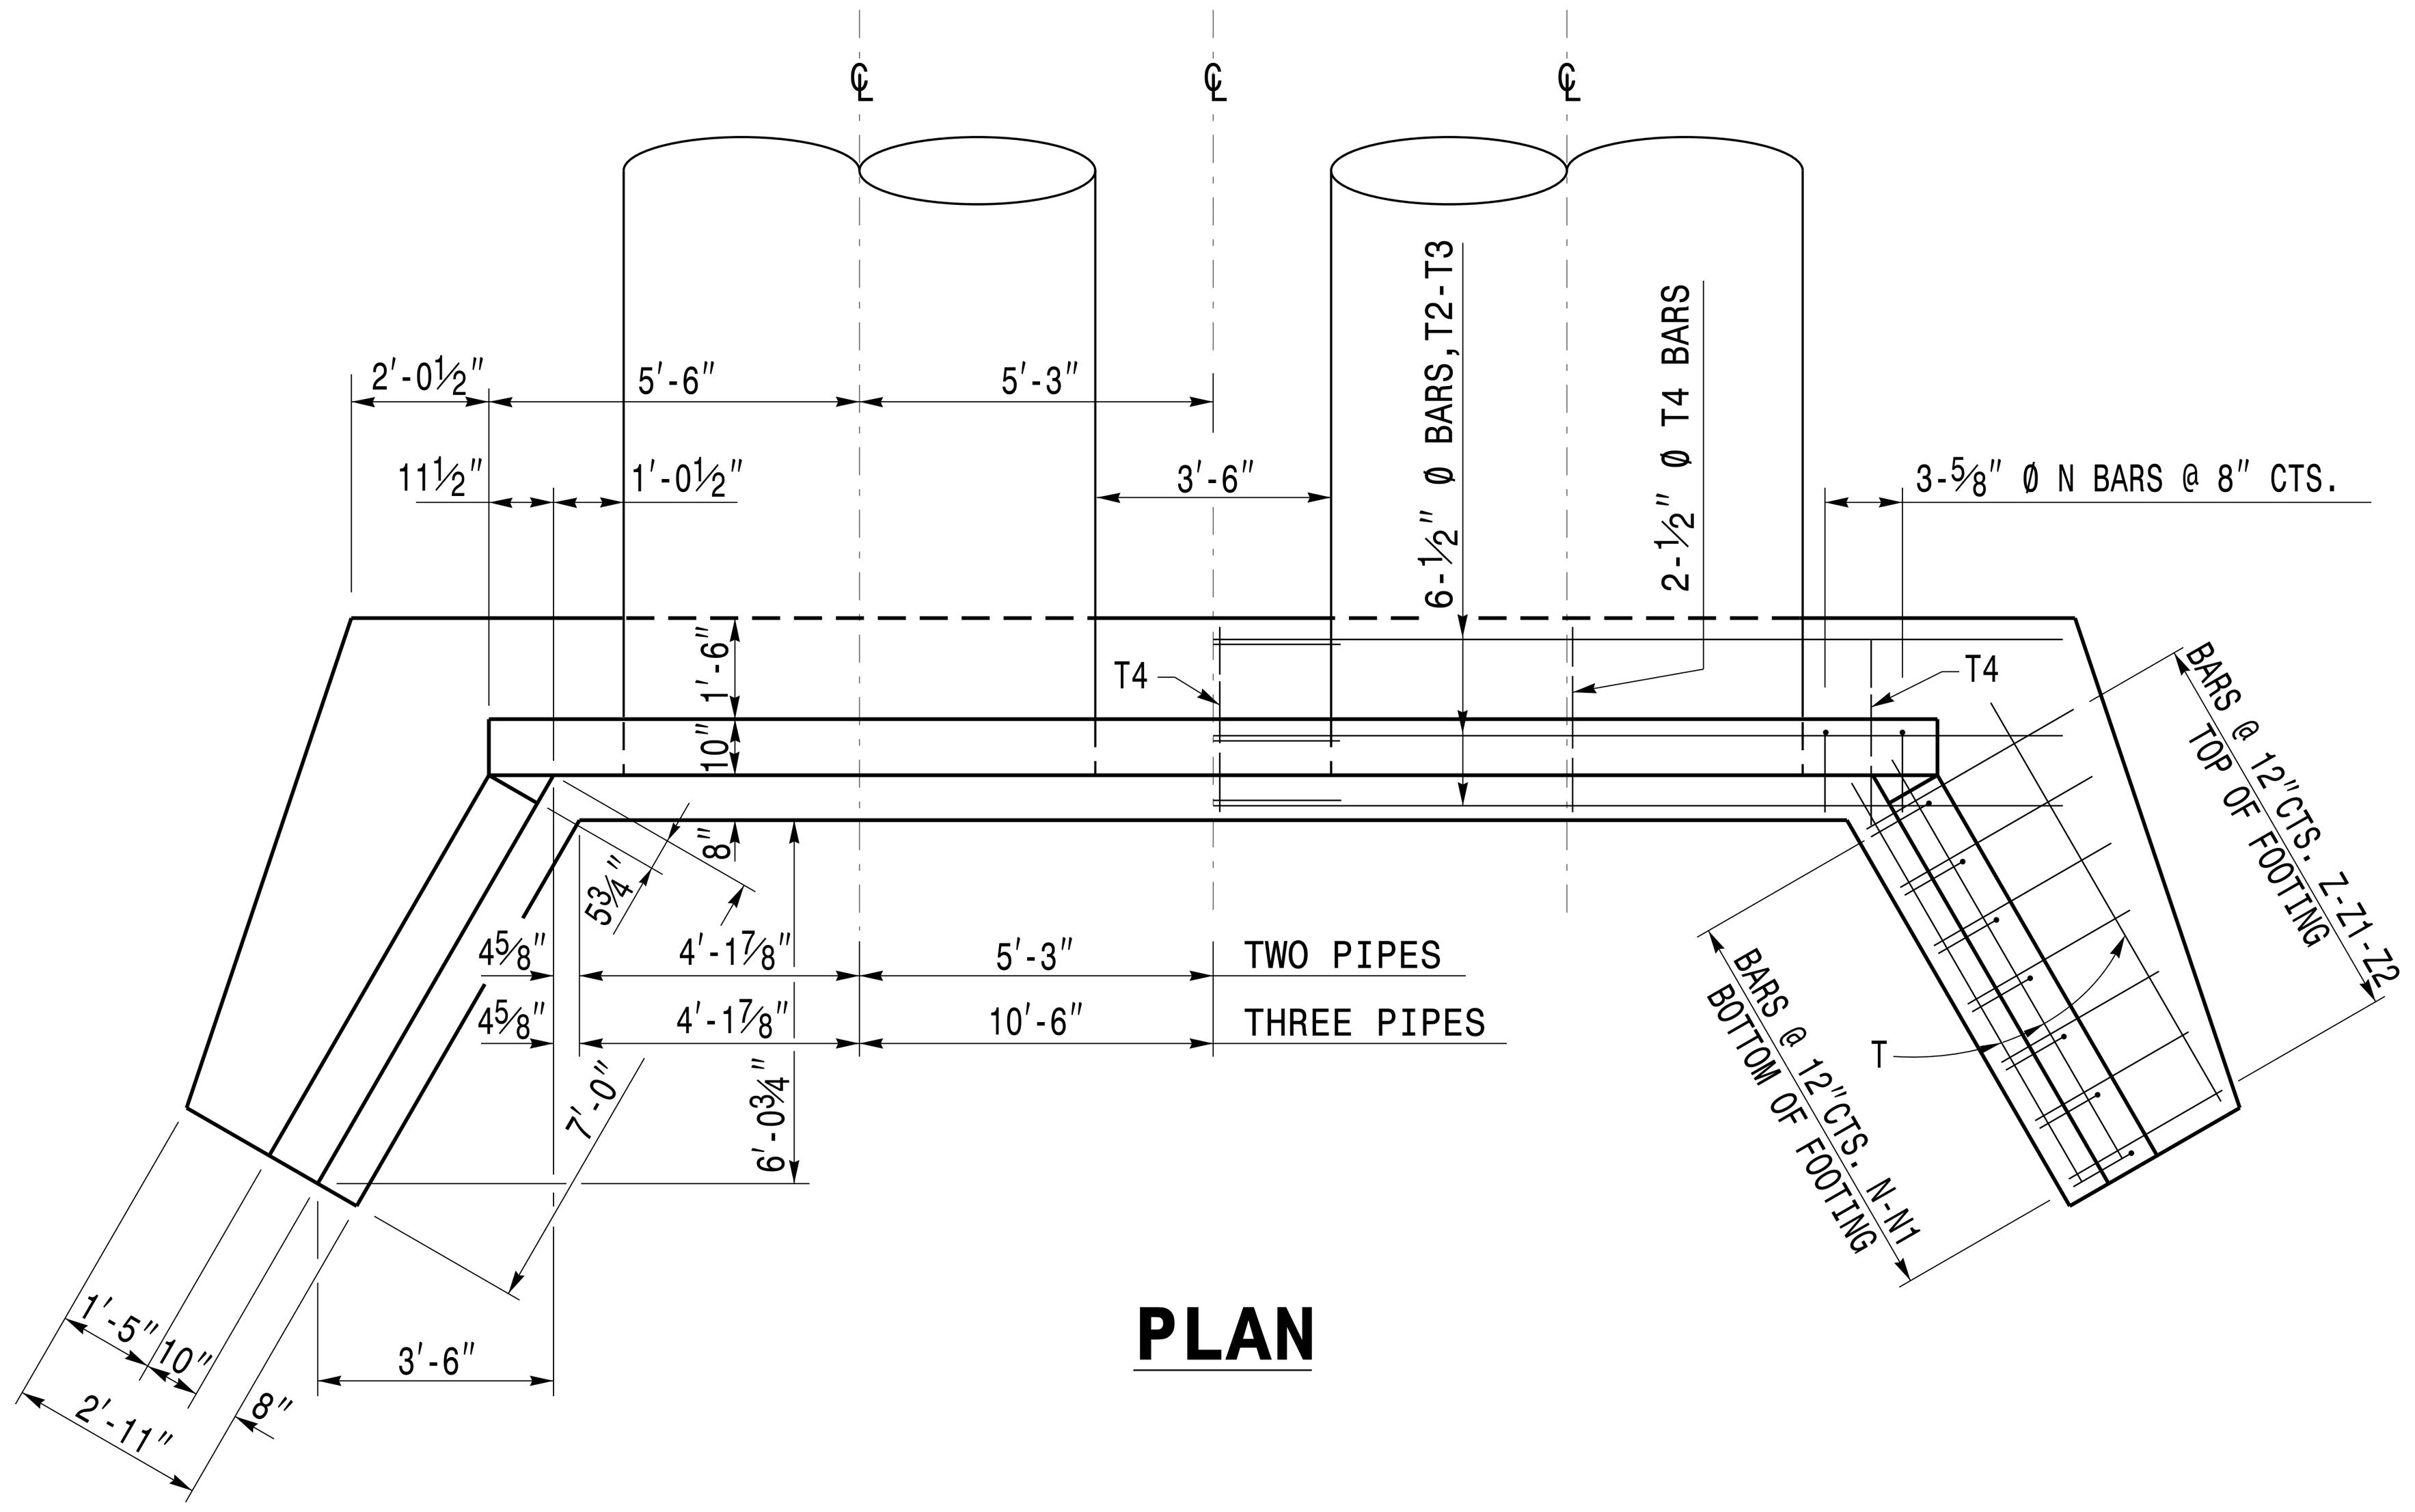

PLAN

BILL OF MATERIAL FOR ONE ENDWALL

REINFORCING STEEL			1 PIPE		2 PIPES		3 PIPES	
BAR	SIZE	LENGTH	NO.	WEIGHT	NO.	WEIGHT	NO.	WEIGHT
B	#4	6'-0"	8	32	16	64	24	96
G	#5	10'-9"	4	45	-	-	-	-
G1	#5	11'-9"	-	-	8	98	-	-
G2	#5	17'-0"	-	-	-	-	8	142
H	#4	9'-0"	10	60	10	60	10	60
H1	#4	7'-0"	6	28	6	28	6	28
H2	#4	3'-9"	4	10	4	10	4	10
N	#5	4'-6"	10	47	15	70	20	94
N1	#4	4'-1"	10	27	10	27	10	27
T	#4	6'-6"	6	26	6	26	6	26
T1	#4	15'-0"	6	60	-	-	-	-
T2	#4	13'-9"	-	-	12	110	-	-
T3	#4	19'-0"	-	-	-	-	12	152
T4	#4	2'-9"	4	7	7	13	10	18
V	#4	5'-9"	6	23	6	23	6	23
V1	#4	4'-6"	6	18	6	18	6	18
V2	#4	2'-9"	8	15	8	15	8	15
V3	#4	7'-6"	6	30	11	55	16	80
Z	#5	4'-9"	4	20	4	20	4	20
Z1	#4	4'-3"	4	11	4	11	4	11
Z2	#4	3'-6"	6	14	6	14	6	14
TOTAL REINF. STEEL (lbs.)				473		662		834
CLASS "A" CONC. (cu. yds.)				7.9		10.8		13.8

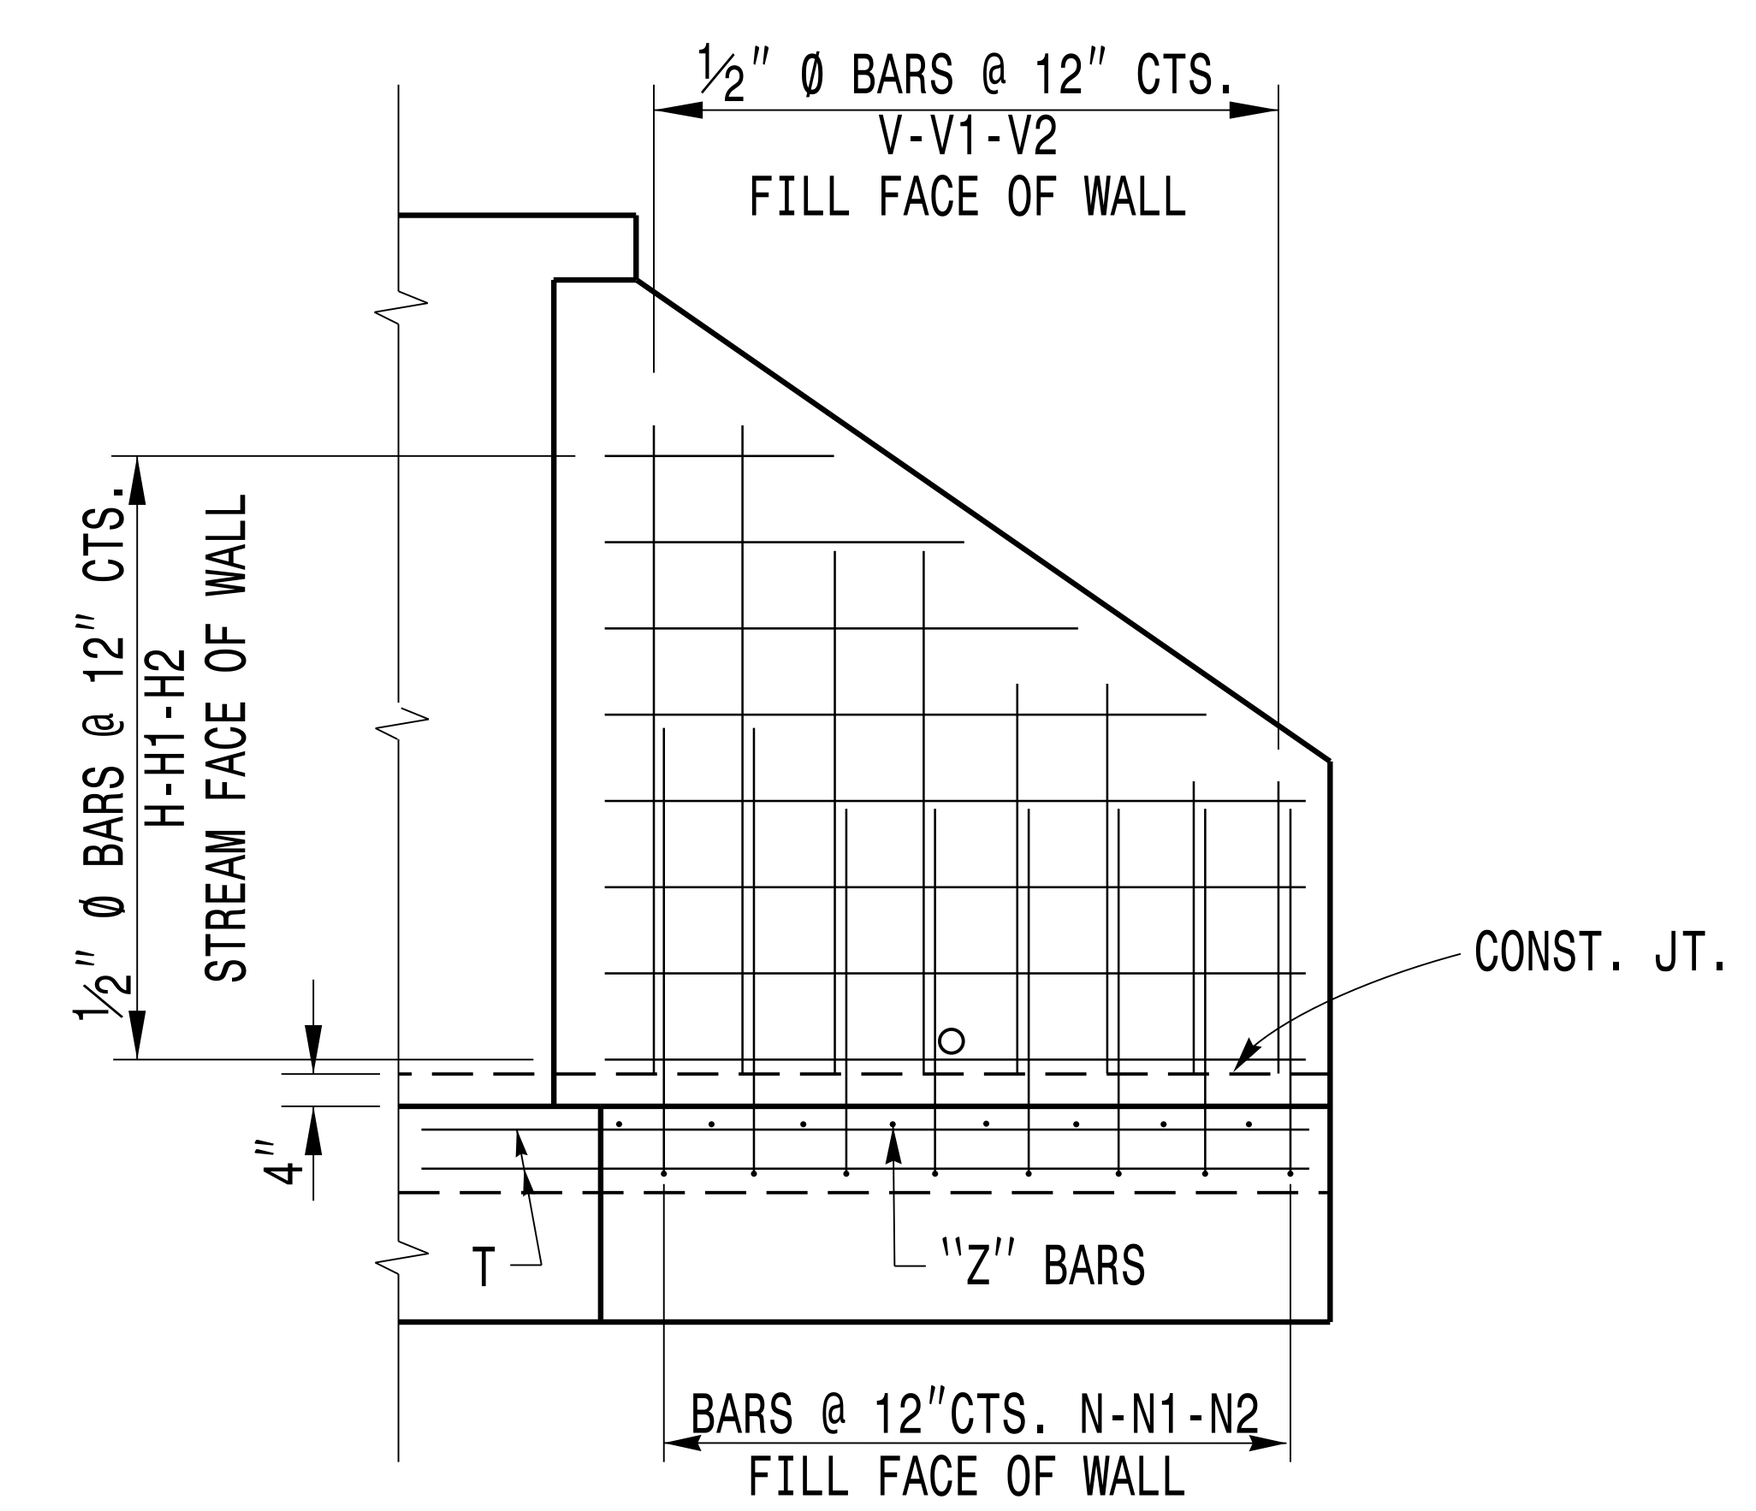

ELEVATION OF WING
SHOWING REINFORCEMENT

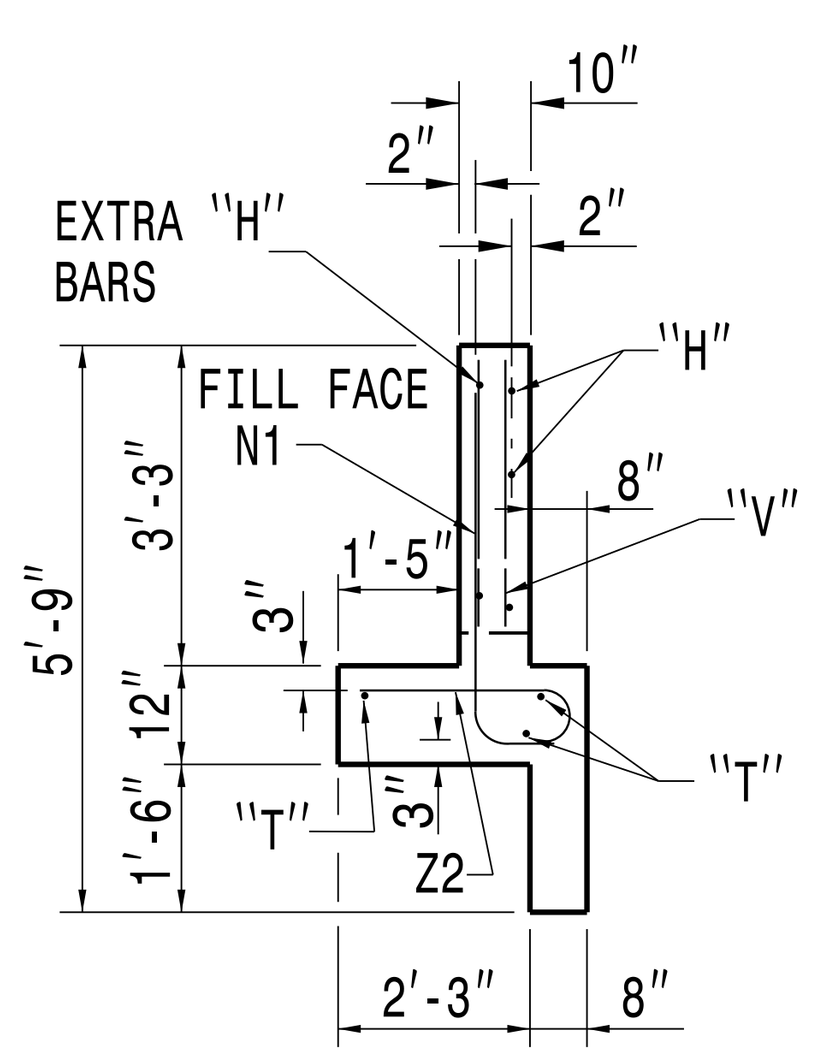

END OF WING

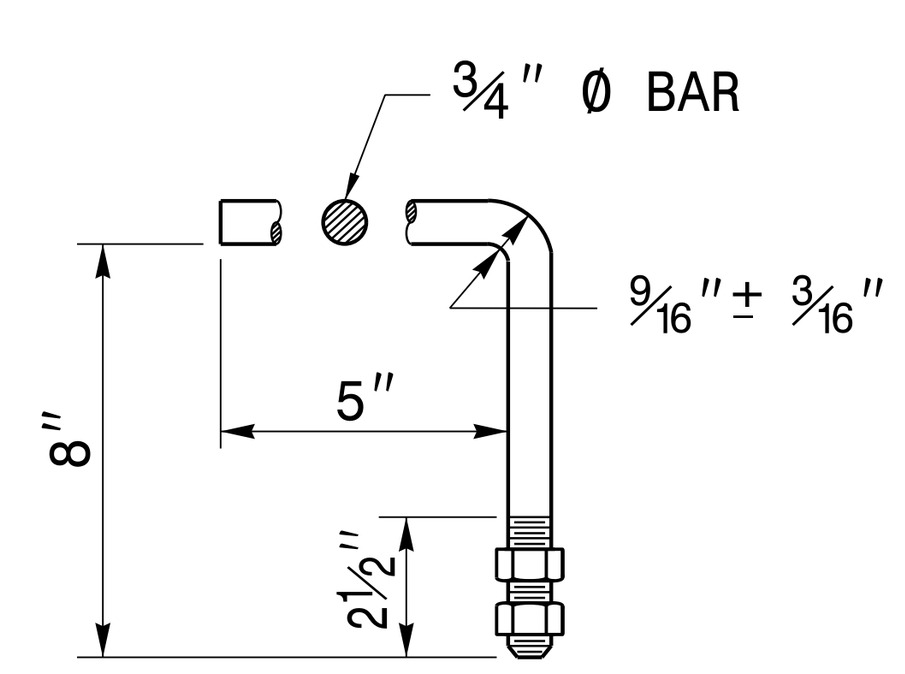

HOOK BOLT

HOOK BOLTS (ANCHORS SHALL BE CONSTRUCTED AT 2'-0" CTS. ALONG THE CIRCUMFERENCE OF THE 7'-0" CSPA. THE HOOK BOLTS SHALL BE EMBEDDED IN THE CONCRETE ENDWALL 8" IN DEPTH. THE GALVANIZED¾" DIA. HOOK BOLTS MUST MEET ASTM A-307 OR ASTM A-836. BOTH BOLTS AND NUTS MUST BE IN ACCORDANCE WITH ASTM A-153 FOR GALVANIZING.

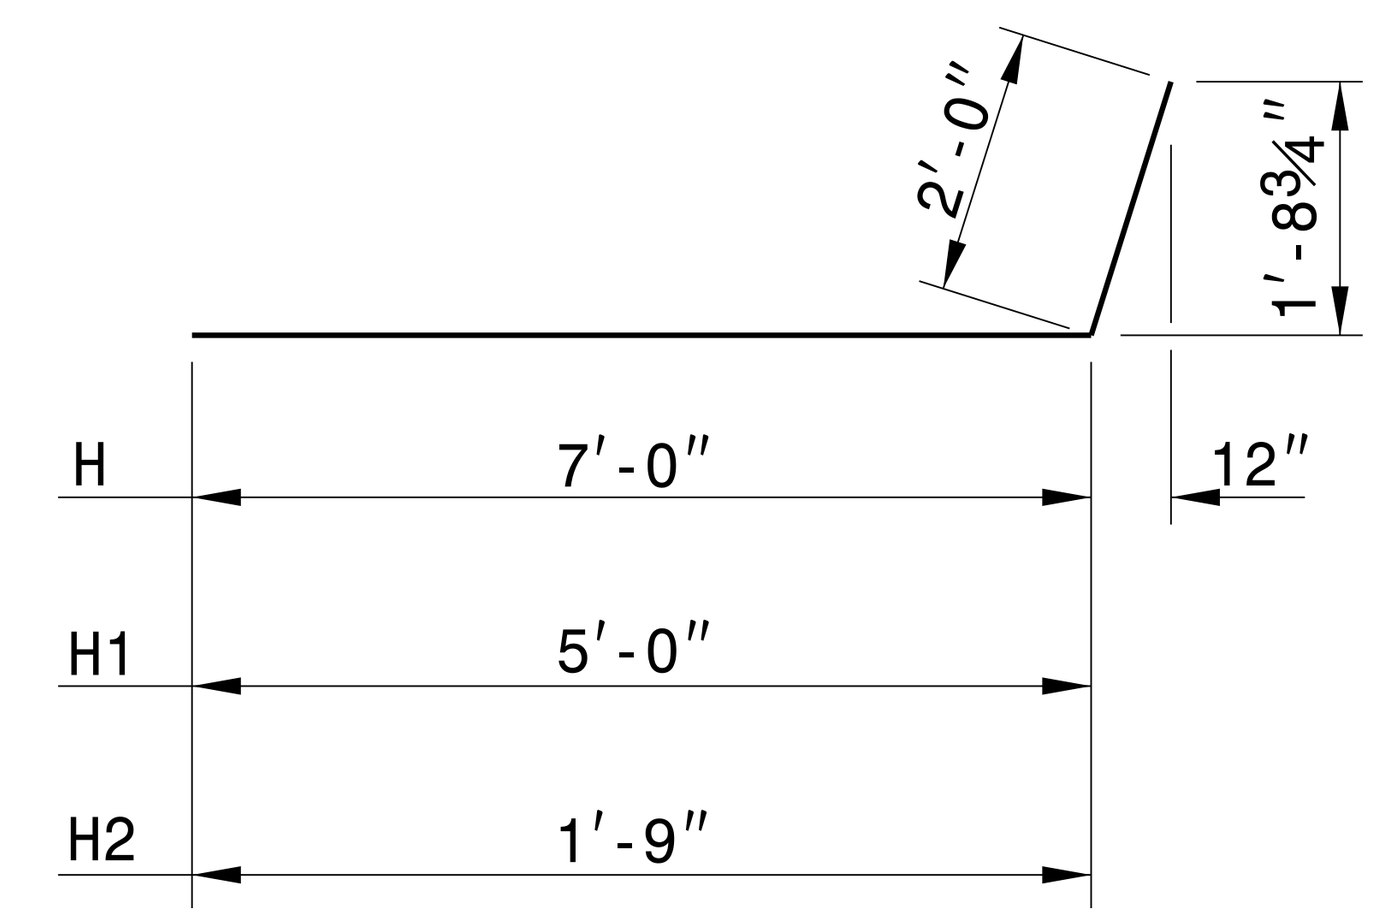

BARS H-H1-H2

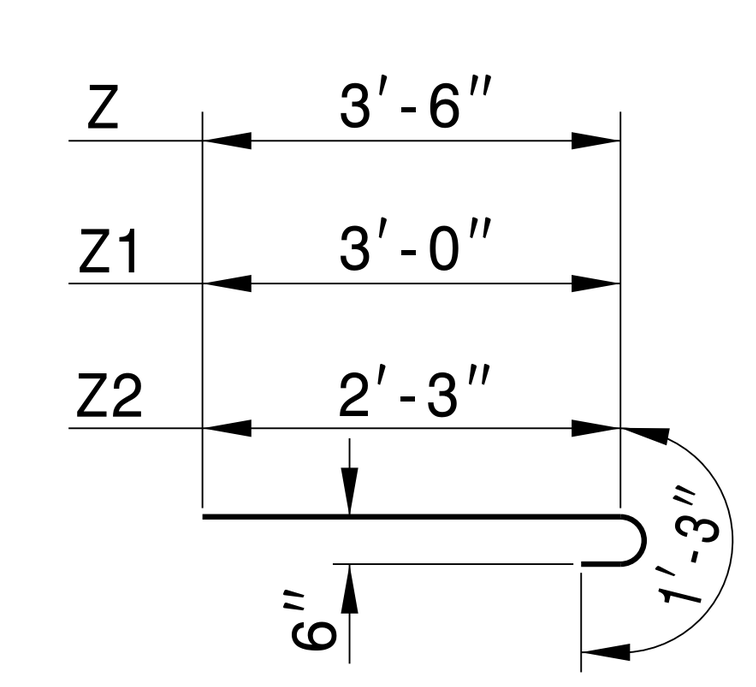

BARS Z-Z1-Z2

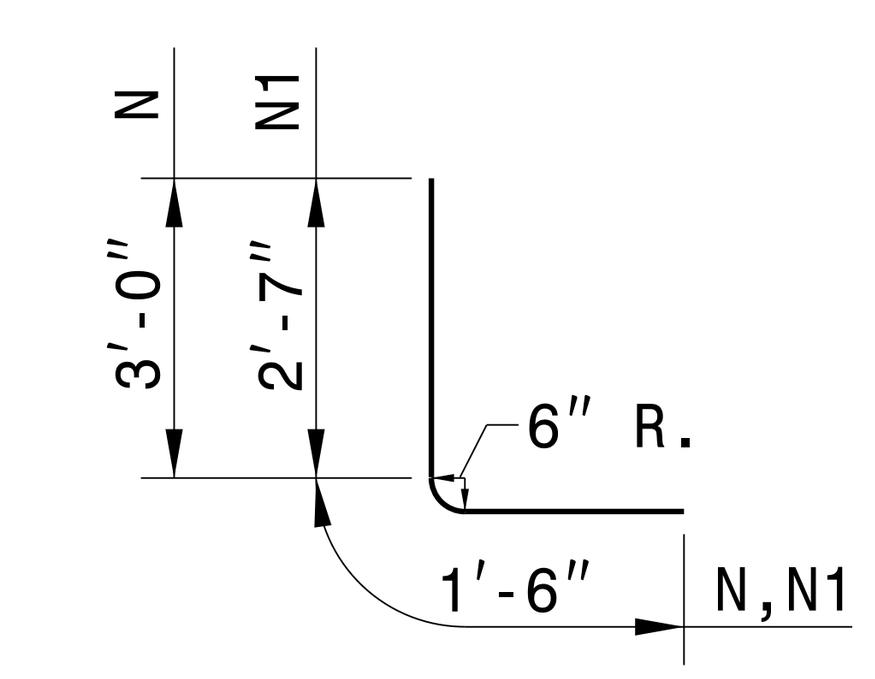

BARS N-N1

12/10/2014

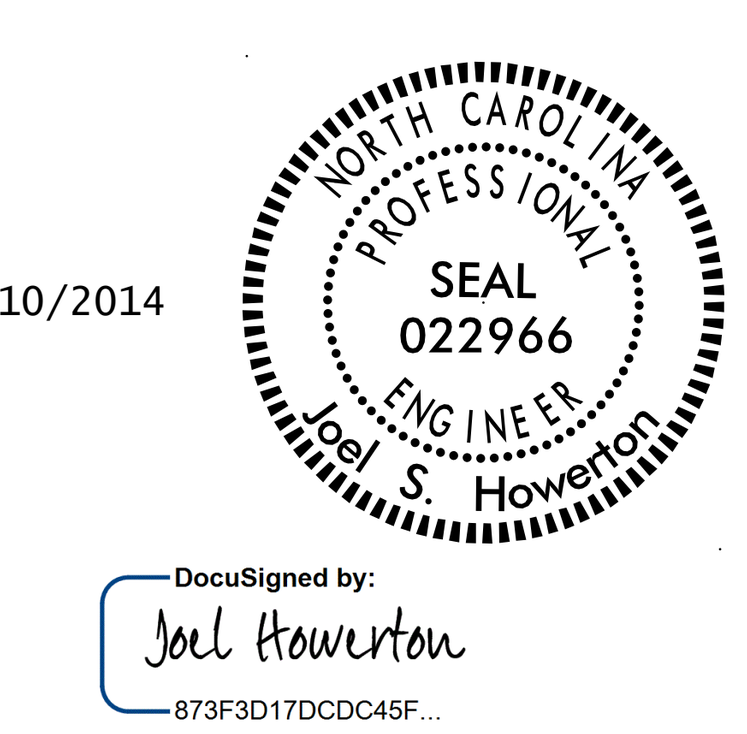

CONTRACT STANDARDS & DEVELOPMENT UNIT
STANDARDS AND SPECIAL DESIGN
Office 919-707-6950 FAX 919-250-4119

DETAIL OF REINFORCED CONCRETE ENDWALL FOR 84" DIAMETER PIPE - 90° SKEW

ORIGINAL BY: R.S.WICKER DATE: 6-46
MODIFIED BY: R.E.D.&T.S.S. DATE: 6-96 & 5-00
CHECKED BY: DATE:
FILE SPEC.: details/nbritt/english/hydro/endwall90sk.dgn

$$$$$$SYSTIME$$$$$
$$$$$$$$$DGN$$$$$$$$$$$$$$$$$
$$$$USERNAME$$$$