

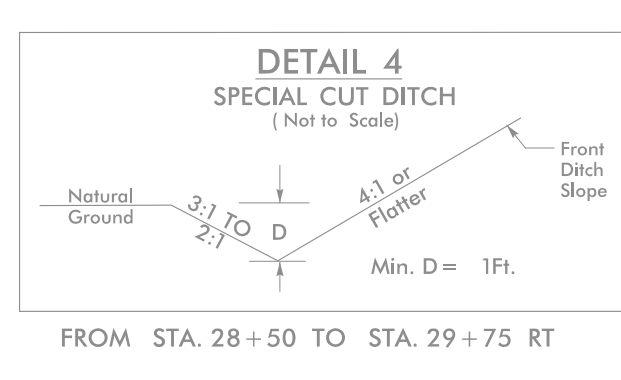
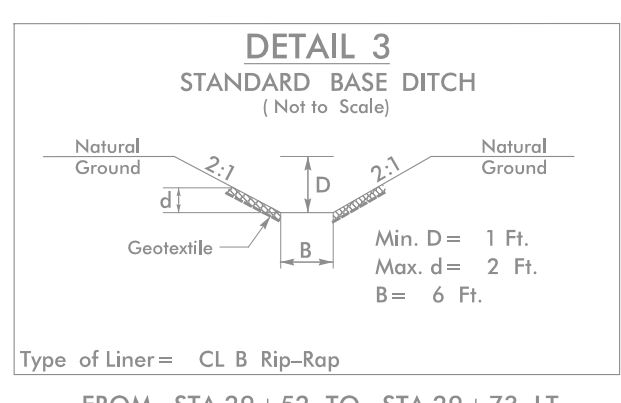
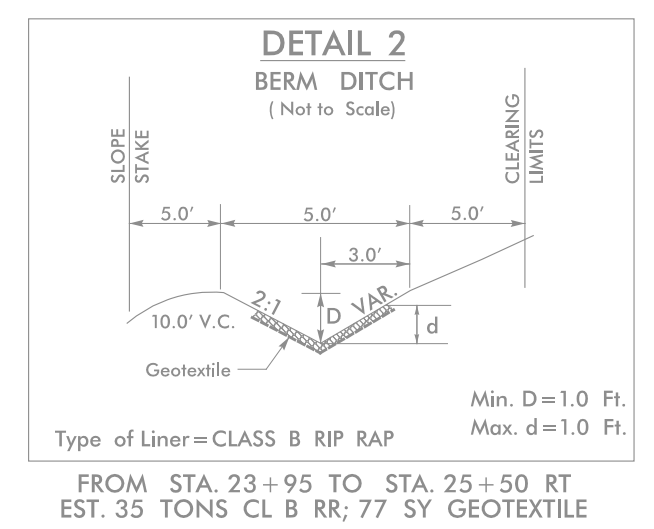
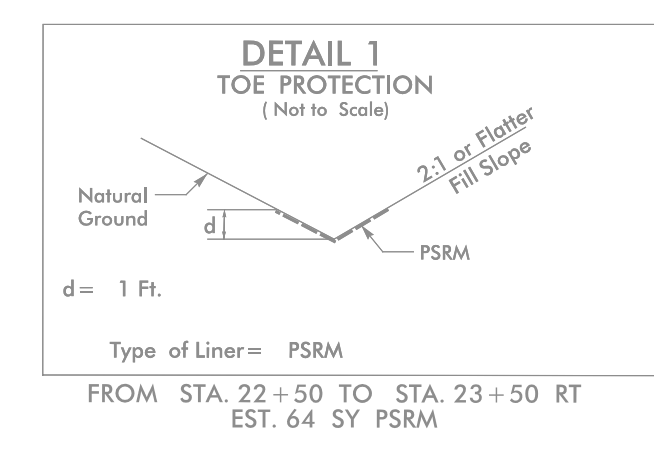


CLEARING AND GRUBBING
EROSION CONTROL FOR
CONSTRUCTION SHEET 5

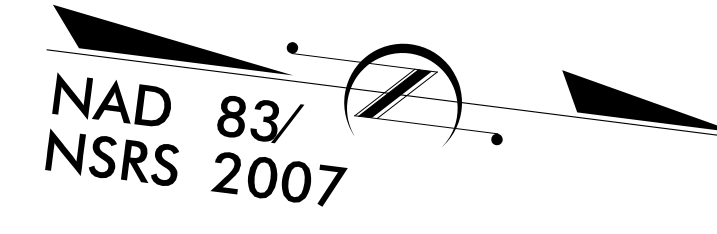

NOTE: PLACE TEMPORARY ROCK SEDIMENT DAMS TYPE - B AND TEMPORARY ROCK SILT CHECKS TYPE - A AT DRAINAGE OUTLETS.

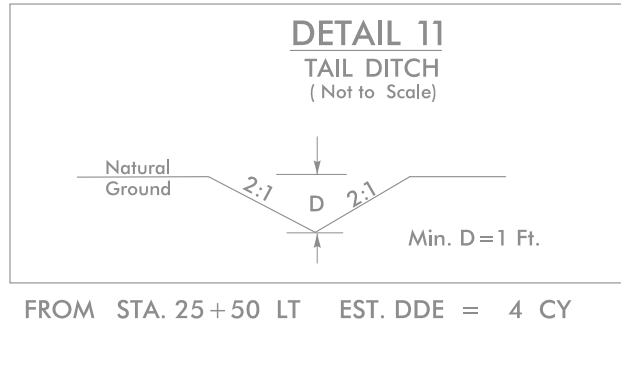


30 x 30 x 3
1.5 inch Skimmer
with 0.75 inch
Orifice Diameter
12 ft weir
ID 1.

8/17/99

1. ADDED PUE (8-14-2013)

\$\$\$ TIME \$\$\$
\$\$\$ ENGINEER \$\$\$
\$\$\$ CHECKER \$\$\$
\$\$\$ DATE \$\$\$

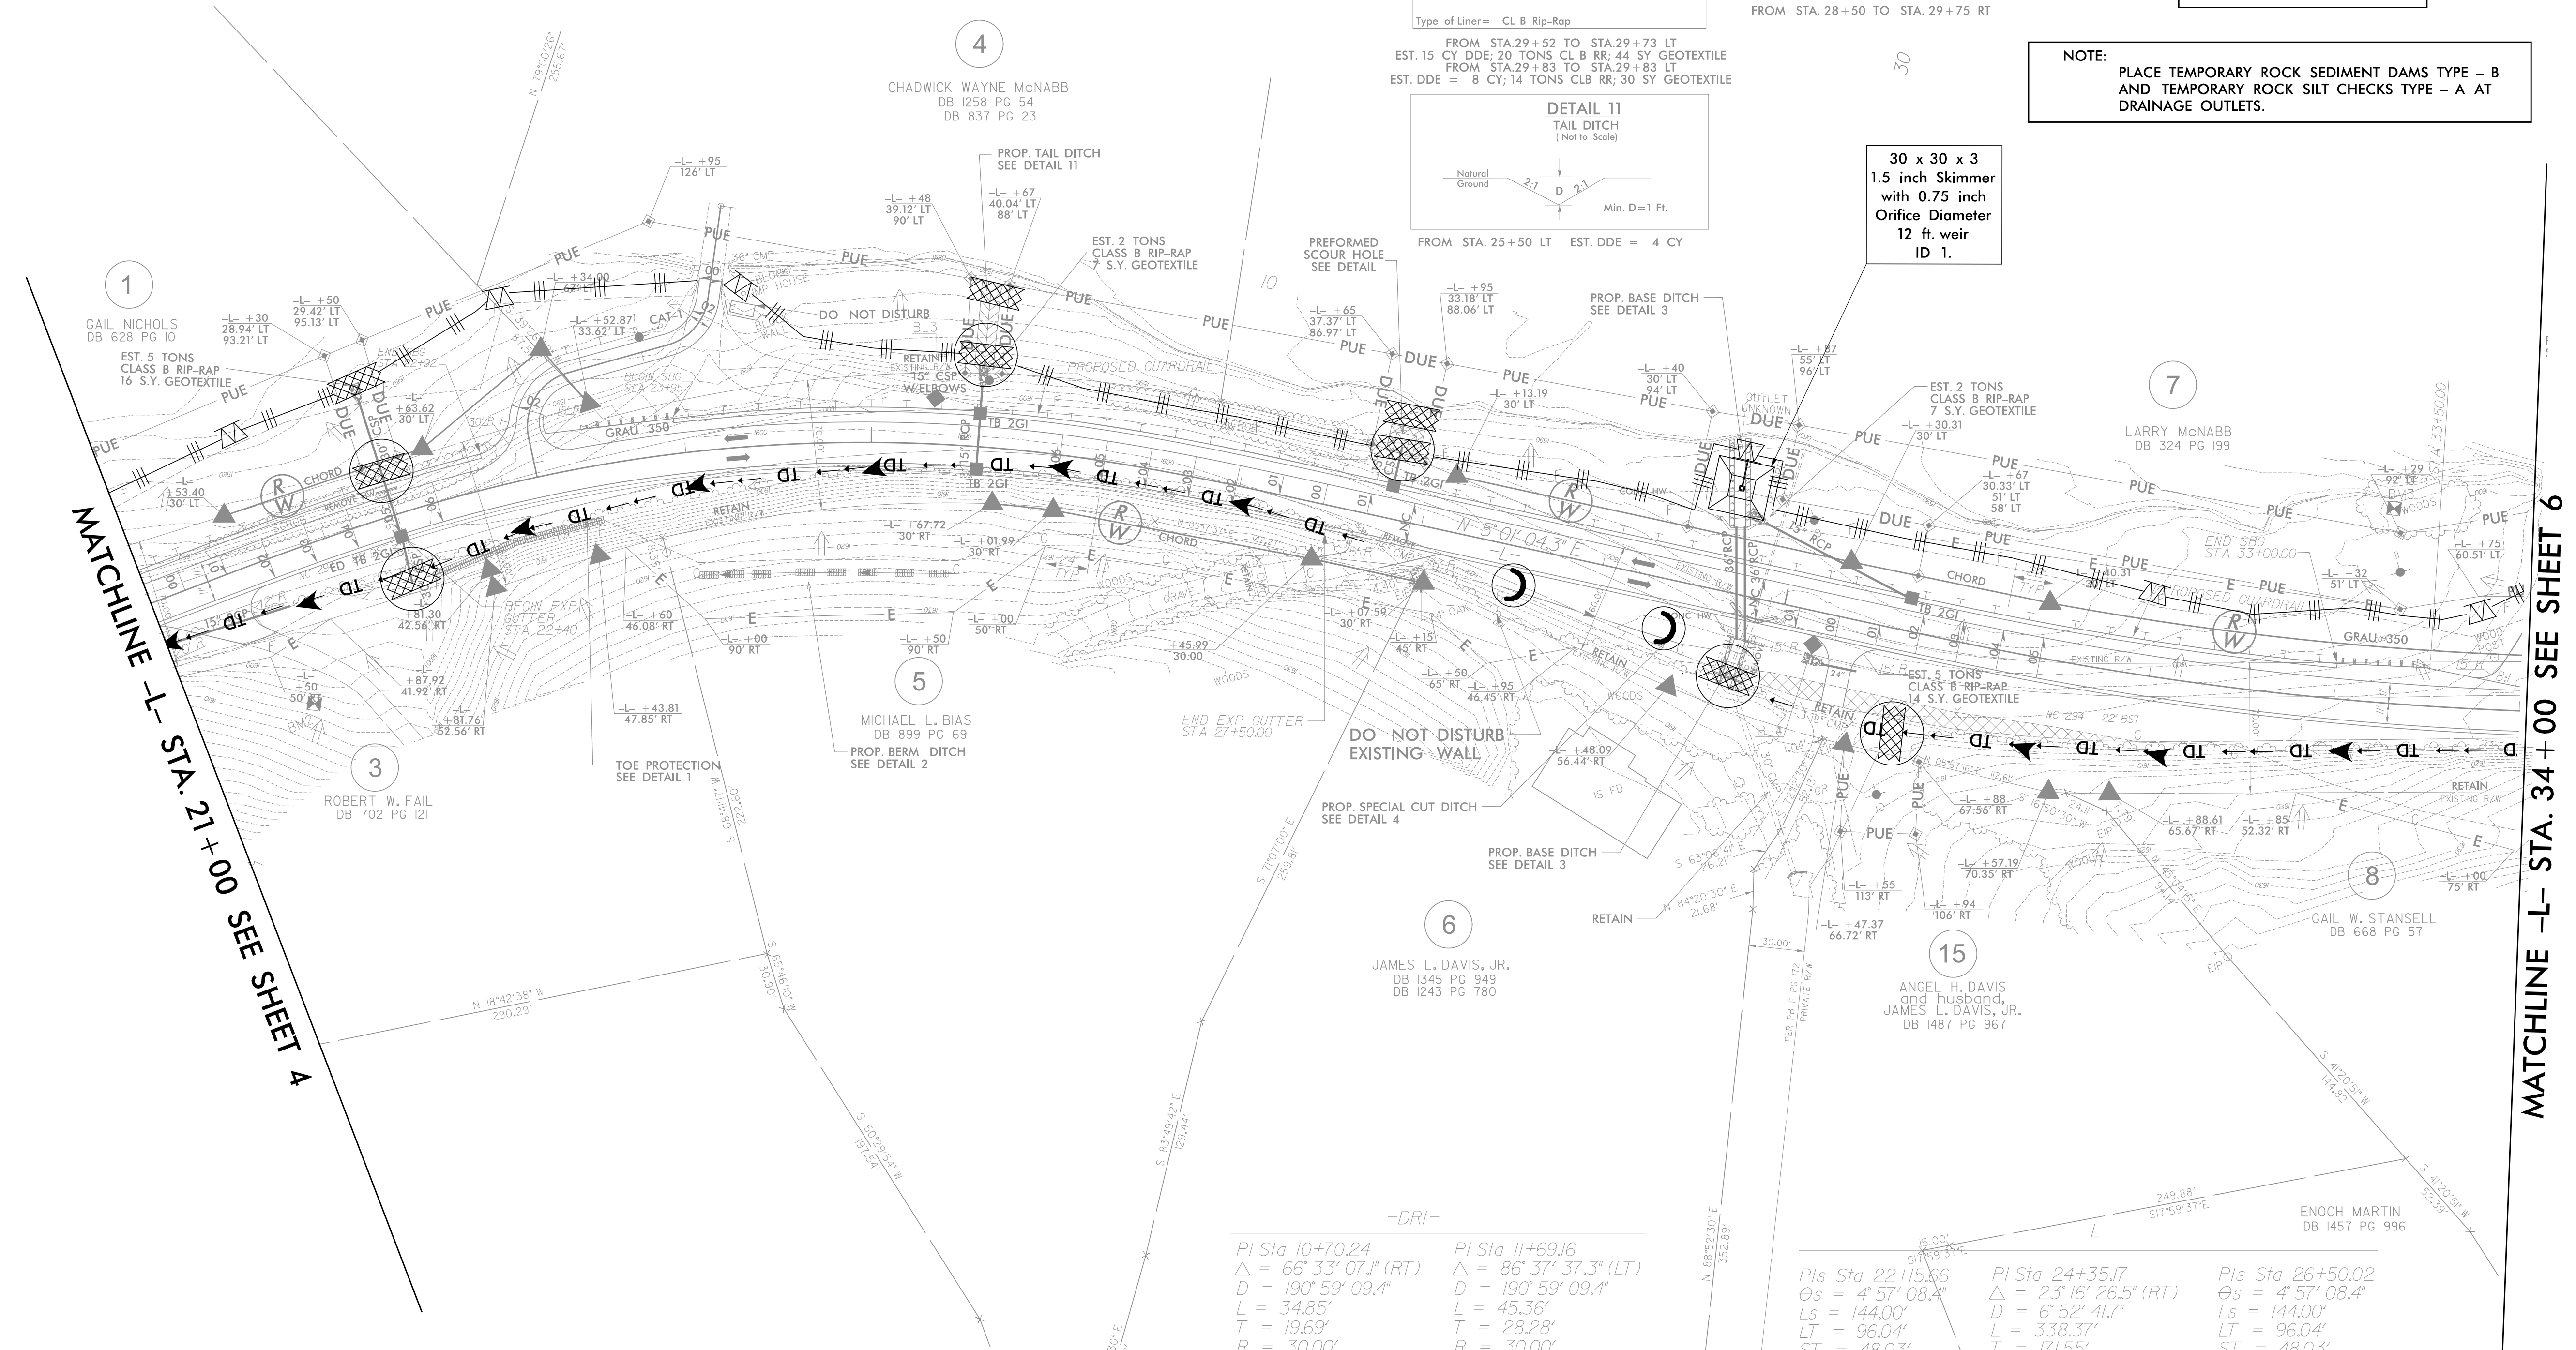

-DRI-

PI Sta 10+70.24 Δ = 66° 33' 07.1" (RT) D = 190° 59' 09.4" L = 34.85' T = 19.69' R = 30.00'	PI Sta 11+69.16 Δ = 86° 37' 37.3" (LT) D = 190° 59' 09.4" L = 45.36' T = 28.28' R = 30.00'
---	---

PIs Sta 22+15.66 Os = 4° 57' 08.4" Ls = 144.00' LT = 96.04' ST = 48.03'	PI Sta 24+35.17 Δ = 23° 16' 26.5" (RT) D = 6° 52' 41.7" L = 338.37' R = 833.00'	PIs Sta 26+50.02 Os = 4° 57' 08.4" Ls = 144.00' LT = 96.04' ST = 48.03'
---	---	---

PIs Sta 31+03.64 Os = 1° 46' 13.4" Ls = 110.00' LT = 73.34' ST = 36.67'	PI Sta 35+41.13 Δ = 25° 22' 50.9" (LT) D = 3° 13' 07.9" L = 788.50' T = 400.83' R = 1,780.00'	PIs Sta 39+65.48 Os = 1° 46' 13.4" Ls = 110.00' LT = 73.34' ST = 36.67'
---	--	---

SEE SHEET 14 FOR -L- PROFILE
SEE SHEET 22 FOR -DRI- PROFILE