

## NOTES

FIELD ADJUSTMENT OF "A" BARS MAY BE NECESSARY FOR PLACEMENT IN COPING.

ALL REINFORCING SHALL BE GRADE 60 AS DESCRIBED IN SECTION 1070 OF THE STANDARD SPECIFICATIONS.


FOR 18" STEEL SHEET PILES, SEE SECTION 1084-2 OF THE STANDARD SPECIFICATIONS.

INSTALL SHEET PILING TO THE MINIMUM DEPTH SHOWN ON PLANS OR AS DIRECTED BY THE ENGINEER.

FIELD ADJUSTMENT OF THE COPING/WING WALL INTERFACE

MAY BE NECESSARY, AS DIRECTED BY THE ENGINEER.

## PLAN

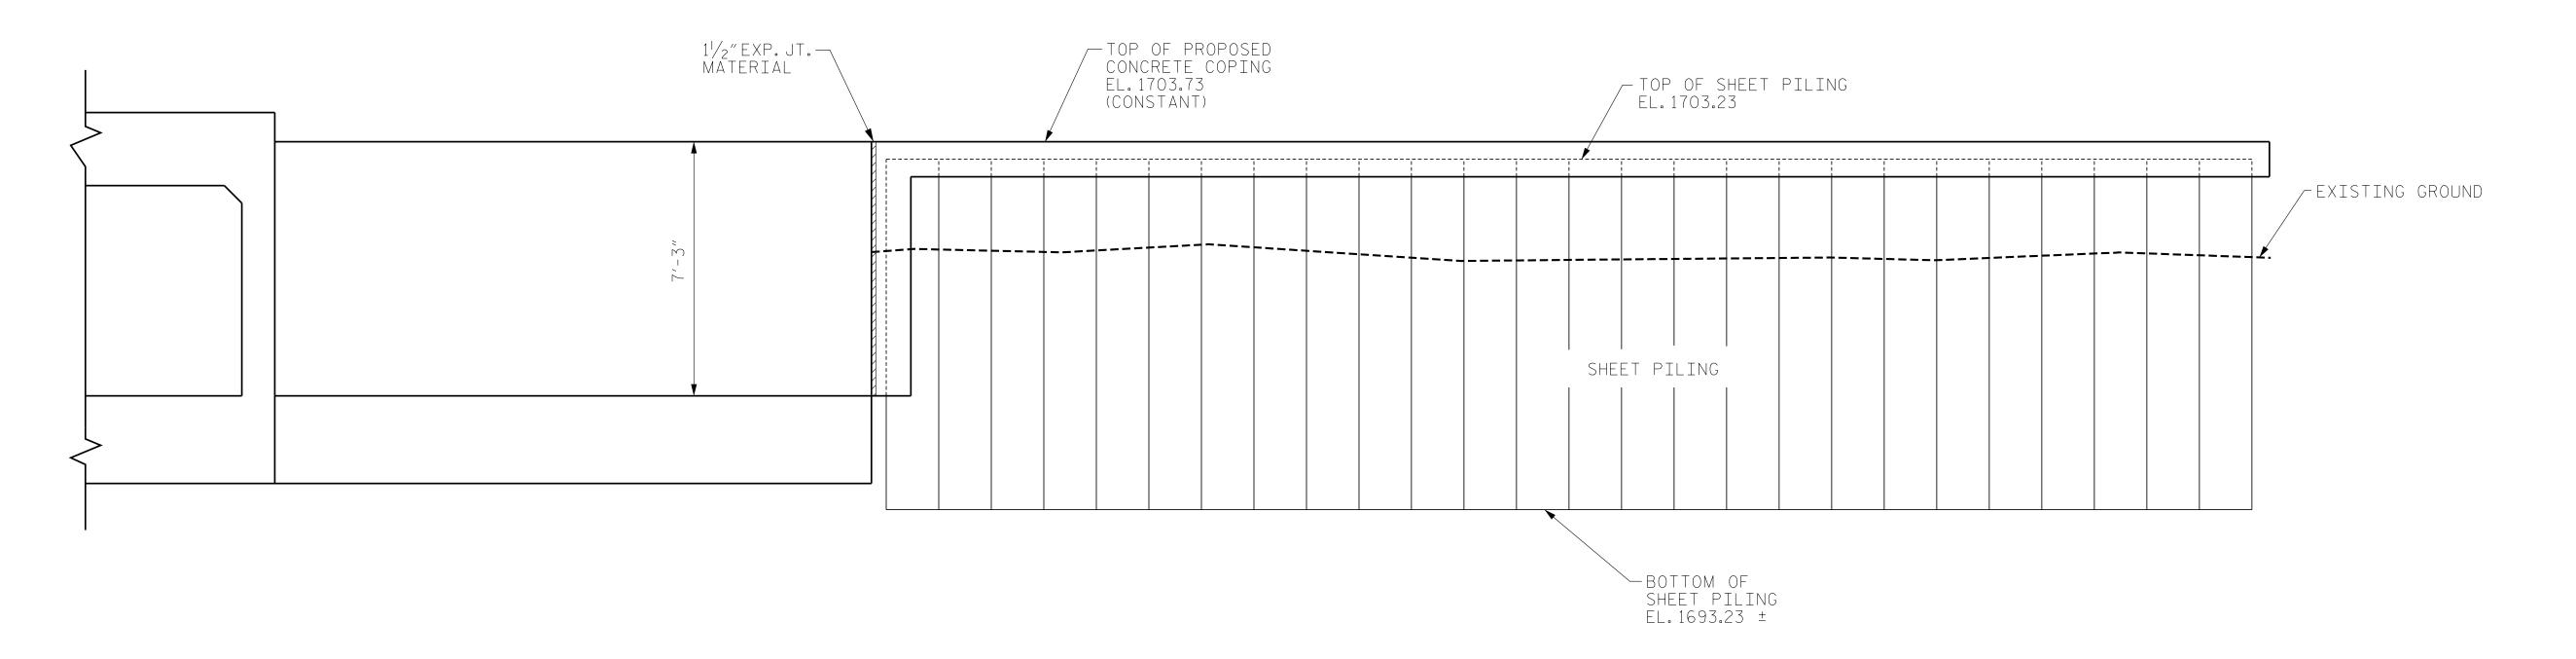

WALL ENVELOPE





☐ Knoxville, TN 865 • 546 • 5800 □ Spartanburg,SC 864 • 574 • 4775 ☐ Charleston, SC

Charlotte, ■ North Carolina

☐ Middlesboro, KY 606 · 248 · 6600 ☐ Asheville, NC ☐ Boone, NC ☐ Atlanta, GA 828 · 828 · 2796 828 · 355 · 9933 770 · 627 · 3509

843 • 974 • 5650

Copyright  $\bigcirc$  2006 Vaughn & Melton, Inc. All Rights Reserved

DATE: MAR 2015 DWN. BY: RWW DATE: MAR 2015 CHKD. BY: HLW DES.EGR. OF RECORD: CBC DATE: MAR 2015

PROJECT NO. R-3622B

<u>CHEROKEE</u> COUNTY STATION: 96+77.46 -L-

SHEET 1 OF 4

STATE OF NORTH CAROLINA DEPARTMENT OF TRANSPORTATION RALEIGH

DOUBLE 8' X 6' CONCRETE BOX CULVERT 45° SKEW

SHEET PILE DETAILS

SHEET NO. REVISIONS S-14 NO. BY: DATE: 10. BY: DATE: TOTAL SHEETS