


## NOTES:

- 1. PROVIDE A  $1\frac{1}{4}$ "HIGH BEAM BOLSTER UPPER AT 4'-0"CTS. ATOP THE METAL STAY-IN-PLACE FORMS TO SUPPORT THE BOTTOM MAT OF "A" BARS. WHEN USING REMOVABLE FORMS, PROVIDE CONTINUOUS HIGH CHAIRS FOR METAL DECK (C.H.C.M.) @ 4'-0" CTS. WITH A HEIGHT TO SUPPORT THE BOTTOM MAT OF "A" BARS A CLEAR DISTANCE OF  $2^{1}/2$ " ABOVE THE TOP OF THE REMOVABLE FORM.
- 2. LONGITUDINAL STEEL MAY BE SHIFTED SLIGHTLY, AS NECESSARY. TO AVOID INTERFERENCE WITH STIRRUPS IN PRESTRESSED CONCRETE GIRDERS.
- 3. BARRIER RAIL IN A CONTINUOUS UNIT SHALL NOT BE CAST UNTIL ALL SLAB CONCRETE HAS BEEN CAST AND HAS REACHED A MINIMUM COMPRESSIVE STRENGTH OF 3000 PSI.
- 4. PREVIOUSLY CAST CONCRETE IN A CONTINUOUS UNIT SHALL HAVE ATTAINED A MINIMUM COMPRESSIVE STRENGTH OF 3000 PSI BEFORE ADDITIONAL CONCRETE IS CAST IN THE UNIT.
- 5. FOR INTERMEDIATE DIAPHRAGM DETAILS, SEE "INTERMEDIATE STEEL DIAPHRAGM DETAILS FOR PRESTRESSED CONCRETE MODIFIED BULB TEE GIRDERS" SHEET.
- 6. FOR END DIAPHRAGM AND CONTINUOUS DIAPHRAGM SECTIONS, SEE CORRESPONDING "SUPERSTRUCTURE DETAILS" SHEET.
- 7. FOR BARRIER RAIL DETAILS, SEE "CONCRETE BARRIER RAIL" SHEETS.
- 8. FOR "B" BAR MARKS AND LOCATIONS, SEE CORRESPONDING "PLAN OF SPANS" SHEET.
- 9. HEIGHT OF BEAM BOLSTER & CONTINUOUS HIGH CHAIR IS CALCULATED @ @ BENT. CONTRACTOR SHALL ADJUST HEIGHTS, AS NECESSARY TO MAINTAIN PROPER CLEARANCE, DUE TO GIRDER CAMBER.

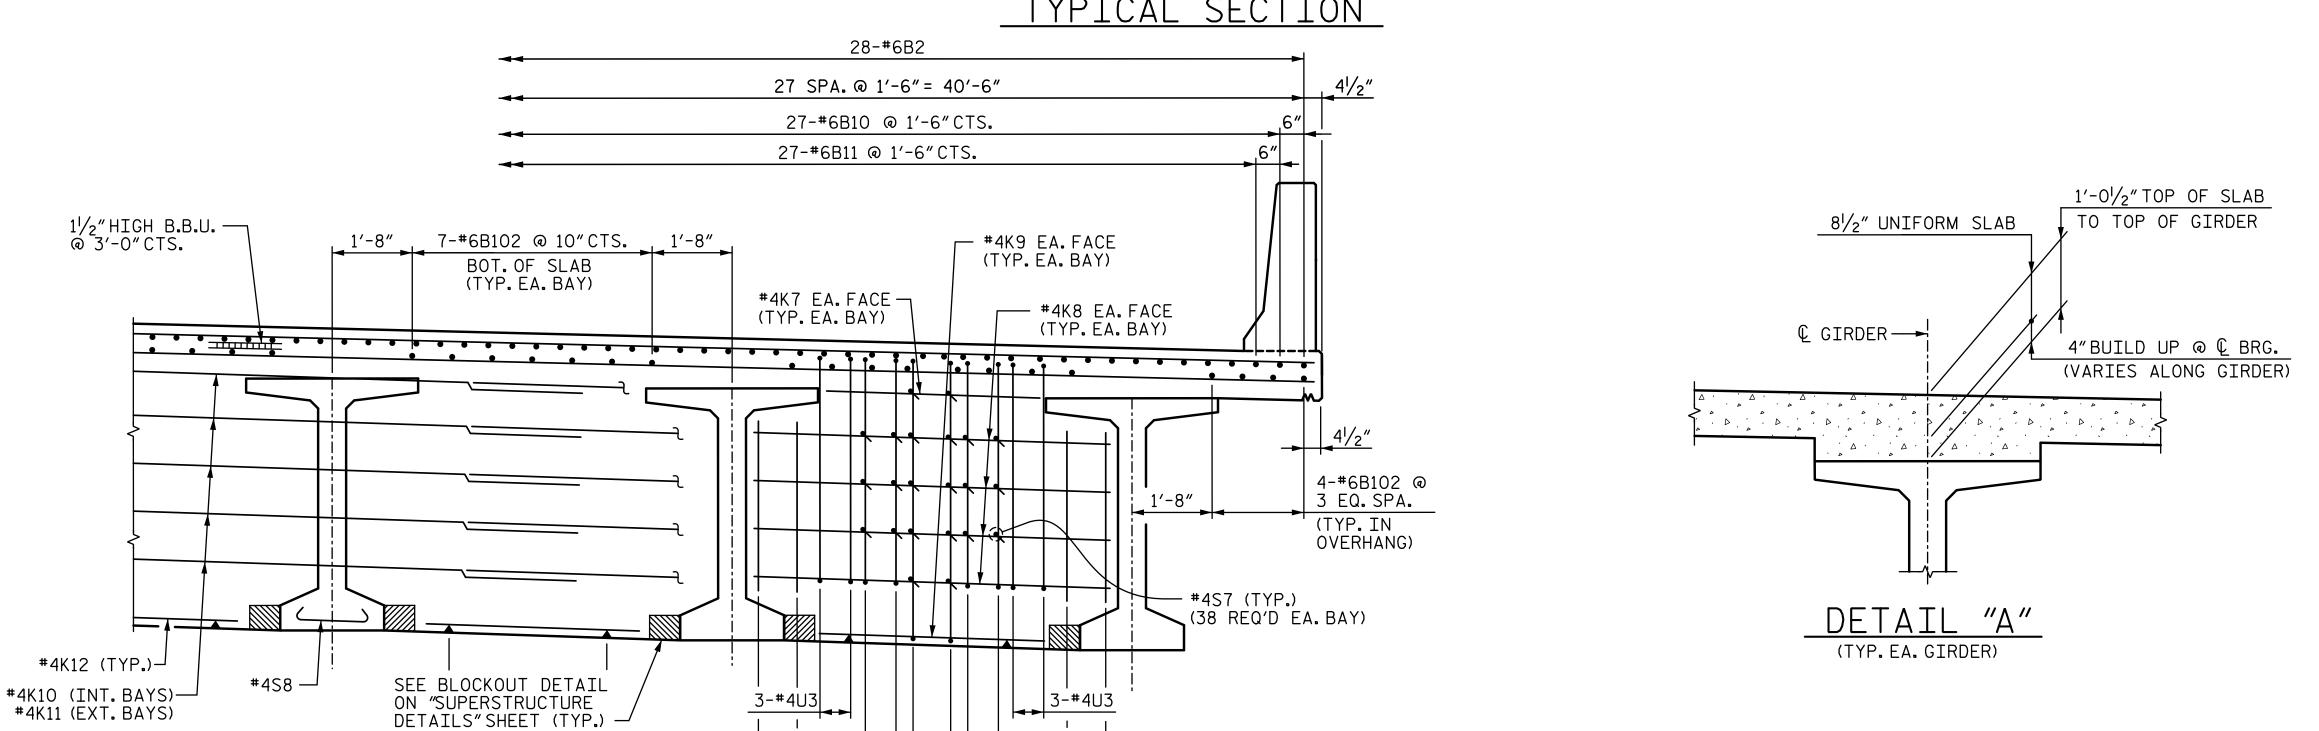

PROJECT NO. R-2514D

JONES & CRAVEN

STATION: 526+71.12 -L-= 16+08.07 - Y6-

> STATE OF NORTH CAROLINA DEPARTMENT OF TRANSPORTATION

COUNTY

SUPERSTRUCTURE

TYPICAL SECTION SPANS A - C

-RIGHT LANE-

3/10/2015 **REVISIONS** SHEET NO. S12-5 STV/Ralph Whitehead Associates, Inc. DATE: DATE: BY: NO. BY: 900 West Trade Street, Suite 715 Charlotte, NC 28202 TOTAL SHEETS 38 NC License Number F-0991

Adam J. Peter

-E3F6AF8D9B4742A..

SEAL 35695

DRAWN BY : ATH 6-14 DATE: CHECKED BY : AJP 5-14 \_ DATE : \_\_\_

DESIGN ENGINEER OF RECORD: A. PETER DATE : \_\_\_\_6-14

2"HIGH B.B.

@ 4'-0"CTS.

(TYP. EA. BAY)

CONTINUOUS DIAPHRAGM

4-#4K6

3-#4U2

3-#4U2

4-#4K6

4-#4U1

#4K6, #4U1, #4U2 & #4U3 @ 1'-0"CTS.

ALONG SKEW (TYP.EA.BAY)