

STATE	STATE PROJECT REFERENCE NO.	SHEET NO.	TOTAL SHEETS
N.C.	R-2514D	1	8

STATE OF NORTH CAROLINA
DEPARTMENT OF TRANSPORTATION
DIVISION OF HIGHWAYS
GEOTECHNICAL ENGINEERING UNIT

STRUCTURE
SUBSURFACE INVESTIGATION

PROJ. REFERENCE NO. 34442.1.5 (R-2514D) F.A. PROJ. NHF-17(7)
COUNTY JONES / CRAVEN
PROJECT DESCRIPTION US 17 FROM SOUTH OF NC 58 TO THE
NEW BERN BYPASS
SITE DESCRIPTION BRIDGE NO. 259 ON US 17 OVER DEEP GULLY
AT -L- STA. 625 + 23.29

CONTENTS

<u>SHEET</u>	<u>DESCRIPTION</u>
1	TITLE SHEET
2	LEGEND
3	SITE PLAN
4	PROFILE
5-7	BORE LOGS
8	SOIL TEST RESULTS

CAUTION NOTICE

THE SUBSURFACE INFORMATION AND THE SUBSURFACE INVESTIGATION ON WHICH IT IS BASED WERE MADE FOR THE PURPOSE OF STUDY, PLANNING, AND DESIGN, AND NOT FOR CONSTRUCTION OR PAY PURPOSES. THE VARIOUS FIELD BORING LOGS, ROCK CORES, AND SOIL TEST DATA AVAILABLE MAY BE REVIEWED OR INSPECTED IN RALEIGH BY CONTACTING THE N. C. DEPARTMENT OF TRANSPORTATION, GEOTECHNICAL ENGINEERING UNIT AT (919) 707-6850. NEITHER THE SUBSURFACE PLANS AND REPORTS, NOR THE FIELD BORING LOGS, ROCK CORES, OR SOIL TEST DATA ARE PART OF THE CONTRACT.

GENERAL SOIL AND ROCK STRATA DESCRIPTIONS AND INDICATED BOUNDARIES ARE BASED ON A GEOTECHNICAL INTERPRETATION OF ALL AVAILABLE SUBSURFACE DATA AND MAY NOT NECESSARILY REFLECT THE ACTUAL SUBSURFACE CONDITIONS BETWEEN BORINGS OR BETWEEN SAMPLED STRATA WITHIN THE BOREHOLE. THE LABORATORY SAMPLE DATA AND THE IN SITU W-PLACE TEST DATA CAN BE RELIED ON ONLY TO THE DEGREE OF RELIABILITY INHERENT IN THE STANDARD TEST METHOD. THE OBSERVED WATER LEVELS OR SOIL MOISTURE CONDITIONS INDICATED IN THE SUBSURFACE INVESTIGATIONS ARE AS RECORDED AT THE TIME OF THE INVESTIGATION. THESE WATER LEVELS OR SOIL MOISTURE CONDITIONS MAY VARY CONSIDERABLY WITH TIME ACCORDING TO CLIMATIC CONDITIONS INCLUDING TEMPERATURES, PRECIPITATION, AND WIND, AS WELL AS OTHER NON-CLIMATIC FACTORS.


THE BIDDER OR CONTRACTOR IS CAUTIONED THAT DETAILS SHOWN ON THE SUBSURFACE PLANS ARE PRELIMINARY ONLY AND IN MANY CASES THE FINAL DESIGN DETAILS ARE DIFFERENT. FOR BIDDING AND CONSTRUCTION PURPOSES, REFER TO THE CONSTRUCTION PLANS AND DOCUMENTS FOR FINAL DESIGN INFORMATION ON THIS PROJECT. THE DEPARTMENT DOES NOT WARRANT OR GUARANTEE THE SUFFICIENCY OR ACCURACY OF THE INVESTIGATION MADE, NOR THE INTERPRETATIONS MADE, OR OPINION OF THE DEPARTMENT AS TO THE TYPE OF MATERIALS AND CONDITIONS TO BE ENCOUNTERED. THE BIDDER OR CONTRACTOR IS CAUTIONED TO MAKE SUCH INDEPENDENT SUBSURFACE INVESTIGATIONS AS HE DEEMS NECESSARY TO SATISFY HIMSELF AS TO CONDITIONS TO BE ENCOUNTERED ON THIS PROJECT. THE CONTRACTOR SHALL HAVE NO CLAIM FOR ADDITIONAL COMPENSATION OR FOR AN EXTENSION OF TIME FOR ANY REASON RESULTING FROM THE ACTUAL CONDITIONS ENCOUNTERED AT THE SITE DIFFERING FROM THOSE INDICATED IN THE SUBSURFACE INFORMATION.

PROJECT: 34442.1.5 ID: R-2514D

PERSONNEL

J.R. SWARTLEY
S&ME PERSONNEL

INVESTIGATED BY T.C. BOTTOMS
CHECKED BY D.N. ARGENBRIGHT
SUBMITTED BY D.N. ARGENBRIGHT
DATE NOVEMBER 2013


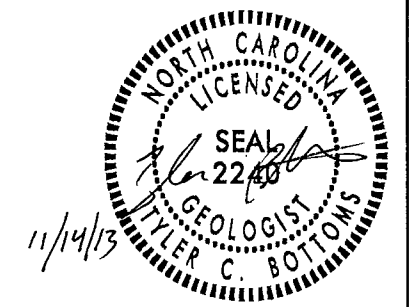


DRAWN BY: C.P. TURNER

NOTE - THE INFORMATION CONTAINED HEREIN IS NOT IMPLIED OR GUARANTEED BY THE N. C. DEPARTMENT OF TRANSPORTATION AS BEING ACCURATE NOR IT IS CONSIDERED TO BE PART OF THE PLANS, SPECIFICATIONS, OR CONTRACT FOR THE PROJECT.

NOTE - BY HAVING REQUESTED THIS INFORMATION THE CONTRACTOR SPECIFICALLY WAIVES ANY CLAIMS FOR INCREASED COMPENSATION OR EXTENSION OF TIME BASED ON DIFFERENCES BETWEEN THE CONDITIONS INDICATED HEREIN AND THE ACTUAL CONDITIONS AT THE PROJECT SITE.

SKEW = 105°

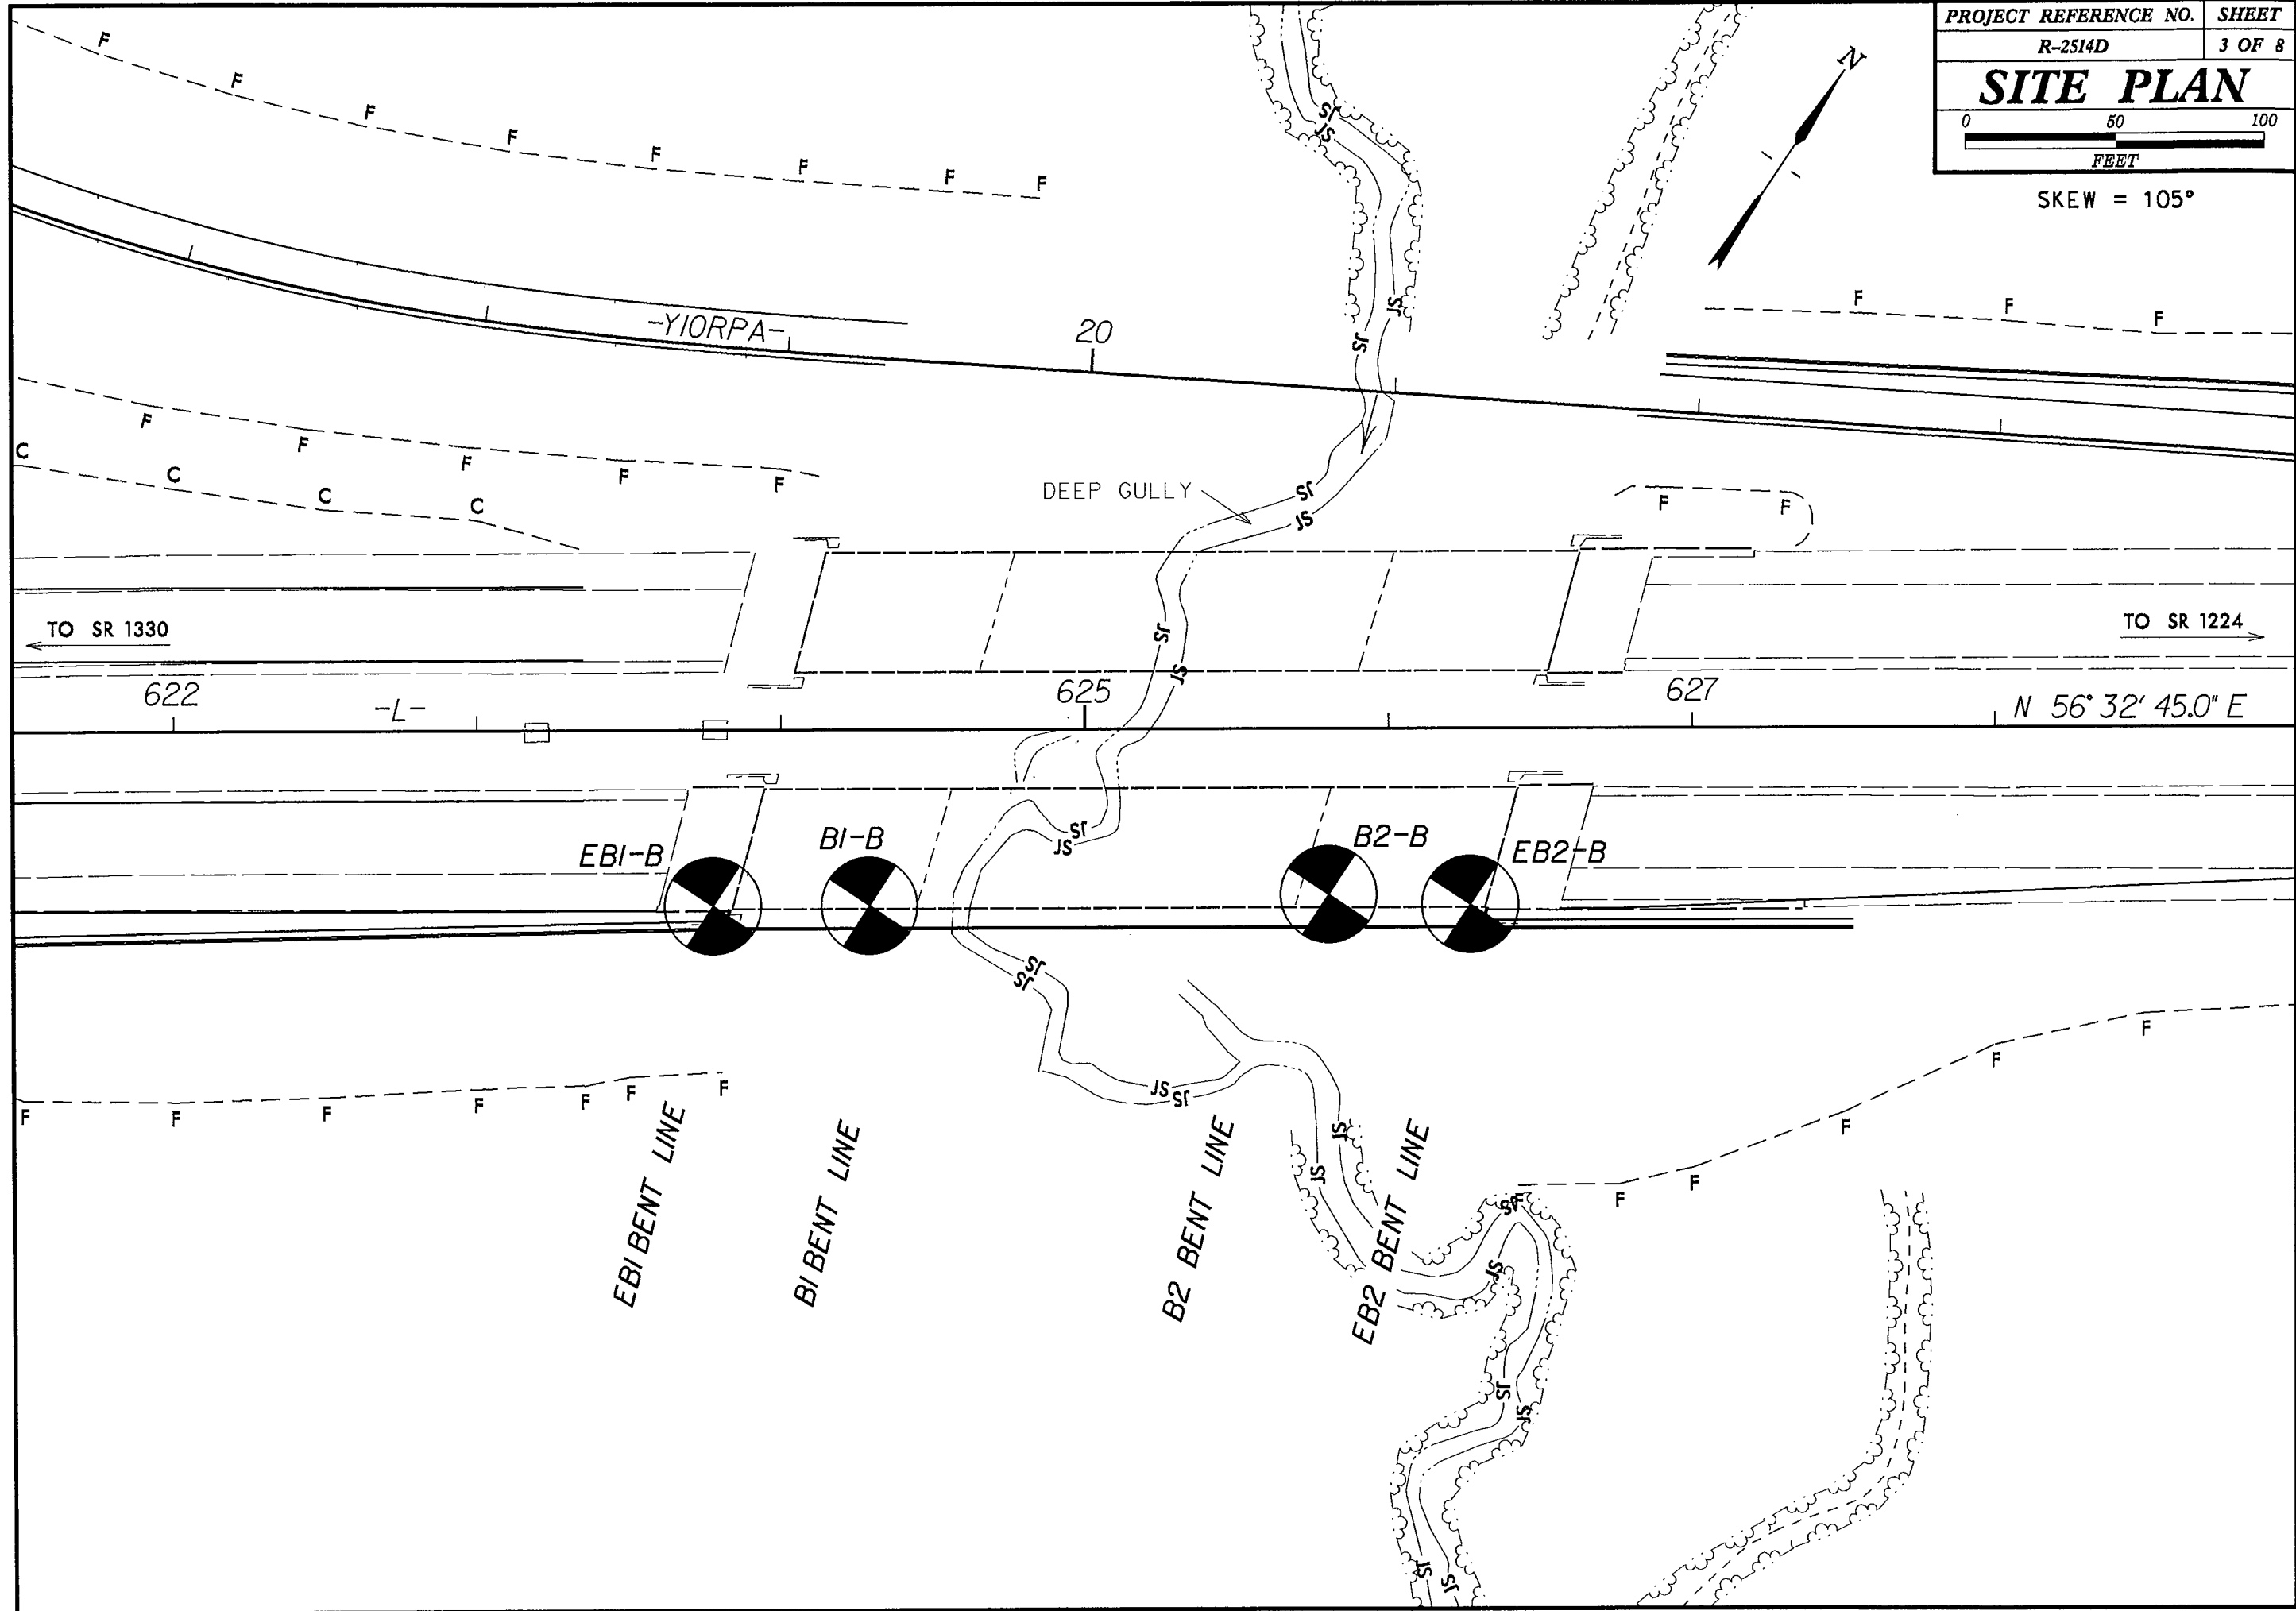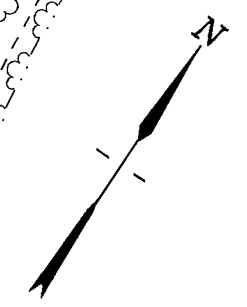

TO SR 1330

TO SR 1224

N 56° 32' 45.0" E

-YIORPA-

DEEP GULLY

622

625

627

EBI-B

BI-B

B2-B

EB2-B

EBI BENT LINE


BI BENT LINE

B2 BENT LINE

EB2 BENT LINE

PROFILE THROUGH BORINGS PROJECTED ALONG -L-

VE = 2.0 90

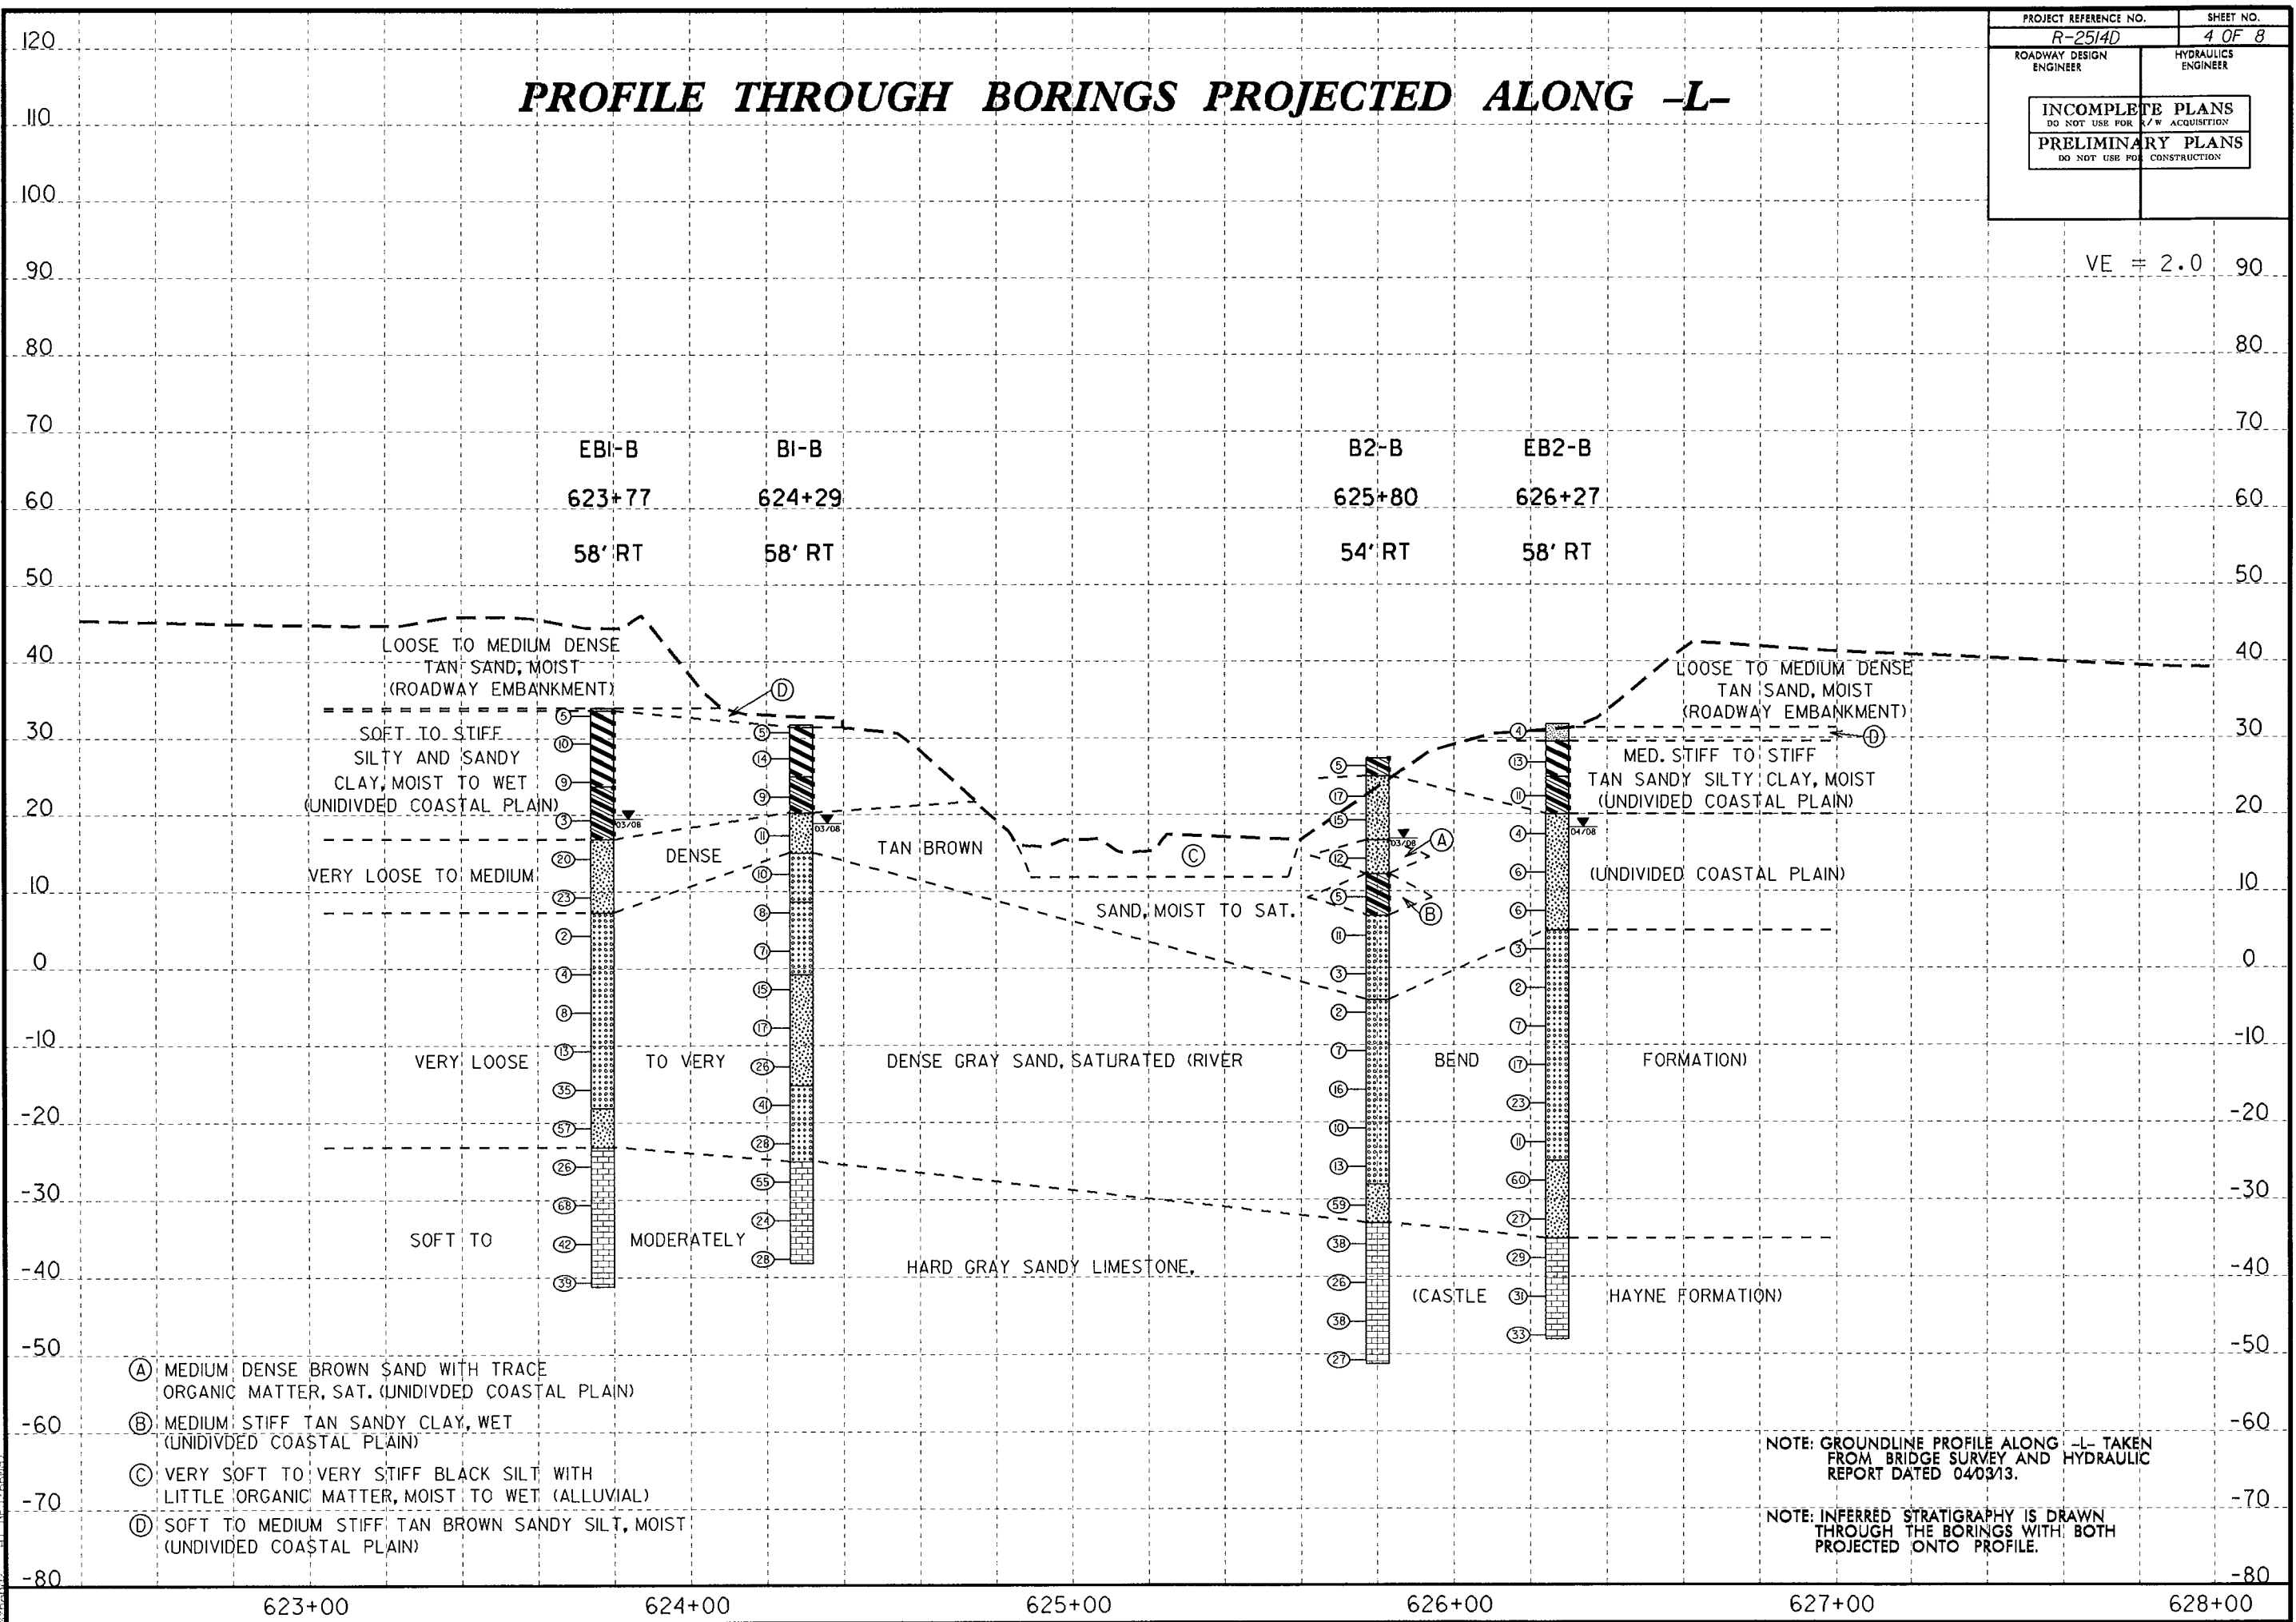

25-JUN-2014 10:36
 S:\Transfer\2014\Projects\2514D\GEO\BRDG.L\625+23\CADD_GEO\TECH\51\tee\Sub\VR2514D_GEO_BRDG_WIDENING_PFL (2).dgn
 5/14/13

R-2514D
BRIDGE NO. 259 ON -L- (US 17 BYPASS) OVER DEEP GULLY

HOLE #	SAMPLE #	PASS #10	PASS #40	PASS #200	CSESAND	FINESAND	SI	CL	LL	PI	CLASS	DEPTH	MOIST. ORG.
EB1-B	SS-9	100	100	88	1.6	17.2	51.0	30.3	24	5	A-4(3)	0.0-1.5	
	SS-10	97	96	85	2.0	14.9	24.5	58.5	43	20	A-7-6(18)	3.6-5.1	
	SS-11	100	97	16	11.8	74.4	2.7	11.1	17	NP	A-2-4(0)	18.6-20.1	
	SS-12	100	98	5	32.1	63.5	1.4	3.0	14	NP	A-3(0)	28.6-30.1	
	SS-13	100	98	6	5.9	90.2	0.9	3.0	25	NP	A-3(0)	38.6-40.1	
	SS-14	100	98	13	6.5	83.8	4.7	5.0	24	NP	A-2-4(0)	53.6-55.1	
	SS-15	99	89	25	13.9	64.8	11.2	10.1	17	NP	A-2-4(0)	58.6-60.1	
	SS-16	46	26	14	53.9	28.1	10.0	8.1	16	NP	A-1-a(0)	68.6-70.1	
B1-B	SS-17	92	92	78	1.4	19.2	24.9	54.5	49	26	A-7-6(21)	3.4-4.9	
	SS-18	99	97	52	8.1	42.2	11.4	38.3	32	16	A-6(5)	8.4-9.9	
	SS-19	99	86	24	31.1	46.6	4.1	18.2	20	3	A-2-4(0)	13.4-14.9	
	SS-20	99	88	5	51.2	44.7	1.1	3.0	13	NP	A-3(0)	18.4-19.9	
	SS-21	100	88	9	31.0	61.6	3.4	4.0	15	NP	A-3(0)	28.4-29.9	
	SS-22	100	100	21	1.2	80.5	10.2	8.1	20	NP	A-2-4(0)	33.4-34.9	
	SS-23	100	100	10	2.7	89.2	4.0	4.0	21	NP	A-3(0)	48.4-49.9	
	SS-24	93	71	15	30.0	55.4	8.6	6.1	18	NP	A-2-4(0)	63.4-64.9	
B2-B	SS-51	100	88	35	30.3	36.6	2.8	30.3	25	10	A-2-4(0)	4.0-5.5	
	SS-52	100	93	31	28.9	41.4	1.4	28.3	21	5	A-2-4(0)	7.1-8.6	
	SS-53	100	85	14	45.1	41.7	2.1	11.1	22	NP	A-2-4(0)	12.1-13.6	3.0
	SS-54	99	91	43	16.6	43.6	5.5	34.3	29	12	A-6(2)	17.1-18.6	
	SS-55	100	97	7	31.8	61.1	3.0	4.0	18	NP	A-3(0)	22.1-23.6	
	SS-56	100	99	4	3.1	93.7	0.1	3.0	21	NP	A-3(0)	42.1-43.6	
	SS-57	100	97	14	6.5	82.0	2.4	9.1	19	NP	A-2-4(0)	57.1-58.6	
EB2-B	SS-58	100	99	86	3.6	15.6	40.4	40.4	25	6	A-4(4)	0.0-1.5	
	SS-59	100	99	83	2.0	18.2	13.1	66.7	62	39	A-7-6(35)	4.0-5.5	28.4
	SS-60	100	95	37	29.9	34.3	3.4	32.3	27	12	A-6(1)	8.4-9.9	
	SS-61	100	78	15	41.6	42.8	1.4	14.1	18	NP	A-2-4(0)	18.4-19.9	
	SS-62	100	96	6	18.7	75.6	2.7	3.0	15	NP	A-3(0)	28.4-29.9	
	SS-63	100	98	5	4.2	92.5	0.2	3.0	23	NP	A-3(0)	43.4-44.9	
	SS-64	98	89	20	13.5	70.1	4.2	12.1	16	NP	A-2-4(0)	58.4-59.9	
	SS-65	85	40	16	62.0	22.2	1.6	14.1	25	NP	A-1-b(0)	68.4-69.9	
	SS-66	84	43	17	57.6	25.1	5.3	12.1	20	NP	A-1-b(0)	78.4-79.9	