


TIP NO. R-2413CA	SHEET NO. SIGN-2
APPROVED: <u>Charles A. Johnson, III</u> <small>DocuSigned by: Charles A. Johnson, III 504150284775446</small>	
DATE: 2/11/2015	
SEAL	
	

TYPE 'A' AND 'B' GROUND MOUNTED SIGNS



SIGN NO.	SIGN TYPE	SIGN SIZE (in.)			ROADWAY STATION	NO. OF SUP.	BEAM SECTION	SUPPORT TYPE BA or S	ATTACH METHOD	MOUNTING METHOD	HORIZ. CLR.* (ft.)	LENGTH (ft)			LEFT SUPPORT (ft)			CENTER SUPPORT (ft)			RIGHT SUPPORT (ft)			FOOTING DIAMETER (ft.)	FOOTING DEPTH (ft.)	B/A SUPPORT WEIGHTS (lbs.)	SIMPLE SUPPORT WEIGHTS (lbs.)	REINF. FTGS. (c.y.)	PLAIN FTGS. (c.y.)	FIELD VERIFIED SEE NOTE 2 (mm/dd/yy)																						
		w	x	h								SNS HT H	MTG HT C	EMBED MENT	S	L	TOTAL LENGTH	S	L	TOTAL LENGTH	S	L	TOTAL LENGTH																													
Future 101	B A	132 144	X X	30 96	-LREV_END- 100+00	2	W6x12	BA	N/A	N/A	30.00	8.00	7.00	5.5	3.18	18.18	23.68	0.00	0.00	0.00	0.91	15.91	21.41	1.50	6	619.08	0.00	0.79	0.00																							
102	B	96	X	48	-LREV_END- 104+65	2	S3x5.7	BA	N/A	N/A	30.00	4.00	7.00	3.5	2.77	13.77	17.27	0.00	0.00	0.00	1.24	12.24	15.74	1.00	4	224.16	0.00	0.00	0.23																							
Future 103	B A	132 144	X X	30 96	US-220 SB	2	W6x12	BA	N/A	N/A	30.00	8.00	7.00	5.5	2.15	17.15	22.65	0.00	0.00	0.00	0.05	15.05	20.55	1.50	6	596.40	0.00	0.79	0.00																							
201	A	72	X	60	-LREV_SB- 91+85 +/-	2	S3x5.7	BA	N/A	N/A	△	5.00	7.00	3.5	0.50	12.50	16.00	0.00	0.00	0.00	0.50	12.50	16.00	1	4	218.40	0.00	0.00	0.23																							
901	A	114	X	96	-LREV- 83+00	2	W6x16	BA	N/A	N/A	30.00	8.00	7.00	RELOCATE EXISTING SIGN TO EXISTING STEEL SUPPORTS																																						
																							TOTAL																													
																							1658.04																													
																							USE:																													
																							1659																													

NOTES:

DIMENSION "S" REPRESENTS AN INCREASE (+), OR A DECREASE (-) IN POLE LENGTH, RELATIVE TO THE ELEVATION OF THE EDGE OF PAVEMENT.

FIELD VERIFICATIONS SHALL BE REQUIRED FOR ALL SUPPORTS, SEE (*) ARTICLE 903-3. FABRICATORS SHALL BE AISC CERTIFIED IN CATEGORY 1, SEE (*) ARTICLE 1072-1. (*) = N.C.D.O.T. STANDARD SPECIFICATIONS FOR ROADS AND STRUCTURES

PLAN LOCATIONS FOR EXISTING UTILITIES ARE BASED ON THE BEST AVAILABLE INFORMATION AND, THEREFORE MAY NOT BE PRECISELY ACCURATE. THEREFORE, IT IS INCUMBENT UPON THE CONTRACTOR TO DETERMINE THE EXACT LOCATION OF UTILITIES BEFORE BEGINNING WORK IN A LOCATION.

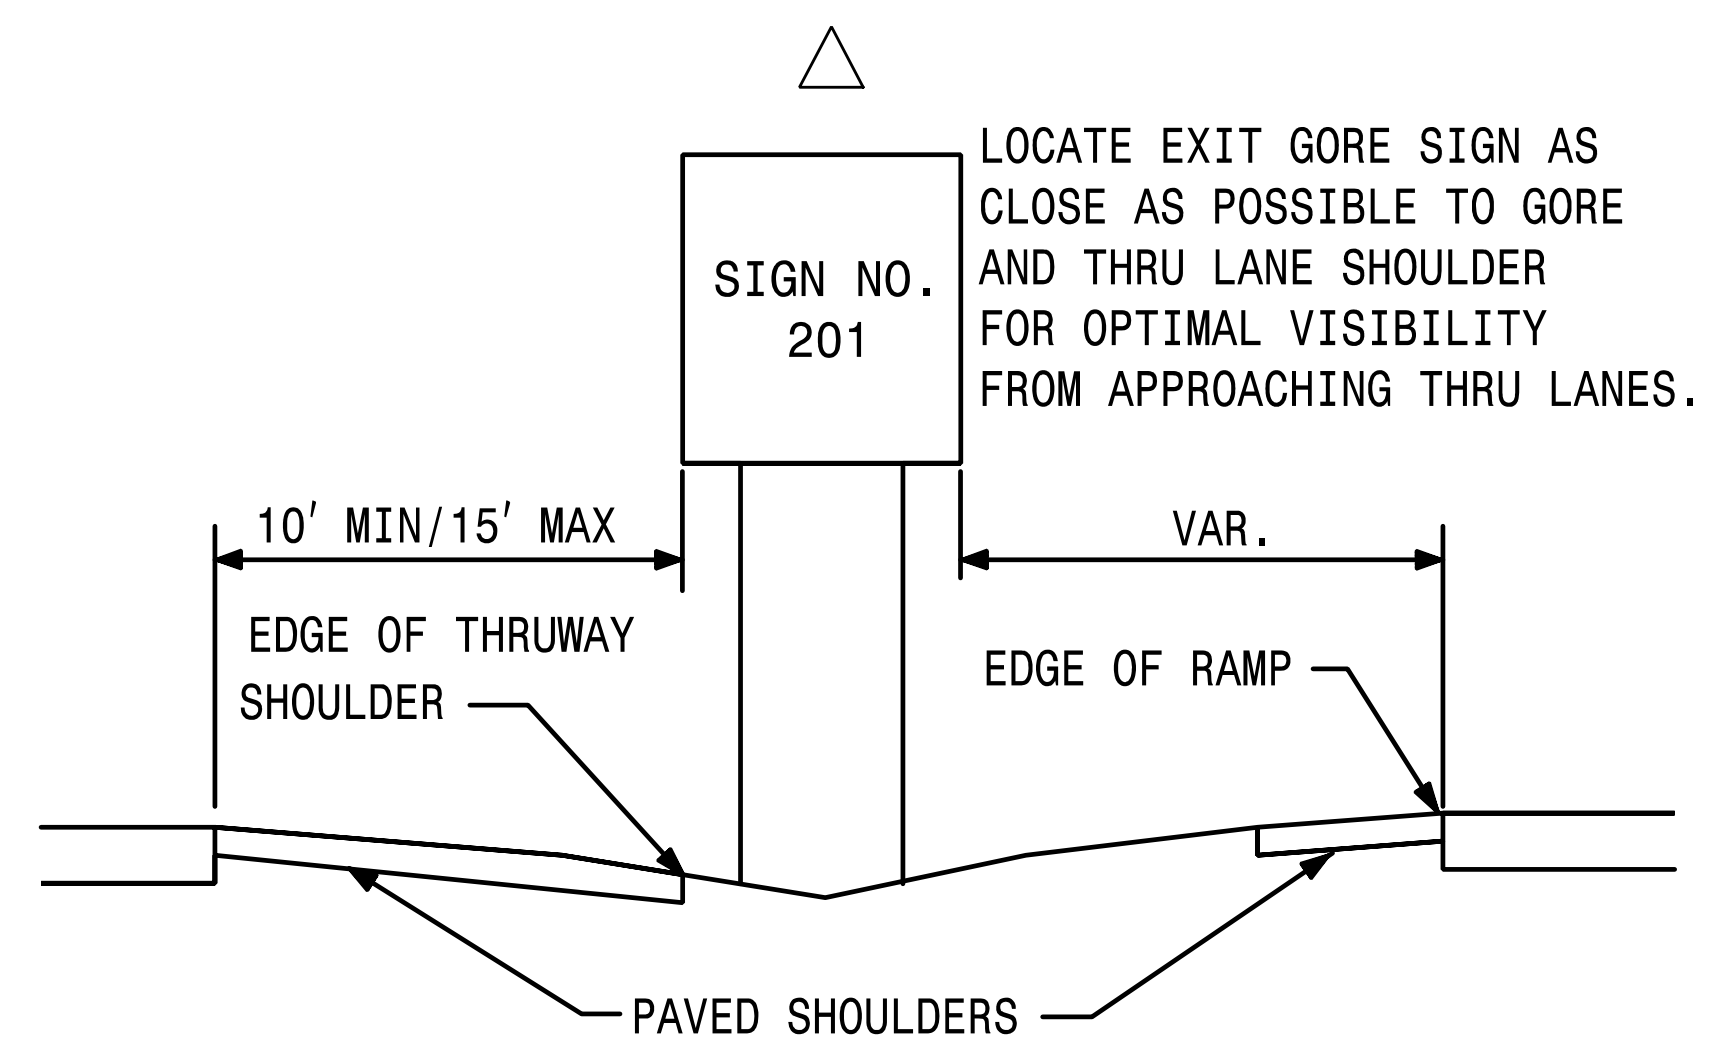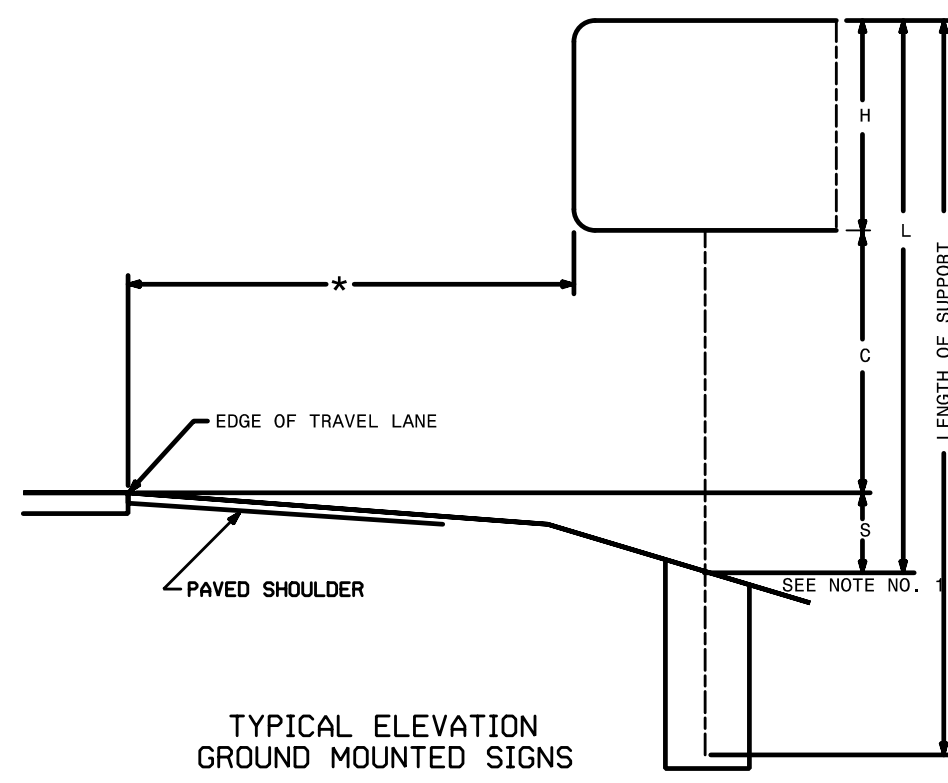

TYPE 'A' AND TYPE 'B' GROUND MOUNTED SIGNS