

STATE OF NORTH CAROLINA
 DEPARTMENT OF TRANSPORTATION
 DIVISION OF HIGHWAYS
 GEOTECHNICAL ENGINEERING UNIT

STRUCTURE
SUBSURFACE INVESTIGATION

CONTENTS

SHEET	DESCRIPTION
1	TITLE SHEET
2	LEGEND
3	SITE PLAN
4	PROFILE
5-8	CROSS SECTION
9-19	BORE LOG & CORE REPORTS & CORE PHOTOGRAPHS
20	ROCK CORE TEST RESULTS
21	SITE PHOTOGRAPHS

PROJ. REFERENCE NO. 42180.1.1 (B-5105) F.A. PROJ. BRSTP-4982 (7)
 COUNTY MECKLENBURG
 PROJECT DESCRIPTION BRIDGE NO. 49 OVER LITTLE SUGAR CREEK ON SR 4982 (LANCASTER HIGHWAY)

CAUTION NOTICE

THE SUBSURFACE INFORMATION AND THE SUBSURFACE INVESTIGATION ON WHICH IT IS BASED WERE MADE FOR THE PURPOSE OF STUDY, PLANNING, AND DESIGN, AND NOT FOR CONSTRUCTION OR PAY PURPOSES. THE VARIOUS FIELD BORING LOGS, ROCK CORES, AND SOIL TEST DATA AVAILABLE MAY BE REVIEWED OR INSPECTED IN RALEIGH BY CONTACTING THE N. C. DEPARTMENT OF TRANSPORTATION, GEOTECHNICAL ENGINEERING UNIT AT 1991 TOL-8650. NEITHER THE SUBSURFACE PLANS AND REPORTS, NOR THE FIELD BORING LOGS, ROCK CORES, OR SOIL TEST DATA ARE PART OF THE CONTRACT.

GENERAL SOIL AND ROCK STRATA DESCRIPTIONS AND INDICATED BOUNDARIES ARE BASED ON A GEOTECHNICAL INTERPRETATION OF ALL AVAILABLE SUBSURFACE DATA AND MAY NOT NECESSARILY REFLECT THE ACTUAL SUBSURFACE CONDITIONS BETWEEN BORINGS OR BETWEEN SAMPLED STRATA WITHIN THE BOREHOLE. THE LABORATORY SAMPLE DATA AND THE IN SITU (IN-PLACE) TEST DATA CAN BE RELIED ON ONLY TO THE DEGREE OF RELIABILITY INHERENT IN THE STANDARD TEST METHOD. THE OBSERVED WATER LEVELS OR SOIL MOISTURE CONDITIONS INDICATED IN THE SUBSURFACE INVESTIGATIONS ARE AS RECORDED AT THE TIME OF THE INVESTIGATION. THESE WATER LEVELS OR SOIL MOISTURE CONDITIONS MAY VARY CONSIDERABLY WITH TIME ACCORDING TO CLIMATIC CONDITIONS INCLUDING TEMPERATURES, PRECIPITATION, AND WIND, AS WELL AS OTHER NON-CLIMATIC FACTORS.

THE BIDDER OR CONTRACTOR IS CAUTIONED THAT DETAILS SHOWN ON THE SUBSURFACE PLANS ARE PRELIMINARY ONLY AND IN MANY CASES THE FINAL DESIGN DETAILS ARE DIFFERENT. FOR BIDDING AND CONSTRUCTION PURPOSES, REFER TO THE CONSTRUCTION PLANS AND DOCUMENTS FOR FINAL DESIGN INFORMATION ON THIS PROJECT. THE DEPARTMENT DOES NOT WARRANT OR GUARANTEE THE SUFFICIENCY OR ACCURACY OF THE INVESTIGATION MADE, NOR THE INTERPRETATIONS MADE, OR OPINION OF THE DEPARTMENT AS TO THE TYPE OF MATERIALS AND CONDITIONS TO BE ENCOUNTERED. THE BIDDER OR CONTRACTOR IS CAUTIONED TO MAKE SUCH INDEPENDENT SUBSURFACE INVESTIGATIONS AS HE DEEMS NECESSARY TO SATISFY HIMSELF AS TO CONDITIONS TO BE ENCOUNTERED ON THIS PROJECT. THE CONTRACTOR SHALL HAVE NO CLAIM FOR ADDITIONAL COMPENSATION OR FOR AN EXTENSION OF TIME FOR ANY REASON RESULTING FROM THE ACTUAL CONDITIONS ENCOUNTERED AT THE SITE DIFFERING FROM THOSE INDICATED IN THE SUBSURFACE INFORMATION.

PERSONNEL

W. FELDER

J. WHITE

R. MONTGOMERY

INVESTIGATED BY D. GOODNIGHT

CHECKED BY X. BARRETT

SUBMITTED BY KLEINFELDER

DATE JANUARY 2014



PROJECT: 42180.1.1 ID: B-5105

DRAWN BY: W. FELDER

NOTE - THE INFORMATION CONTAINED HEREIN IS NOT IMPLIED OR GUARANTEED BY THE N. C. DEPARTMENT OF TRANSPORTATION AS BEING ACCURATE NOR IT IS CONSIDERED TO BE PART OF THE PLANS, SPECIFICATIONS, OR CONTRACT FOR THE PROJECT.


NOTE - BY HAVING REQUESTED THIS INFORMATION THE CONTRACTOR SPECIFICALLY WAIVES ANY CLAIMS FOR INCREASED COMPENSATION OR EXTENSION OF TIME BASED ON DIFFERENCES BETWEEN THE CONDITIONS INDICATED HEREIN AND THE ACTUAL CONDITIONS AT THE PROJECT SITE.



NORTH CAROLINA DEPARTMENT OF TRANSPORTATION
DIVISION OF HIGHWAYS
GEOTECHNICAL ENGINEERING UNIT

SUBSURFACE INVESTIGATION

SOIL AND ROCK LEGEND, TERMS, SYMBOLS, AND ABBREVIATIONS

SOIL DESCRIPTION	GRADATION	ROCK DESCRIPTION	TERMS AND DEFINITIONS
SOIL IS CONSIDERED TO BE THE UNCONSOLIDATED, SEMI-CONSOLIDATED, OR WEATHERED EARTH MATERIALS THAT CAN BE PENETRATED WITH A CONTINUOUS FLIGHT POWER AUGER, AND YIELD LESS THAN 100 BLOWS PER FOOT ACCORDING TO STANDARD PENETRATION TEST (AASHTO T206, ASTM D-1586). SOIL CLASSIFICATION IS BASED ON THE AASHTO SYSTEM. BASIC DESCRIPTIONS GENERALLY SHALL INCLUDE: CONSISTENCY, COLOR, TEXTURE, MOISTURE, AASHTO CLASSIFICATION, AND OTHER PERTINENT FACTORS SUCH AS MINERALOGICAL COMPOSITION, ANGULARITY, STRUCTURE, PLASTICITY, ETC. EXAMPLE: <i>VERY STIFF, GRAY SILTY CLAY, MOST WITH INTERBEDDED FINE SAND LAYERS, HIGHLY PLASTIC, A-7-6</i>	WELL GRADED - INDICATES A GOOD REPRESENTATION OF PARTICLE SIZES FROM FINE TO COARSE. UNIFORM - INDICATES THAT SOIL PARTICLES ARE ALL APPROXIMATELY THE SAME SIZE. (ALSO POORLY GRADED) GAP-GRADED - INDICATES A MIXTURE OF UNIFORM PARTICLES OF TWO OR MORE SIZES. ANGULARITY OF GRAINS THE ANGULARITY OR ROUNDNESS OF SOIL GRAINS IS DESIGNATED BY THE TERMS: <u>ANGULAR</u> , <u>SUBANGULAR</u> , <u>SUBROUNDED</u> , OR <u>ROUNDED</u> .	HARD ROCK IS NON-COASTAL PLAIN MATERIAL THAT IF TESTED, WOULD YIELD SPT REFUSAL, AN INFERRED ROCK LINE INDICATES THE LEVEL AT WHICH NON-COASTAL PLAIN MATERIAL WOULD YIELD SPT REFUSAL. SPT REFUSAL IS PENETRATION BY A SPLIT SPOON SAMPLER EQUAL TO OR LESS THAN 0.1 FOOT PER 60 BLOWS. IN NON-COASTAL PLAIN MATERIAL, THE TRANSITION BETWEEN SOIL AND ROCK IS OFTEN REPRESENTED BY A ZONE OF WEATHERED ROCK. ROCK MATERIALS ARE TYPICALLY DIVIDED AS FOLLOWS: WEATHERED ROCK (WR) CRYSTALLINE ROCK (CR) NON-CRYSTALLINE ROCK (NCR) COASTAL PLAIN SEDIMENTARY ROCK (CP)	ALLUVIUM (ALLUV.) - SOILS THAT HAVE BEEN TRANSPORTED BY WATER. AQUIFER - A WATER BEARING FORMATION OR STRATA. ARENACEOUS - APPLIED TO ROCKS THAT HAVE BEEN DERIVED FROM SAND OR THAT CONTAIN SAND. ARGILLACEOUS - APPLIED TO ALL ROCKS OR SUBSTANCES COMPOSED OF CLAY MINERALS, OR HAVING A NOTABLE PROPORTION OF CLAY IN THEIR COMPOSITION, AS SHALE, SLATE, ETC. ARTESIAN - GROUND WATER THAT IS UNDER SUFFICIENT PRESSURE TO RISE ABOVE THE LEVEL AT WHICH IT IS ENCOUNTERED, BUT WHICH DOES NOT NECESSARILY RISE TO OR ABOVE THE GROUND SURFACE. CALCAREOUS (CALC.) - SOILS THAT CONTAIN APPRECIABLE AMOUNTS OF CALCIUM CARBONATE. COLLUVIUM - ROCK FRAGMENTS MIXED WITH SOIL DEPOSITED BY GRAVITY ON SLOPE OR AT BOTTOM OF SLOPE. CORE RECOVERY (REC.) - TOTAL LENGTH OF ALL MATERIAL RECOVERED IN THE CORE BARREL DIVIDED BY TOTAL LENGTH OF CORE RUN AND EXPRESSED AS A PERCENTAGE. DIKE - A TABULAR BODY OF IGNEOUS ROCK THAT CUTS ACROSS THE STRUCTURE OF ADJACENT ROCKS OR CUTS MASSIVE ROCK. DIP - THE ANGLE AT WHICH A STRATUM OR ANY PLANAR FEATURE IS INCLINED FROM THE HORIZONTAL. DIP DIRECTION (DIP AZIMUTH) - THE DIRECTION OR BEARING OF THE HORIZONTAL TRACE OF THE LINE OF DIP, MEASURED CLOCKWISE FROM NORTH. FAULT - A FRACTURE OR FRACTURE ZONE ALONG WHICH THERE HAS BEEN DISPLACEMENT OF THE SIDES RELATIVE TO ONE ANOTHER PARALLEL TO THE FRACTURE. FISSILE - A PROPERTY OF SPLITTING ALONG CLOSELY SPACED PARALLEL PLANES. FLOAT - ROCK FRAGMENTS ON SURFACE NEAR THEIR ORIGINAL POSITION AND DISLOGGED FROM PARENT MATERIAL. FLOOD PLAIN (FP) - LAND BORDERING A STREAM, BUILT OF SEDIMENTS DEPOSITED BY THE STREAM. FORMATION (FM) - A MAPPABLE GEOLOGIC UNIT THAT CAN BE RECOGNIZED AND TRACED IN THE FIELD. JOINT - FRACTURE IN ROCK ALONG WHICH NO APPRECIABLE MOVEMENT HAS OCCURRED. LEDGE - A SHELF-LIKE RIDGE OR PROJECTION OF ROCK WHOSE THICKNESS IS SMALL COMPARED TO ITS LATERAL EXTENT. LENS - A BODY OF SOIL OR ROCK THAT THINS OUT IN ONE OR MORE DIRECTIONS. MOTTLED (MOTJ.) - IRREGULARLY MARKED WITH SPOTS OF DIFFERENT COLORS. MOTTLING IN SOILS USUALLY INDICATES POOR AERATION AND LACK OF GOOD DRAINAGE. PERCHED WATER - WATER MAINTAINED ABOVE THE NORMAL GROUND WATER LEVEL BY THE PRESENCE OF AN INTERVENING IMPERVIOUS STRATUM. RESIDUAL (RES.) SOIL - SOIL FORMED IN PLACE BY THE WEATHERING OF ROCK. ROCK QUALITY DESIGNATION (RQD) - A MEASURE OF ROCK QUALITY DESCRIBED BY TOTAL LENGTH OF ROCK SEGMENTS EQUAL TO OR GREATER THAN 4 INCHES DIVIDED BY THE TOTAL LENGTH OF CORE RUN AND EXPRESSED AS A PERCENTAGE. SAPROLITE (SAP.) - RESIDUAL SOIL THAT RETAINS THE RELIC STRUCTURE OR FABRIC OF THE PARENT ROCK. SILL - AN INTRUSIVE BODY OF IGNEOUS ROCK OF APPROXIMATELY UNIFORM THICKNESS AND RELATIVELY THIN COMPARED WITH ITS LATERAL EXTENT, THAT HAS BEEN EMPLACED PARALLEL TO THE BEDDING OR SCHISTOSITY OF THE INTRUDED ROCKS. SLICKENSIDE - POLISHED AND STRIATED SURFACE THAT RESULTS FROM FRICTION ALONG A FAULT OR SLIP PLANE. STANDARD PENETRATION TEST (PENETRATION RESISTANCE) (SPT) - NUMBER OF BLOWS (IN OR BPF) OF A 140 LB. HAMMER FALLING 30 INCHES REQUIRED TO PRODUCE A PENETRATION OF 1 FOOT INTO SOIL WITH A 2 INCH OUTSIDE DIAMETER SPLIT SPOON SAMPLER. SPT REFUSAL IS PENETRATION EQUAL TO OR LESS THAN 0.1 FOOT PER 60 BLOWS. STRATA CORE RECOVERY (SREC.) - TOTAL LENGTH OF STRATA MATERIAL RECOVERED DIVIDED BY TOTAL LENGTH OF STRATUM AND EXPRESSED AS A PERCENTAGE. STRATA ROCK QUALITY DESIGNATION (SRQD) - A MEASURE OF ROCK QUALITY DESCRIBED BY TOTAL LENGTH OF ROCK SEGMENTS WITHIN A STRATUM EQUAL TO OR GREATER THAN 4 INCHES DIVIDED BY THE TOTAL LENGTH OF STRATA AND EXPRESSED AS A PERCENTAGE. TOPSOIL (TS) - SURFACE SOILS USUALLY CONTAINING ORGANIC MATTER.
SOIL LEGEND AND AASHTO CLASSIFICATION GENERAL CLASS. GRANULAR MATERIALS (<= 35% PASSING #200) SILT-CLAY MATERIALS (> 35% PASSING #200) ORGANIC MATERIALS GROUP CLASS. A-1, A-3, A-2, A-4, A-5, A-6, A-7, A-1, A-2, A-3, A-4, A-5, A-6, A-7 SYMBOL % PASSING: 10, 40, 200 LIQUID LIMIT PLASTIC INDEX GROUP INDEX USUAL TYPES OF MAJOR MATERIALS GEN. RATING AS A SUBGRADE	MINERALOGICAL COMPOSITION MINERAL NAMES SUCH AS QUARTZ, FELDSPAR, MICA, TALC, KAOLIN, ETC. ARE USED IN DESCRIPTIONS WHENEVER THEY ARE CONSIDERED OF SIGNIFICANCE. COMPRESSIBILITY SLIGHTLY COMPRESSIBLE MODERATELY COMPRESSIBLE HIGHLY COMPRESSIBLE PERCENTAGE OF MATERIAL ORGANIC MATERIAL GRANULAR SOILS SILT-CLAY SOILS OTHER MATERIAL TRACE OF ORGANIC MATTER 2 - 3% 3 - 5% TRACE 1 - 10% LITTLE ORGANIC MATTER 3 - 5% 5 - 12% LITTLE 10 - 20% MODERATELY ORGANIC 5 - 10% 12 - 20% SOME 20 - 35% HIGHLY ORGANIC >10% >20% HIGHLY 35% AND ABOVE	WEATHERING FRESH ROCK FRESH, CRYSTALLINE BRIGHT, FEW JOINTS MAY SHOW SLIGHT STAINING, ROCK RINGS UNDER HAMMER IF CRYSTALLINE. VERY SLIGHT (V SLI.) ROCK GENERALLY FRESH, JOINTS STAINED, SOME JOINTS MAY SHOW THIN CLAY COATINGS IF OPEN, CRYSTALS ON A BROKEN SPECIMEN FACE SHINE BRIGHTLY, ROCK RINGS UNDER HAMMER BLOWS IF OF A CRYSTALLINE NATURE. SLIGHT (SLI.) ROCK GENERALLY FRESH, JOINTS STAINED AND DISCOLORATION EXTENDS INTO ROCK UP TO 1 INCH, OPEN JOINTS MAY CONTAIN CLAY, IN GRANITOID ROCKS SOME OCCASIONAL FELDSPAR CRYSTALS ARE DULL AND DISCOLORED, CRYSTALLINE ROCKS RING UNDER HAMMER BLOWS. MODERATE (MOD.) SIGNIFICANT PORTIONS OF ROCK SHOW DISCOLORATION AND WEATHERING EFFECTS. IN GRANITOID ROCKS, MOST FELDSPARS ARE DULL AND DISCOLORED, SOME SHOW CLAY. ROCK HAS DULL SOUND UNDER HAMMER BLOWS AND SHOWS SIGNIFICANT LOSS OF STRENGTH AS COMPARED WITH FRESH ROCK. MODERATELY SEVERE (MOD. SEV.) ALL ROCK EXCEPT QUARTZ DISCOLORED OR STAINED. IN GRANITOID ROCKS, ALL FELDSPARS DULL AND DISCOLORED AND A MAJORITY SHOW KAOLINIZATION. ROCK SHOWS SEVERE LOSS OF STRENGTH AND CAN BE EXCAVATED WITH A GEOLOGIST'S PICK. ROCK GIVES "CLUNK" SOUND WHEN STRUCK. <i>IF TESTED, WOULD YIELD SPT REFUSAL</i> SEVERE (SEV.) ALL ROCK EXCEPT QUARTZ DISCOLORED OR STAINED, ROCK FABRIC CLEAR AND EVIDENT BUT REDUCED IN STRENGTH TO STRONG SOIL. IN GRANITOID ROCKS ALL FELDSPARS ARE KAOLINIZED TO SOME EXTENT, SOME FRAGMENTS OF STRONG ROCK USUALLY REMAIN. <i>IF TESTED, YIELDS SPT N VALUES > 100 BPF</i> VERY SEVERE (V SEV.) ALL ROCK EXCEPT QUARTZ DISCOLORED OR STAINED, ROCK FABRIC ELEMENTS ARE DISCERNIBLE BUT THE MASS IS EFFECTIVELY REDUCED TO SOIL STATUS, WITH ONLY FRAGMENTS OF STRONG ROCK REMAINING. SAPROLITE IS AN EXAMPLE OF ROCK WEATHERED TO A DEGREE SUCH THAT ONLY MINOR VESTIGES OF THE ORIGINAL ROCK FABRIC REMAIN. <i>IF TESTED, YIELDS SPT N VALUES < 100 BPF</i> COMPLETE ROCK REDUCED TO SOIL, ROCK FABRIC NOT DISCERNIBLE, OR DISCERNIBLE ONLY IN SMALL AND SCATTERED CONCENTRATIONS. QUARTZ MAY BE PRESENT AS DIKES OR STRINGERS. SAPROLITE IS ALSO AN EXAMPLE.	WEATHERING FRESH ROCK FRESH, CRYSTALLINE BRIGHT, FEW JOINTS MAY SHOW SLIGHT STAINING, ROCK RINGS UNDER HAMMER IF CRYSTALLINE. VERY SLIGHT (V SLI.) ROCK GENERALLY FRESH, JOINTS STAINED, SOME JOINTS MAY SHOW THIN CLAY COATINGS IF OPEN, CRYSTALS ON A BROKEN SPECIMEN FACE SHINE BRIGHTLY, ROCK RINGS UNDER HAMMER BLOWS IF OF A CRYSTALLINE NATURE. SLIGHT (SLI.) ROCK GENERALLY FRESH, JOINTS STAINED AND DISCOLORATION EXTENDS INTO ROCK UP TO 1 INCH, OPEN JOINTS MAY CONTAIN CLAY, IN GRANITOID ROCKS SOME OCCASIONAL FELDSPAR CRYSTALS ARE DULL AND DISCOLORED, CRYSTALLINE ROCKS RING UNDER HAMMER BLOWS. MODERATE (MOD.) SIGNIFICANT PORTIONS OF ROCK SHOW DISCOLORATION AND WEATHERING EFFECTS. IN GRANITOID ROCKS, MOST FELDSPARS ARE DULL AND DISCOLORED, SOME SHOW CLAY. ROCK HAS DULL SOUND UNDER HAMMER BLOWS AND SHOWS SIGNIFICANT LOSS OF STRENGTH AS COMPARED WITH FRESH ROCK. MODERATELY SEVERE (MOD. SEV.) ALL ROCK EXCEPT QUARTZ DISCOLORED OR STAINED. IN GRANITOID ROCKS, ALL FELDSPARS DULL AND DISCOLORED AND A MAJORITY SHOW KAOLINIZATION. ROCK SHOWS SEVERE LOSS OF STRENGTH AND CAN BE EXCAVATED WITH A GEOLOGIST'S PICK. ROCK GIVES "CLUNK" SOUND WHEN STRUCK. <i>IF TESTED, WOULD YIELD SPT REFUSAL</i> SEVERE (SEV.) ALL ROCK EXCEPT QUARTZ DISCOLORED OR STAINED, ROCK FABRIC CLEAR AND EVIDENT BUT REDUCED IN STRENGTH TO STRONG SOIL. IN GRANITOID ROCKS ALL FELDSPARS ARE KAOLINIZED TO SOME EXTENT, SOME FRAGMENTS OF STRONG ROCK USUALLY REMAIN. <i>IF TESTED, YIELDS SPT N VALUES > 100 BPF</i> VERY SEVERE (V SEV.) ALL ROCK EXCEPT QUARTZ DISCOLORED OR STAINED, ROCK FABRIC ELEMENTS ARE DISCERNIBLE BUT THE MASS IS EFFECTIVELY REDUCED TO SOIL STATUS, WITH ONLY FRAGMENTS OF STRONG ROCK REMAINING. SAPROLITE IS AN EXAMPLE OF ROCK WEATHERED TO A DEGREE SUCH THAT ONLY MINOR VESTIGES OF THE ORIGINAL ROCK FABRIC REMAIN. <i>IF TESTED, YIELDS SPT N VALUES < 100 BPF</i> COMPLETE ROCK REDUCED TO SOIL, ROCK FABRIC NOT DISCERNIBLE, OR DISCERNIBLE ONLY IN SMALL AND SCATTERED CONCENTRATIONS. QUARTZ MAY BE PRESENT AS DIKES OR STRINGERS. SAPROLITE IS ALSO AN EXAMPLE.
CONSISTENCY OR DENSENESS PRIMARY SOIL TYPE COMPACTNESS OR CONSISTENCY RANGE OF STANDARD PENETRATION RESISTANCE (N-VALUE) RANGE OF UNCONFINED COMPRESSIVE STRENGTH (TONS/F ²)	MISCELLANEOUS SYMBOLS ROADWAY EMBANKMENT (RE) WITH SOIL DESCRIPTION SOIL SYMBOL ARTIFICIAL FILL (AF) OTHER THAN ROADWAY EMBANKMENT INFERRED SOIL BOUNDARY INFERRED ROCK LINE ALLUVIAL SOIL BOUNDARY DIP & DIP DIRECTION OF ROCK STRUCTURES TEST BORING AUGER BORING CORE BORING MONITORING WELL PIEZOMETER INSTALLATION SLOPE INDICATOR INSTALLATION CONE PENETROMETER TEST SOUNDING ROD	ROCK HARDNESS VERY HARD CANNOT BE SCRATCHED BY KNIFE OR SHARP PICK. BREAKING OF HAND SPECIMENS REQUIRES SEVERAL HARD BLOWS OF THE GEOLOGIST'S PICK. HARD CAN BE SCRATCHED BY KNIFE OR PICK ONLY WITH DIFFICULTY. HARD HAMMER BLOWS REQUIRED TO DETACH HAND SPECIMEN. MODERATELY HARD CAN BE SCRATCHED BY KNIFE OR PICK. GOUGES OR GROOVES TO 0.25 INCHES DEEP CAN BE EXCAVATED BY HARD BLOW OF A GEOLOGIST'S PICK. HAND SPECIMENS CAN BE DETACHED BY MODERATE BLOWS. MEDIUM HARD CAN BE GROOVED OR GOUGED 0.05 INCHES DEEP BY FIRM PRESSURE OF KNIFE OR PICK POINT. CAN BE EXCAVATED IN SMALL CHIPS TO PEICES 1 INCH MAXIMUM SIZE BY HARD BLOWS OF THE POINT OF A GEOLOGIST'S PICK. SOFT CAN BE GROVED OR GOUGED READILY BY KNIFE OR PICK. CAN BE EXCAVATED IN FRAGMENTS FROM CHIPS TO SEVERAL INCHES IN SIZE BY MODERATE BLOWS OF A PICK POINT. SMALL, THIN PIECES CAN BE BROKEN BY FINGER PRESSURE. VERY SOFT CAN BE CARVED WITH KNIFE. CAN BE EXCAVATED READILY WITH POINT OF PICK. PIECES 1 INCH OR MORE IN THICKNESS CAN BE BROKEN BY FINGER PRESSURE. CAN BE SCRATCHED READILY BY FINGER NAIL.	ROCK HARDNESS VERY HARD CANNOT BE SCRATCHED BY KNIFE OR SHARP PICK. BREAKING OF HAND SPECIMENS REQUIRES SEVERAL HARD BLOWS OF THE GEOLOGIST'S PICK. HARD CAN BE SCRATCHED BY KNIFE OR PICK ONLY WITH DIFFICULTY. HARD HAMMER BLOWS REQUIRED TO DETACH HAND SPECIMEN. MODERATELY HARD CAN BE SCRATCHED BY KNIFE OR PICK. GOUGES OR GROOVES TO 0.25 INCHES DEEP CAN BE EXCAVATED BY HARD BLOW OF A GEOLOGIST'S PICK. HAND SPECIMENS CAN BE DETACHED BY MODERATE BLOWS. MEDIUM HARD CAN BE GROOVED OR GOUGED 0.05 INCHES DEEP BY FIRM PRESSURE OF KNIFE OR PICK POINT. CAN BE EXCAVATED IN SMALL CHIPS TO PEICES 1 INCH MAXIMUM SIZE BY HARD BLOWS OF THE POINT OF A GEOLOGIST'S PICK. SOFT CAN BE GROVED OR GOUGED READILY BY KNIFE OR PICK. CAN BE EXCAVATED IN FRAGMENTS FROM CHIPS TO SEVERAL INCHES IN SIZE BY MODERATE BLOWS OF A PICK POINT. SMALL, THIN PIECES CAN BE BROKEN BY FINGER PRESSURE. VERY SOFT CAN BE CARVED WITH KNIFE. CAN BE EXCAVATED READILY WITH POINT OF PICK. PIECES 1 INCH OR MORE IN THICKNESS CAN BE BROKEN BY FINGER PRESSURE. CAN BE SCRATCHED READILY BY FINGER NAIL.
TEXTURE OR GRAIN SIZE U.S. STD. SIEVE SIZE OPENING (MM) 4, 10, 40, 60, 200, 270 4.76, 2.00, 0.42, 0.25, 0.075, 0.053 BOULDER (BLDR.), COBBLE (COB.), GRAVEL (GR.), COARSE SAND (CSE, SD.), FINE SAND (F SD.), SILT (SL.), CLAY (CL.) GRAIN SIZE MM 305, 75, 2.0, 0.25, 0.05, 0.005 IN. 12, 3	ABBREVIATIONS AR - AUGER REFUSAL BT - BORING TERMINATED CL - CLAY CPT - CONE PENETRATION TEST CSE - COARSE DMT - DILATOMETER TEST DPT - DYNAMIC PENETRATION TEST e - VOID RATIO F - FINE FOSS. - FOSSILIFEROUS FRAC. - FRACTURED, FRACTURES FRAGS. - FRAGMENTS HI. - HIGHLY MED. - MEDIUM MICA - MICA MOD. - MODERATELY NP - NON PLASTIC ORG. - ORGANIC PMT - PRESSUREMETER TEST SAP. - SAPROLITIC SD. - SAND, SANDY SL. - SILT, SILTY SLI. - SLIGHTLY TCR - TRICONE REFUSAL w - MOISTURE CONTENT V - VERY VST - VANE SHEAR TEST WEA. - WEATHERED γ - UNIT WEIGHT γ _d - DRY UNIT WEIGHT S - BULK SS - SPLIT SPOON ST - SHELBY TUBE RS - ROCK RT - RECOMPACTED TRIAXIAL CBR - CALIFORNIA BEARING RATIO	FRACTURE SPACING TERM SPACING VERY WIDE MORE THAN 10 FEET WIDE 3 TO 10 FEET MODERATELY CLOSE 1 TO 3 FEET CLOSE 0.16 TO 1 FEET VERY CLOSE LESS THAN 0.16 FEET BEDDING TERM THICKNESS VERY THICKLY BEDDED > 4 FEET THICKLY BEDDED 1.5 - 4 FEET THINLY BEDDED 0.16 - 1.5 FEET VERY THINLY BEDDED 0.03 - 0.16 FEET THICKLY LAMINATED 0.008 - 0.03 FEET THINLY LAMINATED < 0.008 FEET	ROCK HARDNESS VERY HARD CANNOT BE SCRATCHED BY KNIFE OR SHARP PICK. BREAKING OF HAND SPECIMENS REQUIRES SEVERAL HARD BLOWS OF THE GEOLOGIST'S PICK. HARD CAN BE SCRATCHED BY KNIFE OR PICK ONLY WITH DIFFICULTY. HARD HAMMER BLOWS REQUIRED TO DETACH HAND SPECIMEN. MODERATELY HARD CAN BE SCRATCHED BY KNIFE OR PICK. GOUGES OR GROOVES TO 0.25 INCHES DEEP CAN BE EXCAVATED BY HARD BLOW OF A GEOLOGIST'S PICK. HAND SPECIMENS CAN BE DETACHED BY MODERATE BLOWS. MEDIUM HARD CAN BE GROOVED OR GOUGED 0.05 INCHES DEEP BY FIRM PRESSURE OF KNIFE OR PICK POINT. CAN BE EXCAVATED IN SMALL CHIPS TO PEICES 1 INCH MAXIMUM SIZE BY HARD BLOWS OF THE POINT OF A GEOLOGIST'S PICK. SOFT CAN BE GROVED OR GOUGED READILY BY KNIFE OR PICK. CAN BE EXCAVATED IN FRAGMENTS FROM CHIPS TO SEVERAL INCHES IN SIZE BY MODERATE BLOWS OF A PICK POINT. SMALL, THIN PIECES CAN BE BROKEN BY FINGER PRESSURE. VERY SOFT CAN BE CARVED WITH KNIFE. CAN BE EXCAVATED READILY WITH POINT OF PICK. PIECES 1 INCH OR MORE IN THICKNESS CAN BE BROKEN BY FINGER PRESSURE. CAN BE SCRATCHED READILY BY FINGER NAIL.
SOIL MOISTURE - CORRELATION OF TERMS SOIL MOISTURE SCALE (ATTERBERG LIMITS) FIELD MOISTURE DESCRIPTION GUIDE FOR FIELD MOISTURE DESCRIPTION LL - LIQUID LIMIT - SATURATED - (SAT.) USUALLY LIQUID; VERY WET, USUALLY FROM BELOW THE GROUND WATER TABLE PL - PLASTIC LIMIT - WET - (W) SEMISOLID; REQUIRES DRYING TO ATTAIN OPTIMUM MOISTURE OM - OPTIMUM MOISTURE - MOIST - (M) SOLID; AT OR NEAR OPTIMUM MOISTURE SL - SHRINKAGE LIMIT - DRY - (D) REQUIRES ADDITIONAL WATER TO ATTAIN OPTIMUM MOISTURE	EQUIPMENT USED ON SUBJECT PROJECT DRILL UNITS: MOBILE B-57, BK-51, CME-45C, CME-550, PORTABLE HOIST ADVANCING TOOLS: CLAY BITS, 6" CONTINUOUS FLIGHT AUGER, 8" HOLLOW AUGERS, HARD FACED FINGER BITS, TUNG-CARBIDE INSERTS, CASING w/ ADVANCER, TRICONE STEEL TEETH, TRICONE 2 1/8" TUNG-CARB., CORE BIT HAMMER TYPE: AUTOMATIC, MANUAL CORE SIZE: B, N 0 2, H HAND TOOLS: POST HOLE DIGGER, HAND AUGER, SOUNDING ROD, VANE SHEAR TEST	INDURATION FOR SEDIMENTARY ROCKS, INDURATION IS THE HARDENING OF THE MATERIAL BY CEMENTING, HEAT, PRESSURE, ETC. FRIABLE RUBBING WITH FINGER FREES NUMEROUS GRAINS; GENTLE BLOW BY HAMMER DISINTEGRATES SAMPLE. MODERATELY INDURATED GRAINS CAN BE SEPARATED FROM SAMPLE WITH STEEL PROBE; BREAKS EASILY WHEN HIT WITH HAMMER. INDURATED GRAINS ARE DIFFICULT TO SEPARATE WITH STEEL PROBE; DIFFICULT TO BREAK WITH HAMMER. EXTREMELY INDURATED SHARP HAMMER BLOWS REQUIRED TO BREAK SAMPLE; SAMPLE BREAKS ACROSS GRAINS.	ROCK HARDNESS VERY HARD CANNOT BE SCRATCHED BY KNIFE OR SHARP PICK. BREAKING OF HAND SPECIMENS REQUIRES SEVERAL HARD BLOWS OF THE GEOLOGIST'S PICK. HARD CAN BE SCRATCHED BY KNIFE OR PICK ONLY WITH DIFFICULTY. HARD HAMMER BLOWS REQUIRED TO DETACH HAND SPECIMEN. MODERATELY HARD CAN BE SCRATCHED BY KNIFE OR PICK. GOUGES OR GROOVES TO 0.25 INCHES DEEP CAN BE EXCAVATED BY HARD BLOW OF A GEOLOGIST'S PICK. HAND SPECIMENS CAN BE DETACHED BY MODERATE BLOWS. MEDIUM HARD CAN BE GROOVED OR GOUGED 0.05 INCHES DEEP BY FIRM PRESSURE OF KNIFE OR PICK POINT. CAN BE EXCAVATED IN SMALL CHIPS TO PEICES 1 INCH MAXIMUM SIZE BY HARD BLOWS OF THE POINT OF A GEOLOGIST'S PICK. SOFT CAN BE GROVED OR GOUGED READILY BY KNIFE OR PICK. CAN BE EXCAVATED IN FRAGMENTS FROM CHIPS TO SEVERAL INCHES IN SIZE BY MODERATE BLOWS OF A PICK POINT. SMALL, THIN PIECES CAN BE BROKEN BY FINGER PRESSURE. VERY SOFT CAN BE CARVED WITH KNIFE. CAN BE EXCAVATED READILY WITH POINT OF PICK. PIECES 1 INCH OR MORE IN THICKNESS CAN BE BROKEN BY FINGER PRESSURE. CAN BE SCRATCHED READILY BY FINGER NAIL.
PLASTICITY NONPLASTIC 0-5 VERY LOW LOW PLASTICITY 6-15 SLIGHT MED. PLASTICITY 16-25 MEDIUM HIGH PLASTICITY 26 OR MORE HIGH			TERMS AND DEFINITIONS BENCH MARK: BM#4 (489.31 FT N, 1436.058 FT E) BM#3 (489.121 FT N, 1436.021 FT E) ELEVATION: SEE NOTES FT. NOTES: FIAD - FILLED IN AFTER DRILLING CT - CORING TERMINATED ELEVATIONS BM#4 - 558.64 FT BM#3 - 558.64 FT
COLOR DESCRIPTIONS MAY INCLUDE COLOR OR COLOR COMBINATIONS (TAN, RED, YELLOW-BROWN, BLUE-GRAY). MODIFIERS SUCH AS LIGHT, DARK, STREAKED, ETC. ARE USED TO DESCRIBE APPEARANCE.			

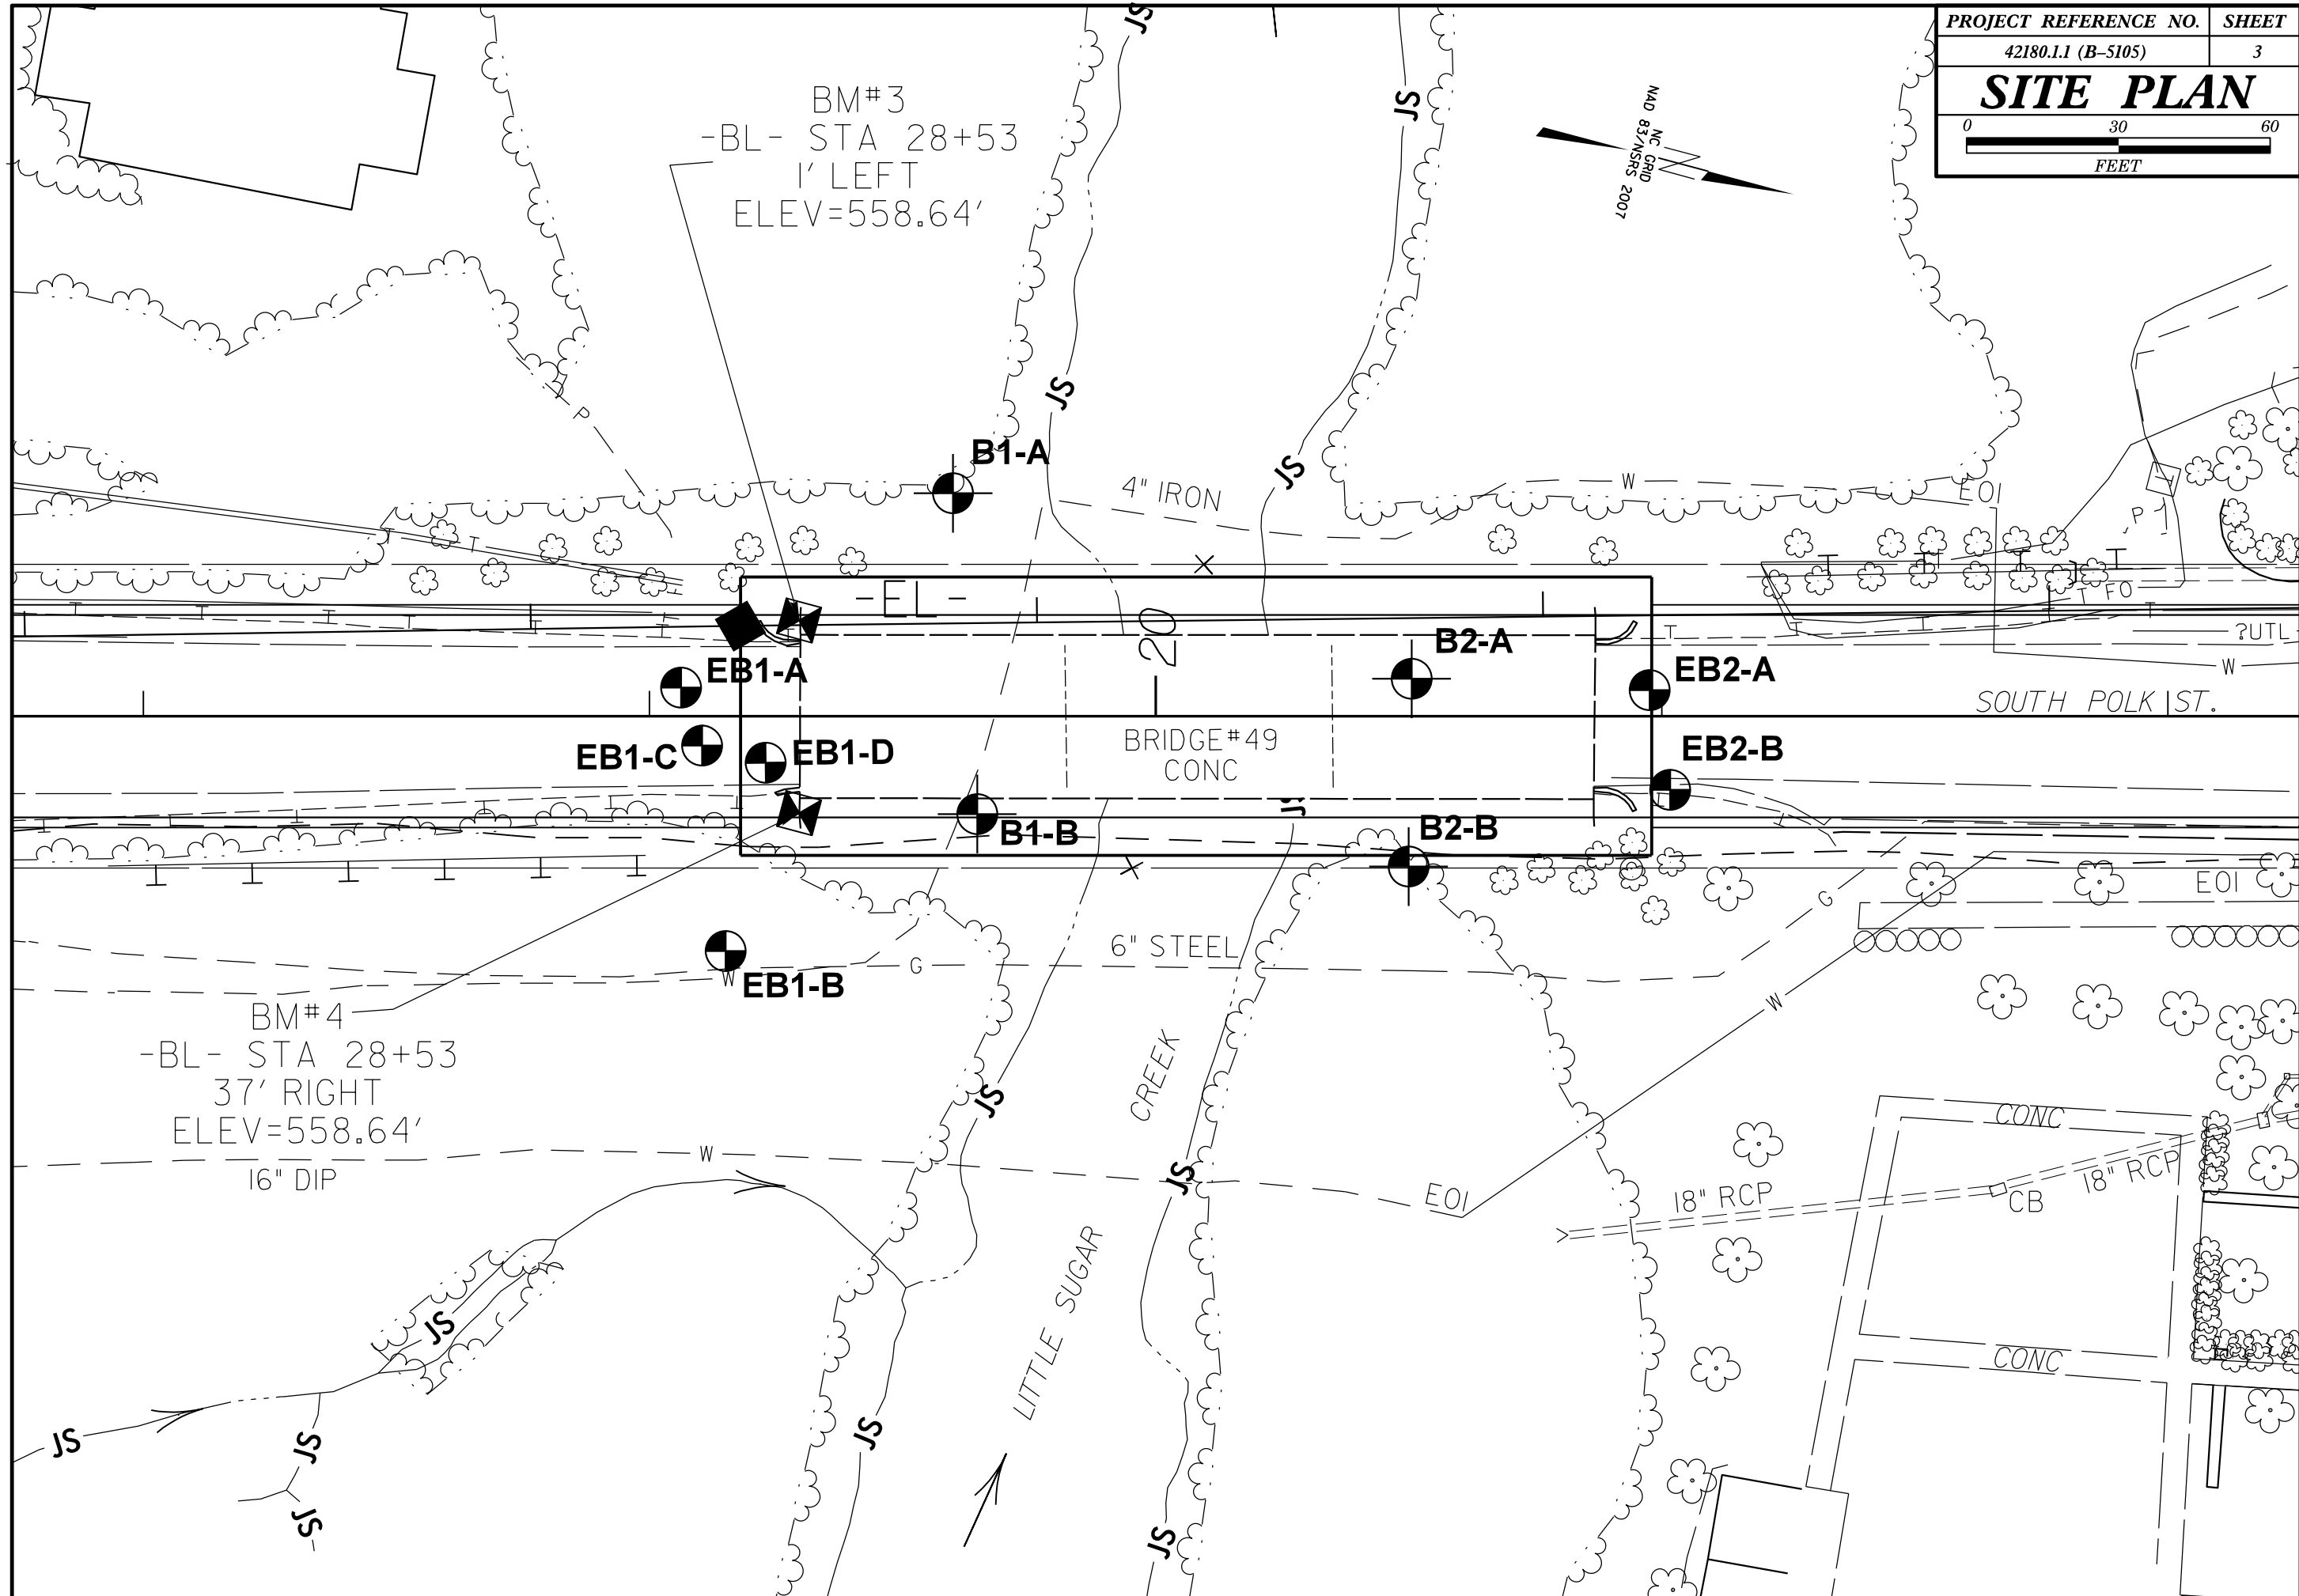

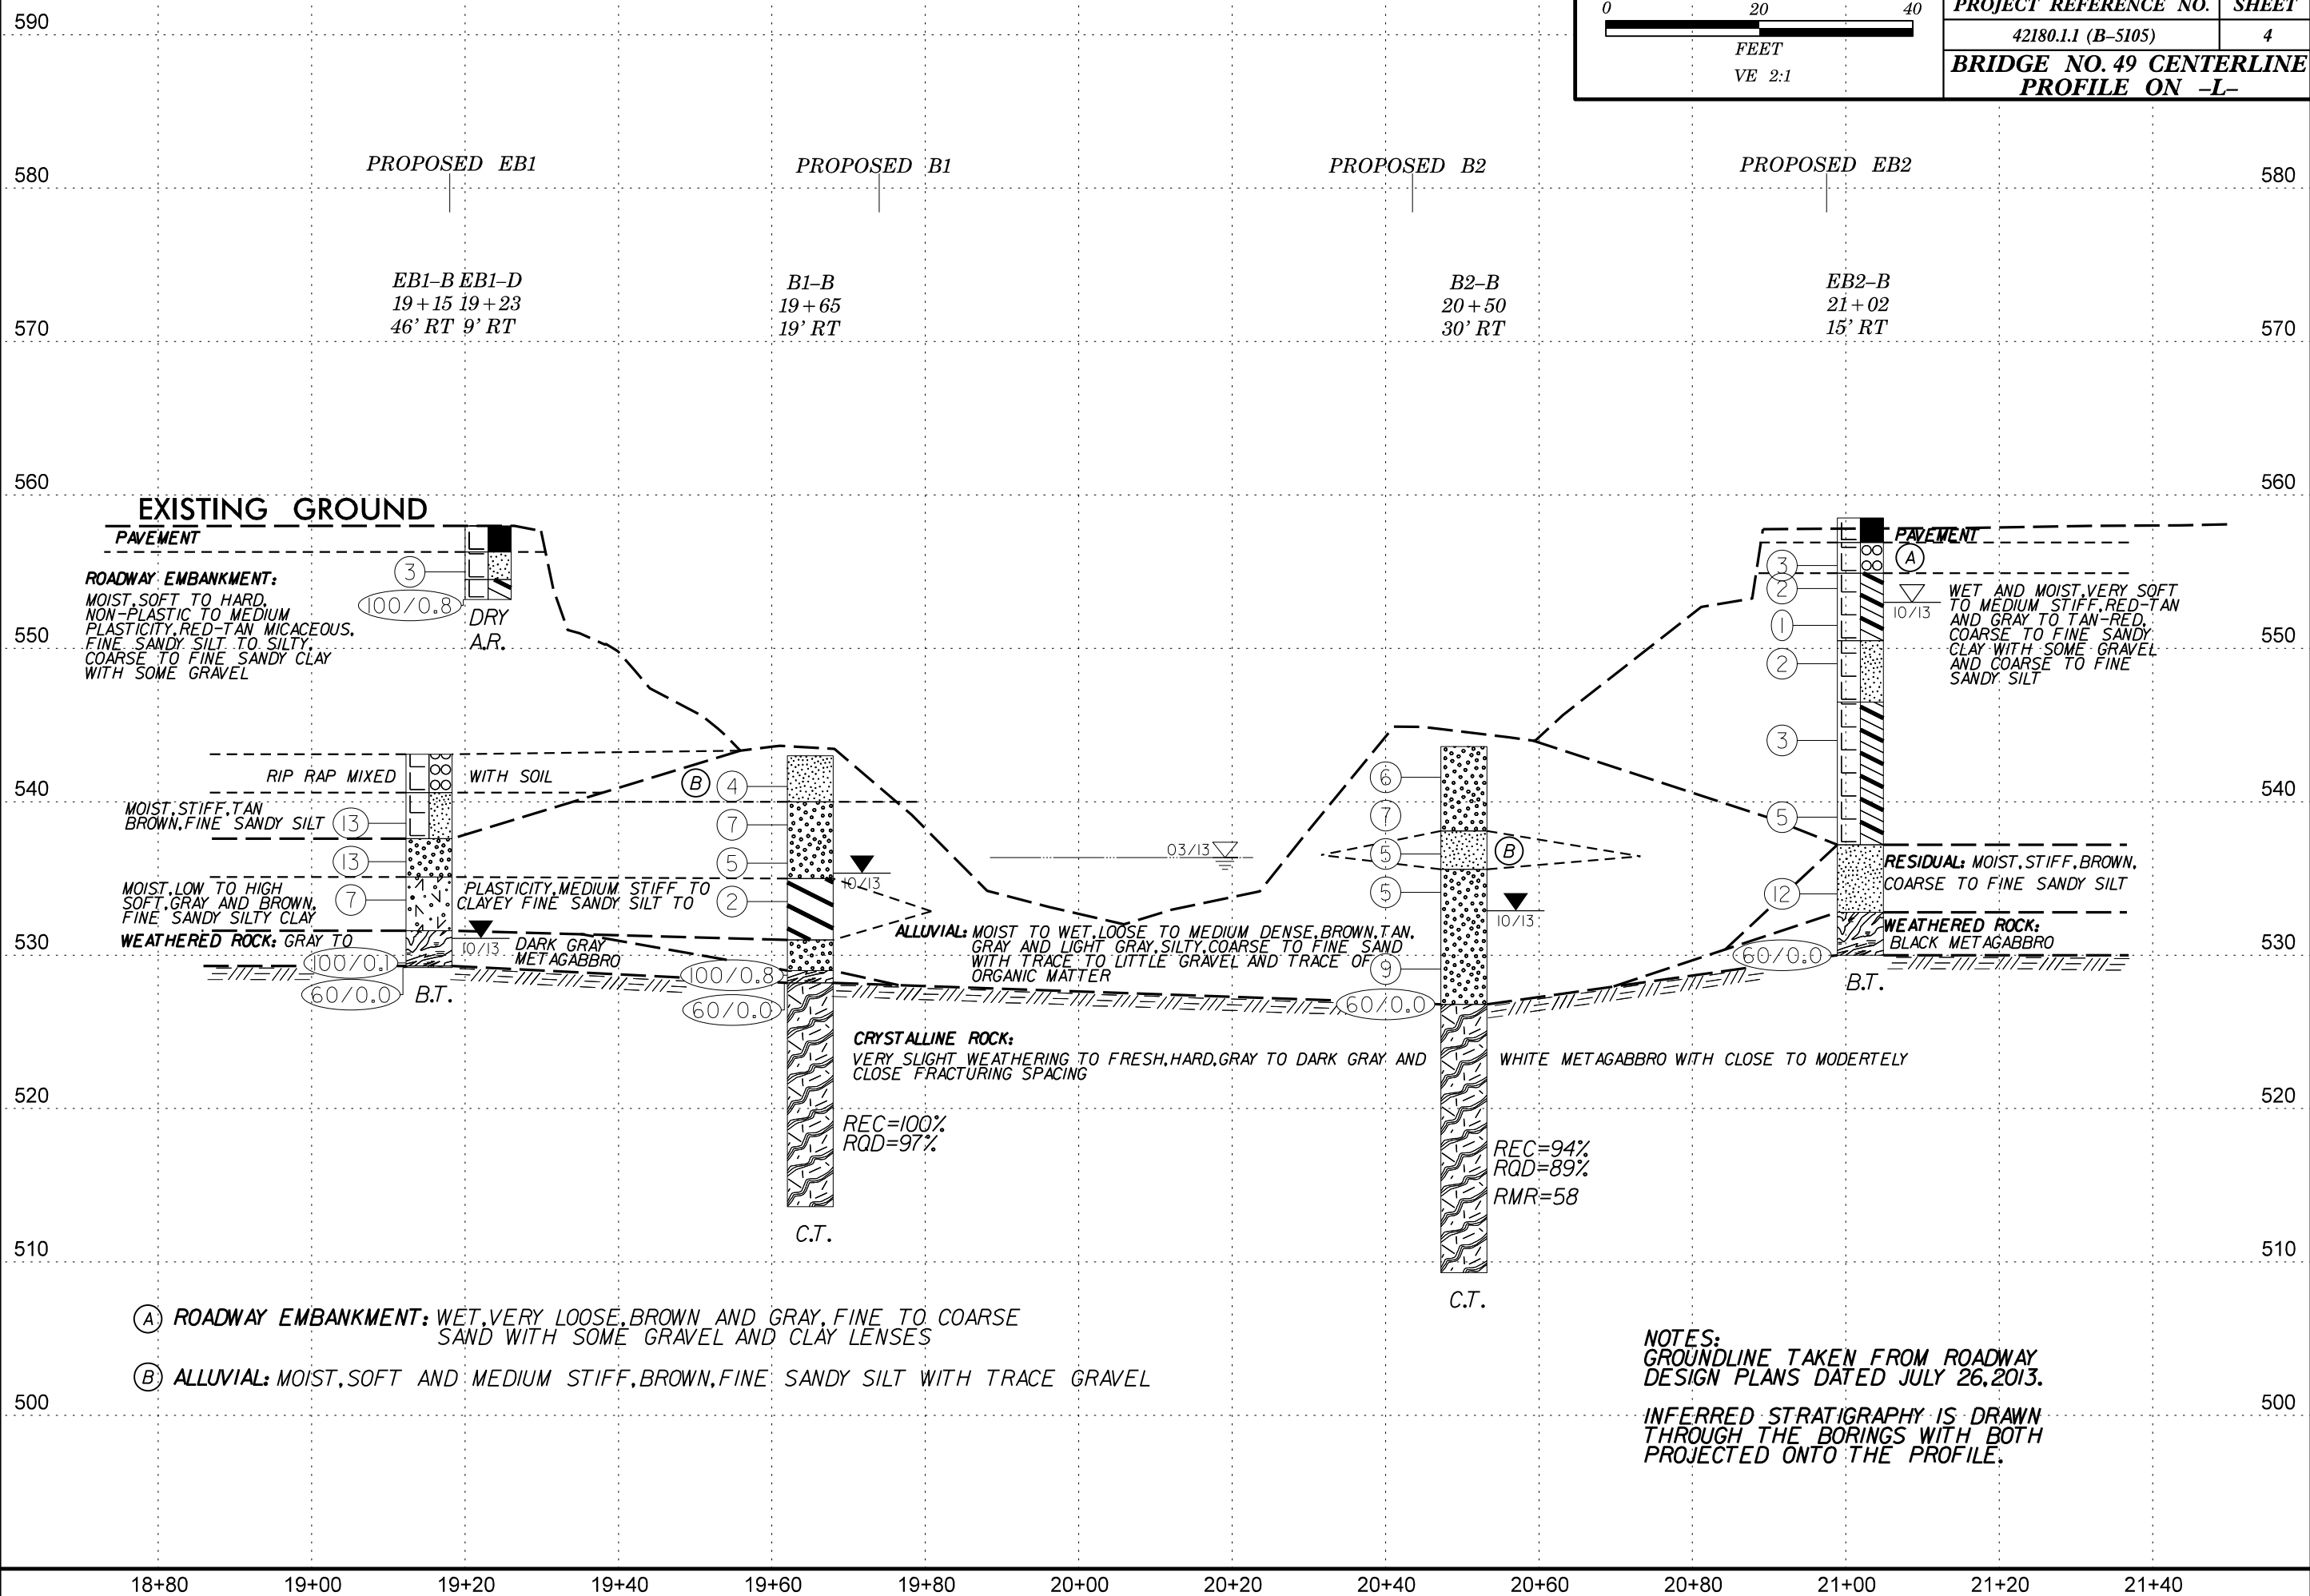


PROJECT REFERENCE NO.	SHEET
42180.1.1 (B-5105)	4
BRIDGE NO. 49 CENTERLINE PROFILE ON -L-	

- (A) ROADWAY EMBANKMENT: WET, VERY LOOSE, BROWN AND GRAY, FINE TO COARSE SAND WITH SOME GRAVEL AND CLAY LENSES
- (B) ALLUVIAL: MOIST, SOFT AND MEDIUM STIFF, BROWN, FINE SANDY SILT WITH TRACE GRAVEL

NOTES:
GROUNDLINE TAKEN FROM ROADWAY DESIGN PLANS DATED JULY 26, 2013.
INFERRED STRATIGRAPHY IS DRAWN THROUGH THE BORINGS WITH BOTH PROJECTED ONTO THE PROFILE.

BRIDGE NO. 49

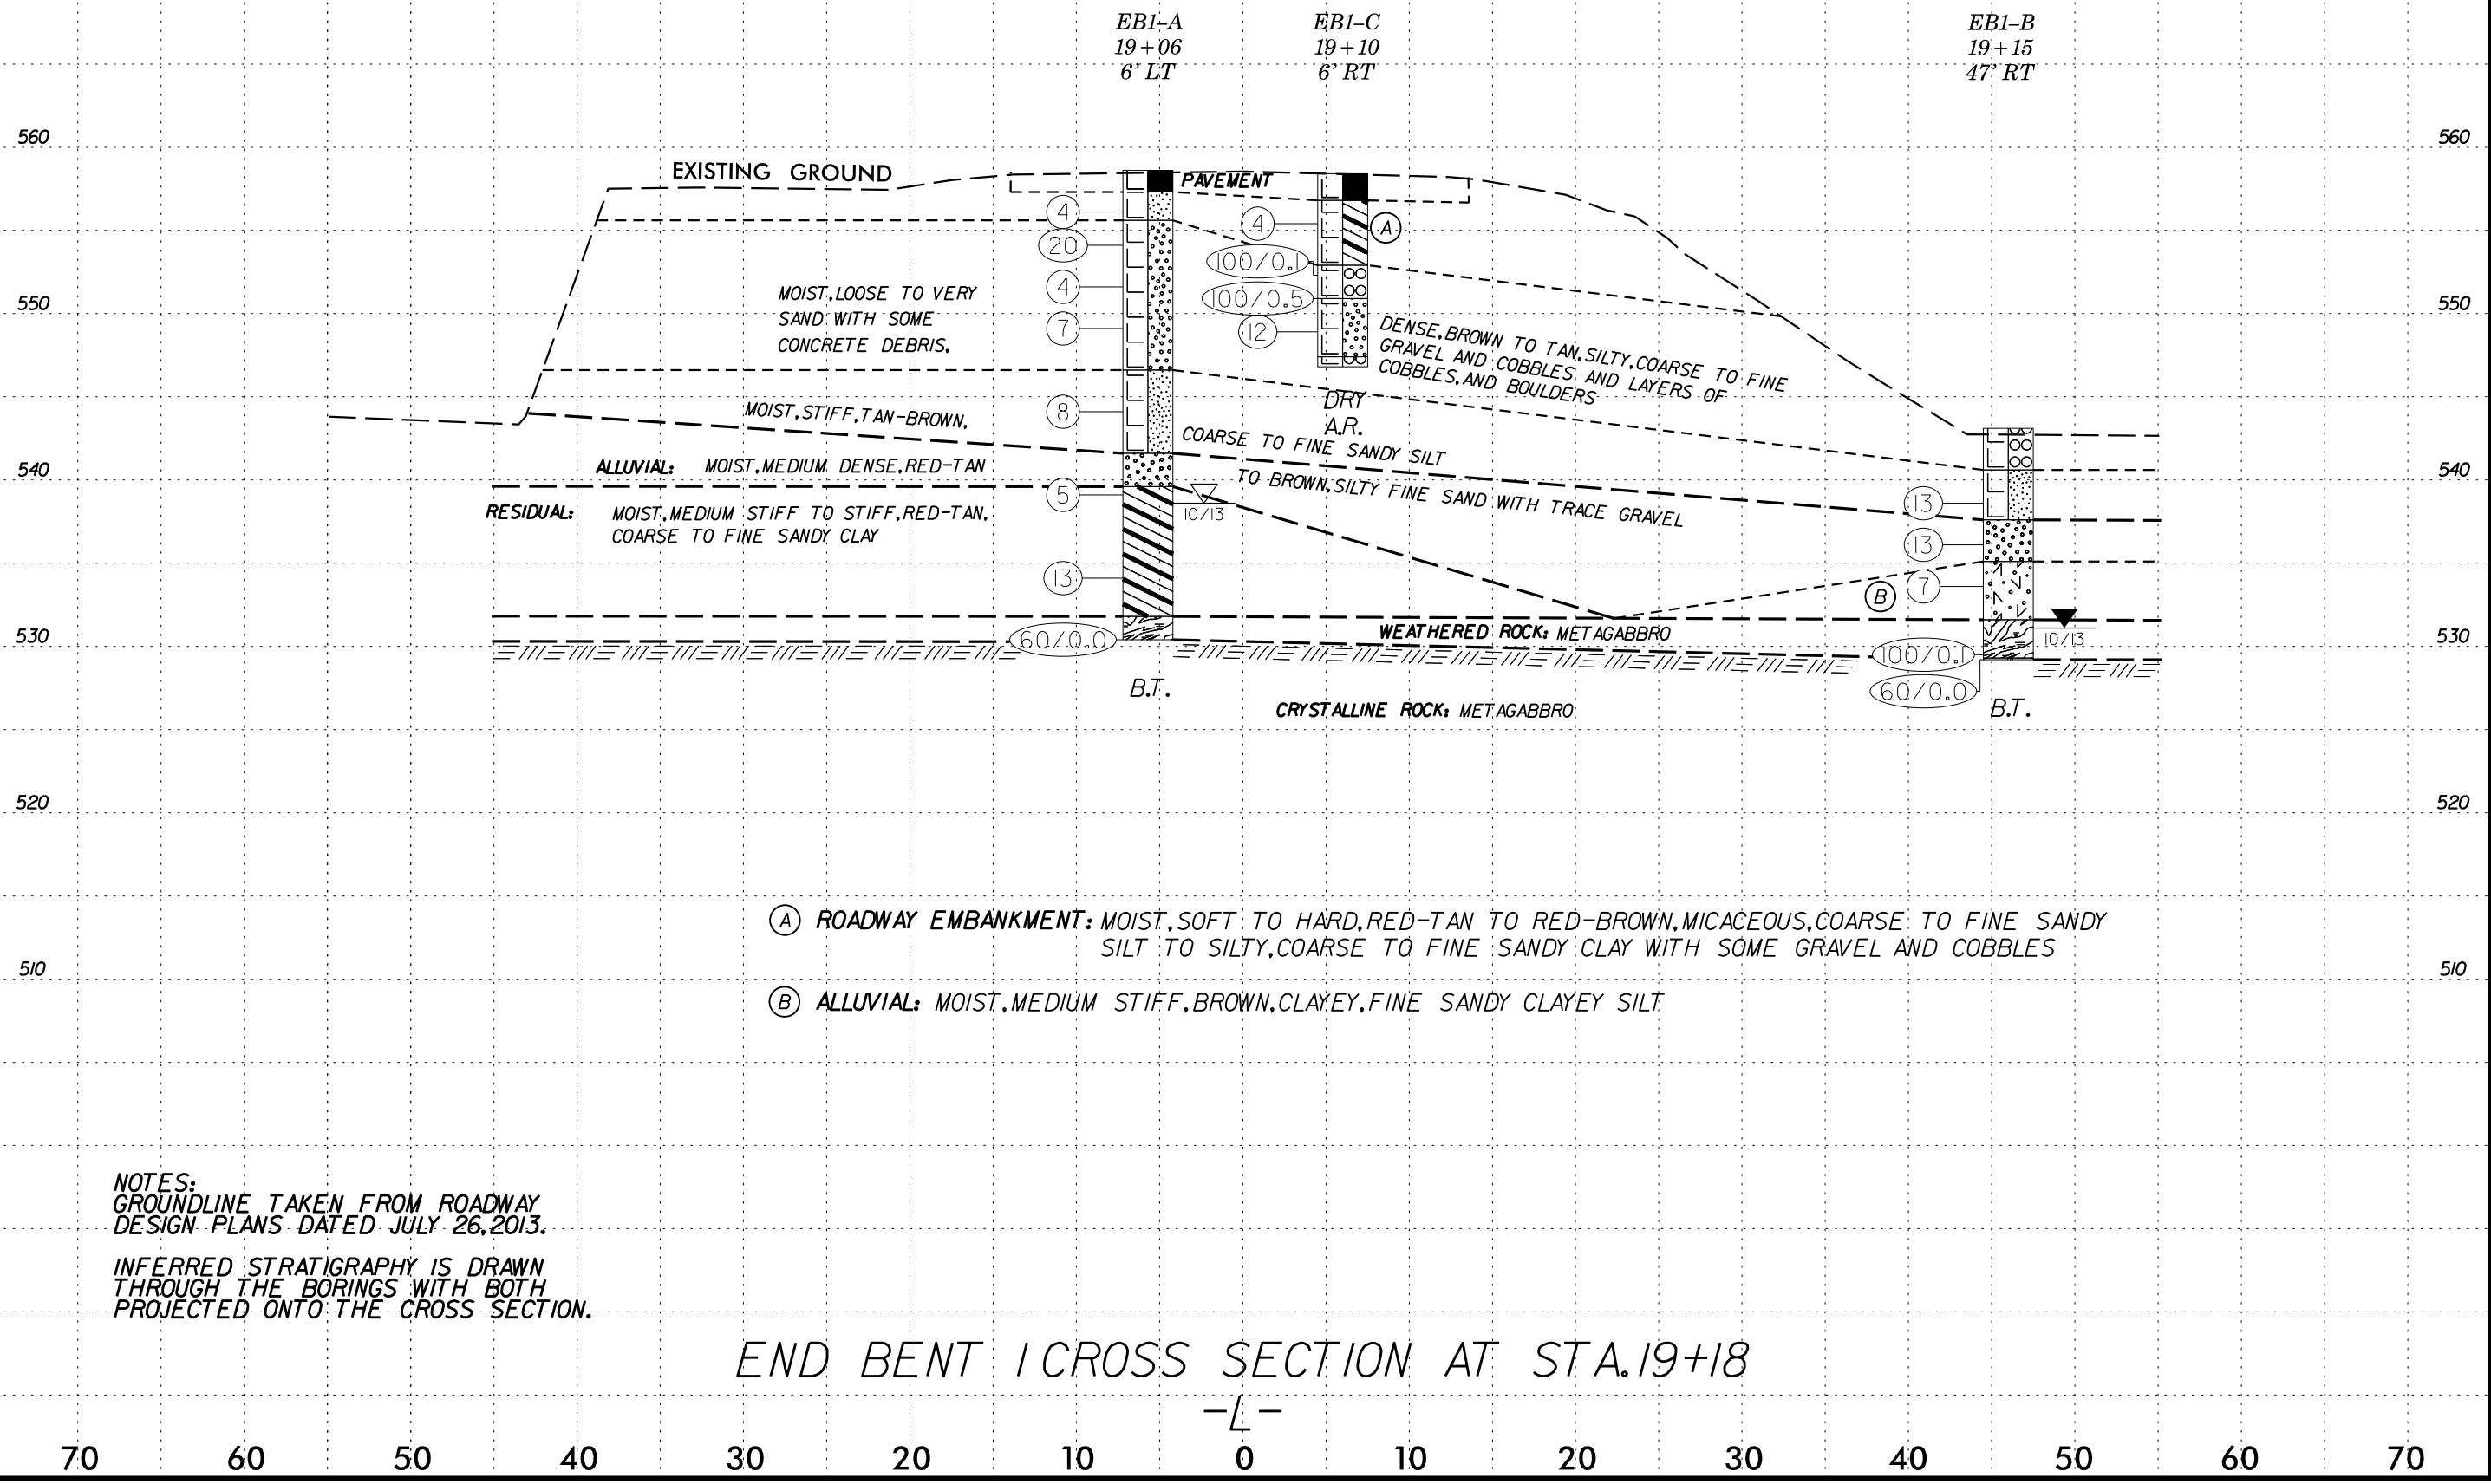


- (A) ROADWAY EMBANKMENT: MOIST, SOFT TO HARD, RED-TAN TO RED-BROWN, MICACEOUS, COARSE TO FINE SANDY SILT TO SILTY, COARSE TO FINE SANDY CLAY WITH SOME GRAVEL AND COBBLES
- (B) ALLUVIAL: MOIST, MEDIUM STIFF, BROWN, CLAYEY, FINE SANDY CLAYEY SILT

NOTES:
 GROUNDLINE TAKEN FROM ROADWAY
 DESIGN PLANS DATED JULY 26, 2013.
 INFERRED STRATIGRAPHY IS DRAWN
 THROUGH THE BORINGS WITH BOTH
 PROJECTED ONTO THE CROSS SECTION.

END BENT 1 CROSS SECTION AT STA. 19+18


8/31/2012 12:15:44 PM W:\skbrn\GEO\TECHNICAL\Projects\Active Projects\127994 B-51\19\B519_GEO\REV_2012-08-27\B519_GEO_BROG0349\B519_GEO_sub_BROG0519_XSECT_on.Ldgn

BRIDGE NO. 49



B1-A
19+60
44' LT

B1-B
19+65
19' RT

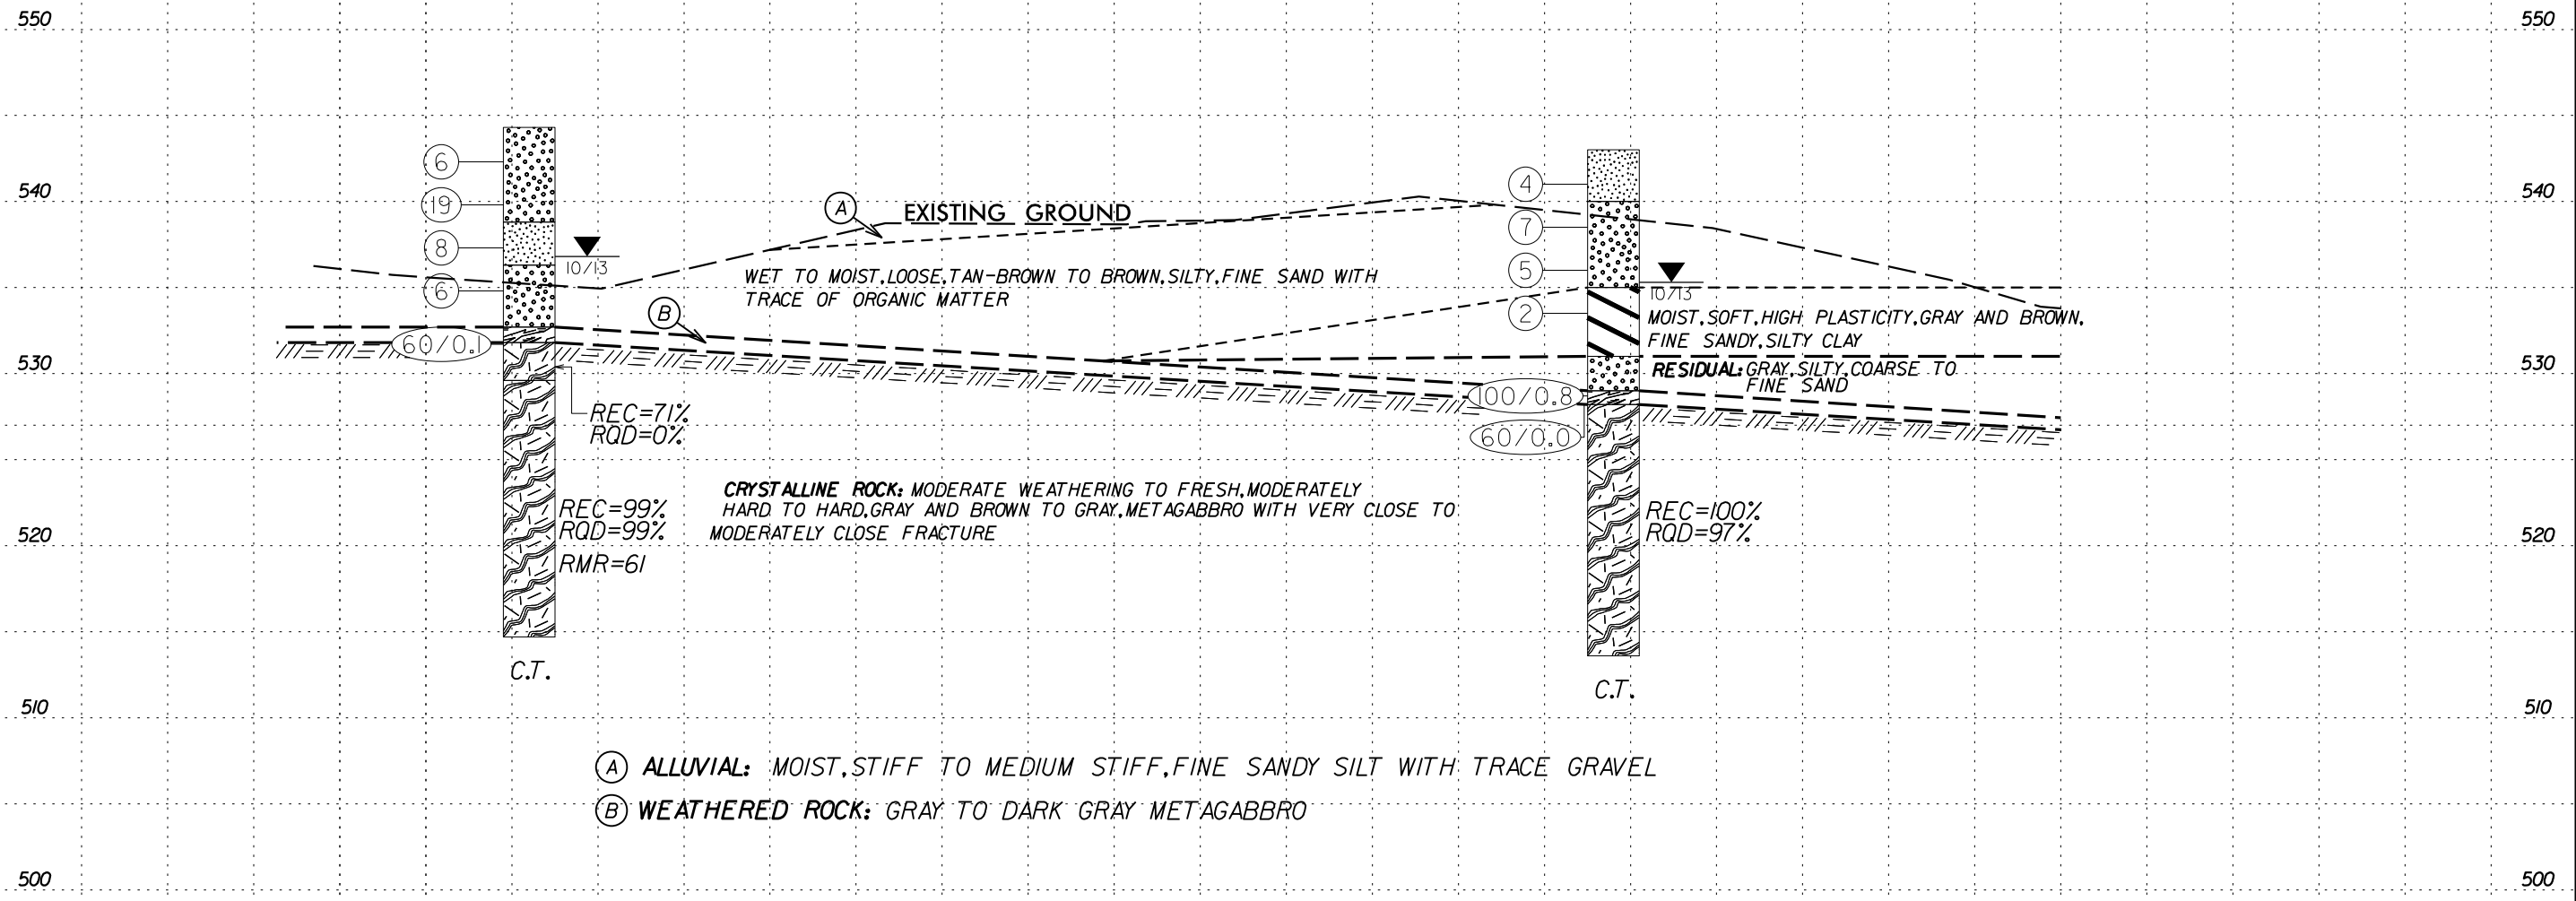


- (A) ALLUVIAL: MOIST, STIFF TO MEDIUM STIFF, FINE SANDY SILT WITH TRACE GRAVEL
- (B) WEATHERED ROCK: GRAY TO DARK GRAY METAGABBRO

NOTES:
GROUNDLINE TAKEN FROM ROADWAY
DESIGN PLANS DATED JULY 26, 2013.

INFERRED STRATIGRAPHY IS DRAWN
THROUGH THE BORINGS WITH BOTH
PROJECTED ONTO THE CROSS SECTION.



BENT 1 CROSS SECTION AT STA. 19+74



70 60 50 40 30 20 10 0 10 20 30 40 50 60 70

8/31/2012 12:15:44 PM W:\shred\GEO\TECHNICAL\Projects\Active Projects\127994_B-5105\B5105_GEO_REV_2012-08-27\B5105_GEO.sub_BRD0519_XSECT_on.Ldgn

BRIDGE NO. 49

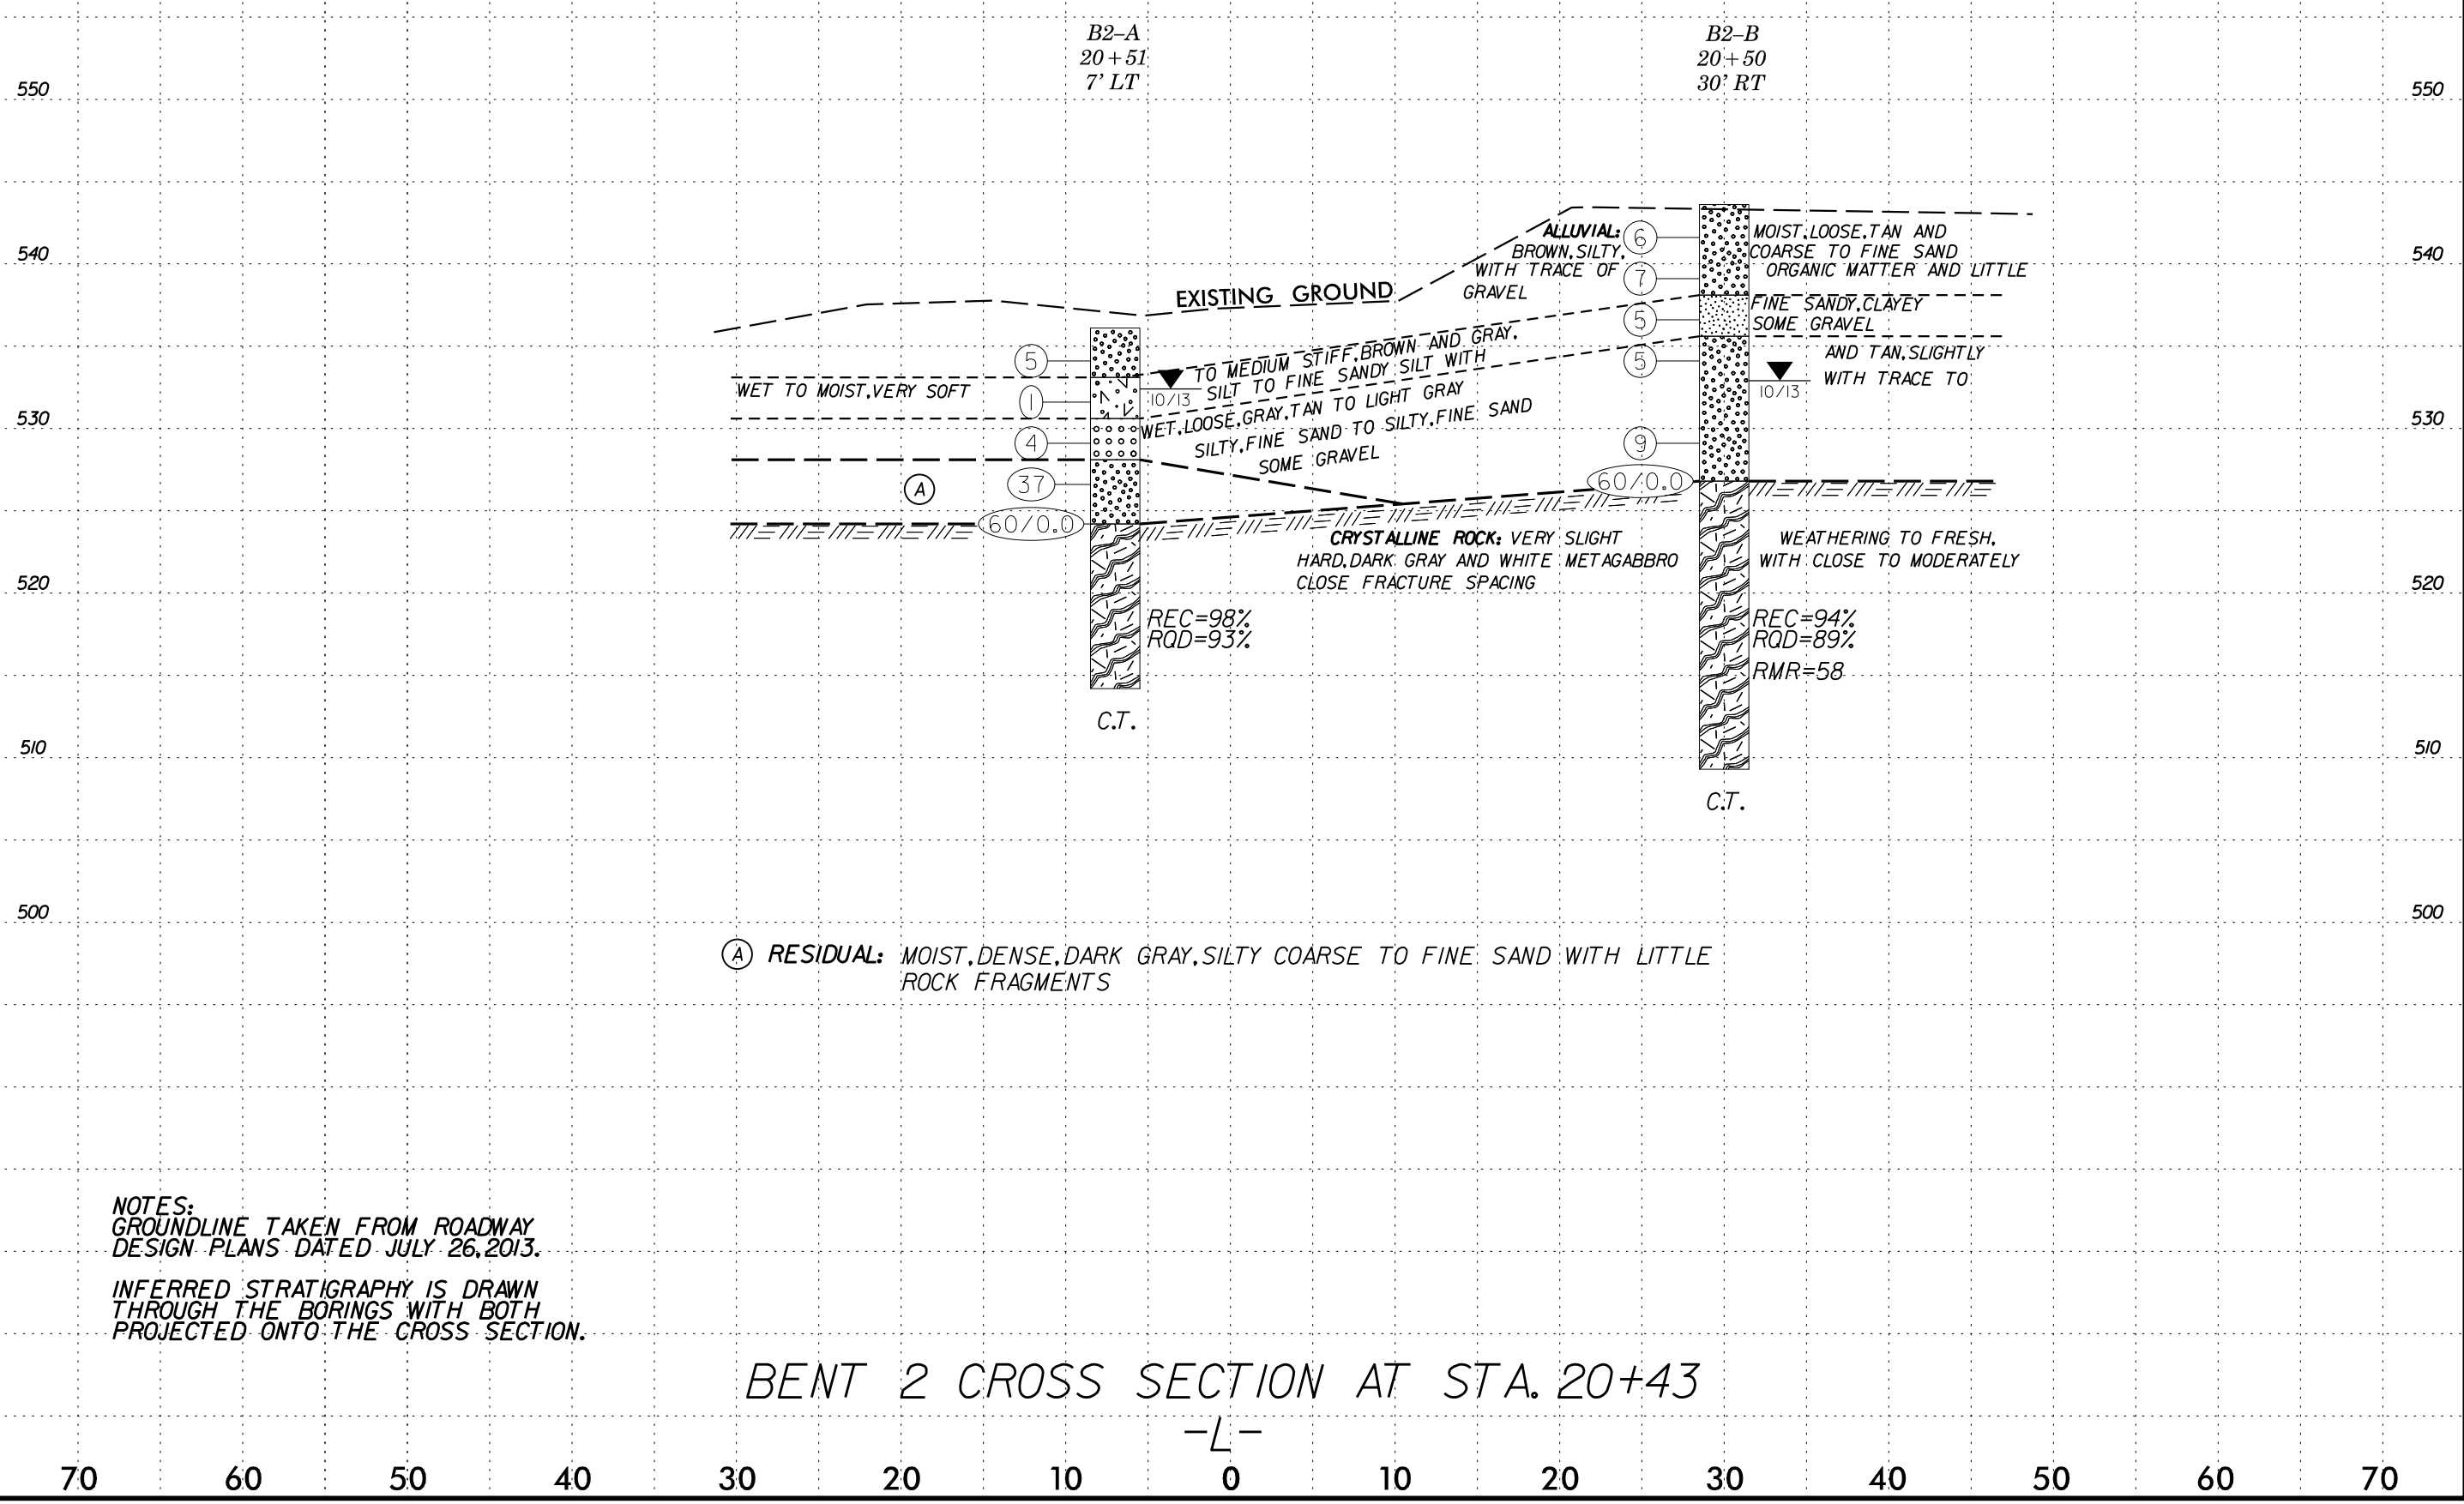

B2-A
20+51
7' LT

B2-B
20+50
30' RT

EXISTING GROUND

WET TO MOIST, VERY SOFT

TO MEDIUM STIFF, BROWN AND GRAY

10/13 SILT TO FINE SANDY SILT WITH

WET, LOOSE, GRAY, TAN TO LIGHT GRAY

SILTY, FINE SAND TO SILTY, FINE SAND

SOME GRAVEL

CRYSTALLINE ROCK: VERY SLIGHT

HARD, DARK GRAY AND WHITE METAGABBRO

CLOSE FRACTURE SPACING

REC=98%
RQD=93%

C.T.

ALLUVIAL: BROWN, SILTY, WITH TRACE OF GRAVEL

MOIST, LOOSE, TAN AND COARSE TO FINE SAND ORGANIC MATTER AND LITTLE

FINE SANDY, CLAYEY SOME GRAVEL

AND TAN, SLIGHTLY WITH TRACE TO

WEATHERING TO FRESH, WITH CLOSE TO MODERATELY

REC=94%
RQD=89%
RMR=58

C.T.

(A) RESIDUAL: MOIST, DENSE, DARK GRAY, SILTY COARSE TO FINE SAND WITH LITTLE ROCK FRAGMENTS

NOTES:
GROUNDLINE TAKEN FROM ROADWAY DESIGN PLANS DATED JULY 26, 2013.
INFERRED STRATIGRAPHY IS DRAWN THROUGH THE BORINGS WITH BOTH PROJECTED ONTO THE CROSS SECTION.

BENT 2 CROSS SECTION AT STA. 20+43


-L-

8/31/2012 12:15:44 PM W:\shred\GEO\TECHNICAL\Projects\Active Projects\127994_B-51\B5119_GEO\REV_2012-08-27\B5119_GEO.sub_BRD0519_XSECT_on.Ldgn

70 60 50 40 30 20 10 0 10 20 30 40 50 60 70

BRIDGE NO. 49

B:\31\2012\12\15\44 PM W:\shreel\GEO\TECHNICAL\Projects\Active Projects\127994_B-5105\B5105_GEO_REV_2012-08-27\B5105_GEO.sub_BRD0519_XSECT_on.Ldgn

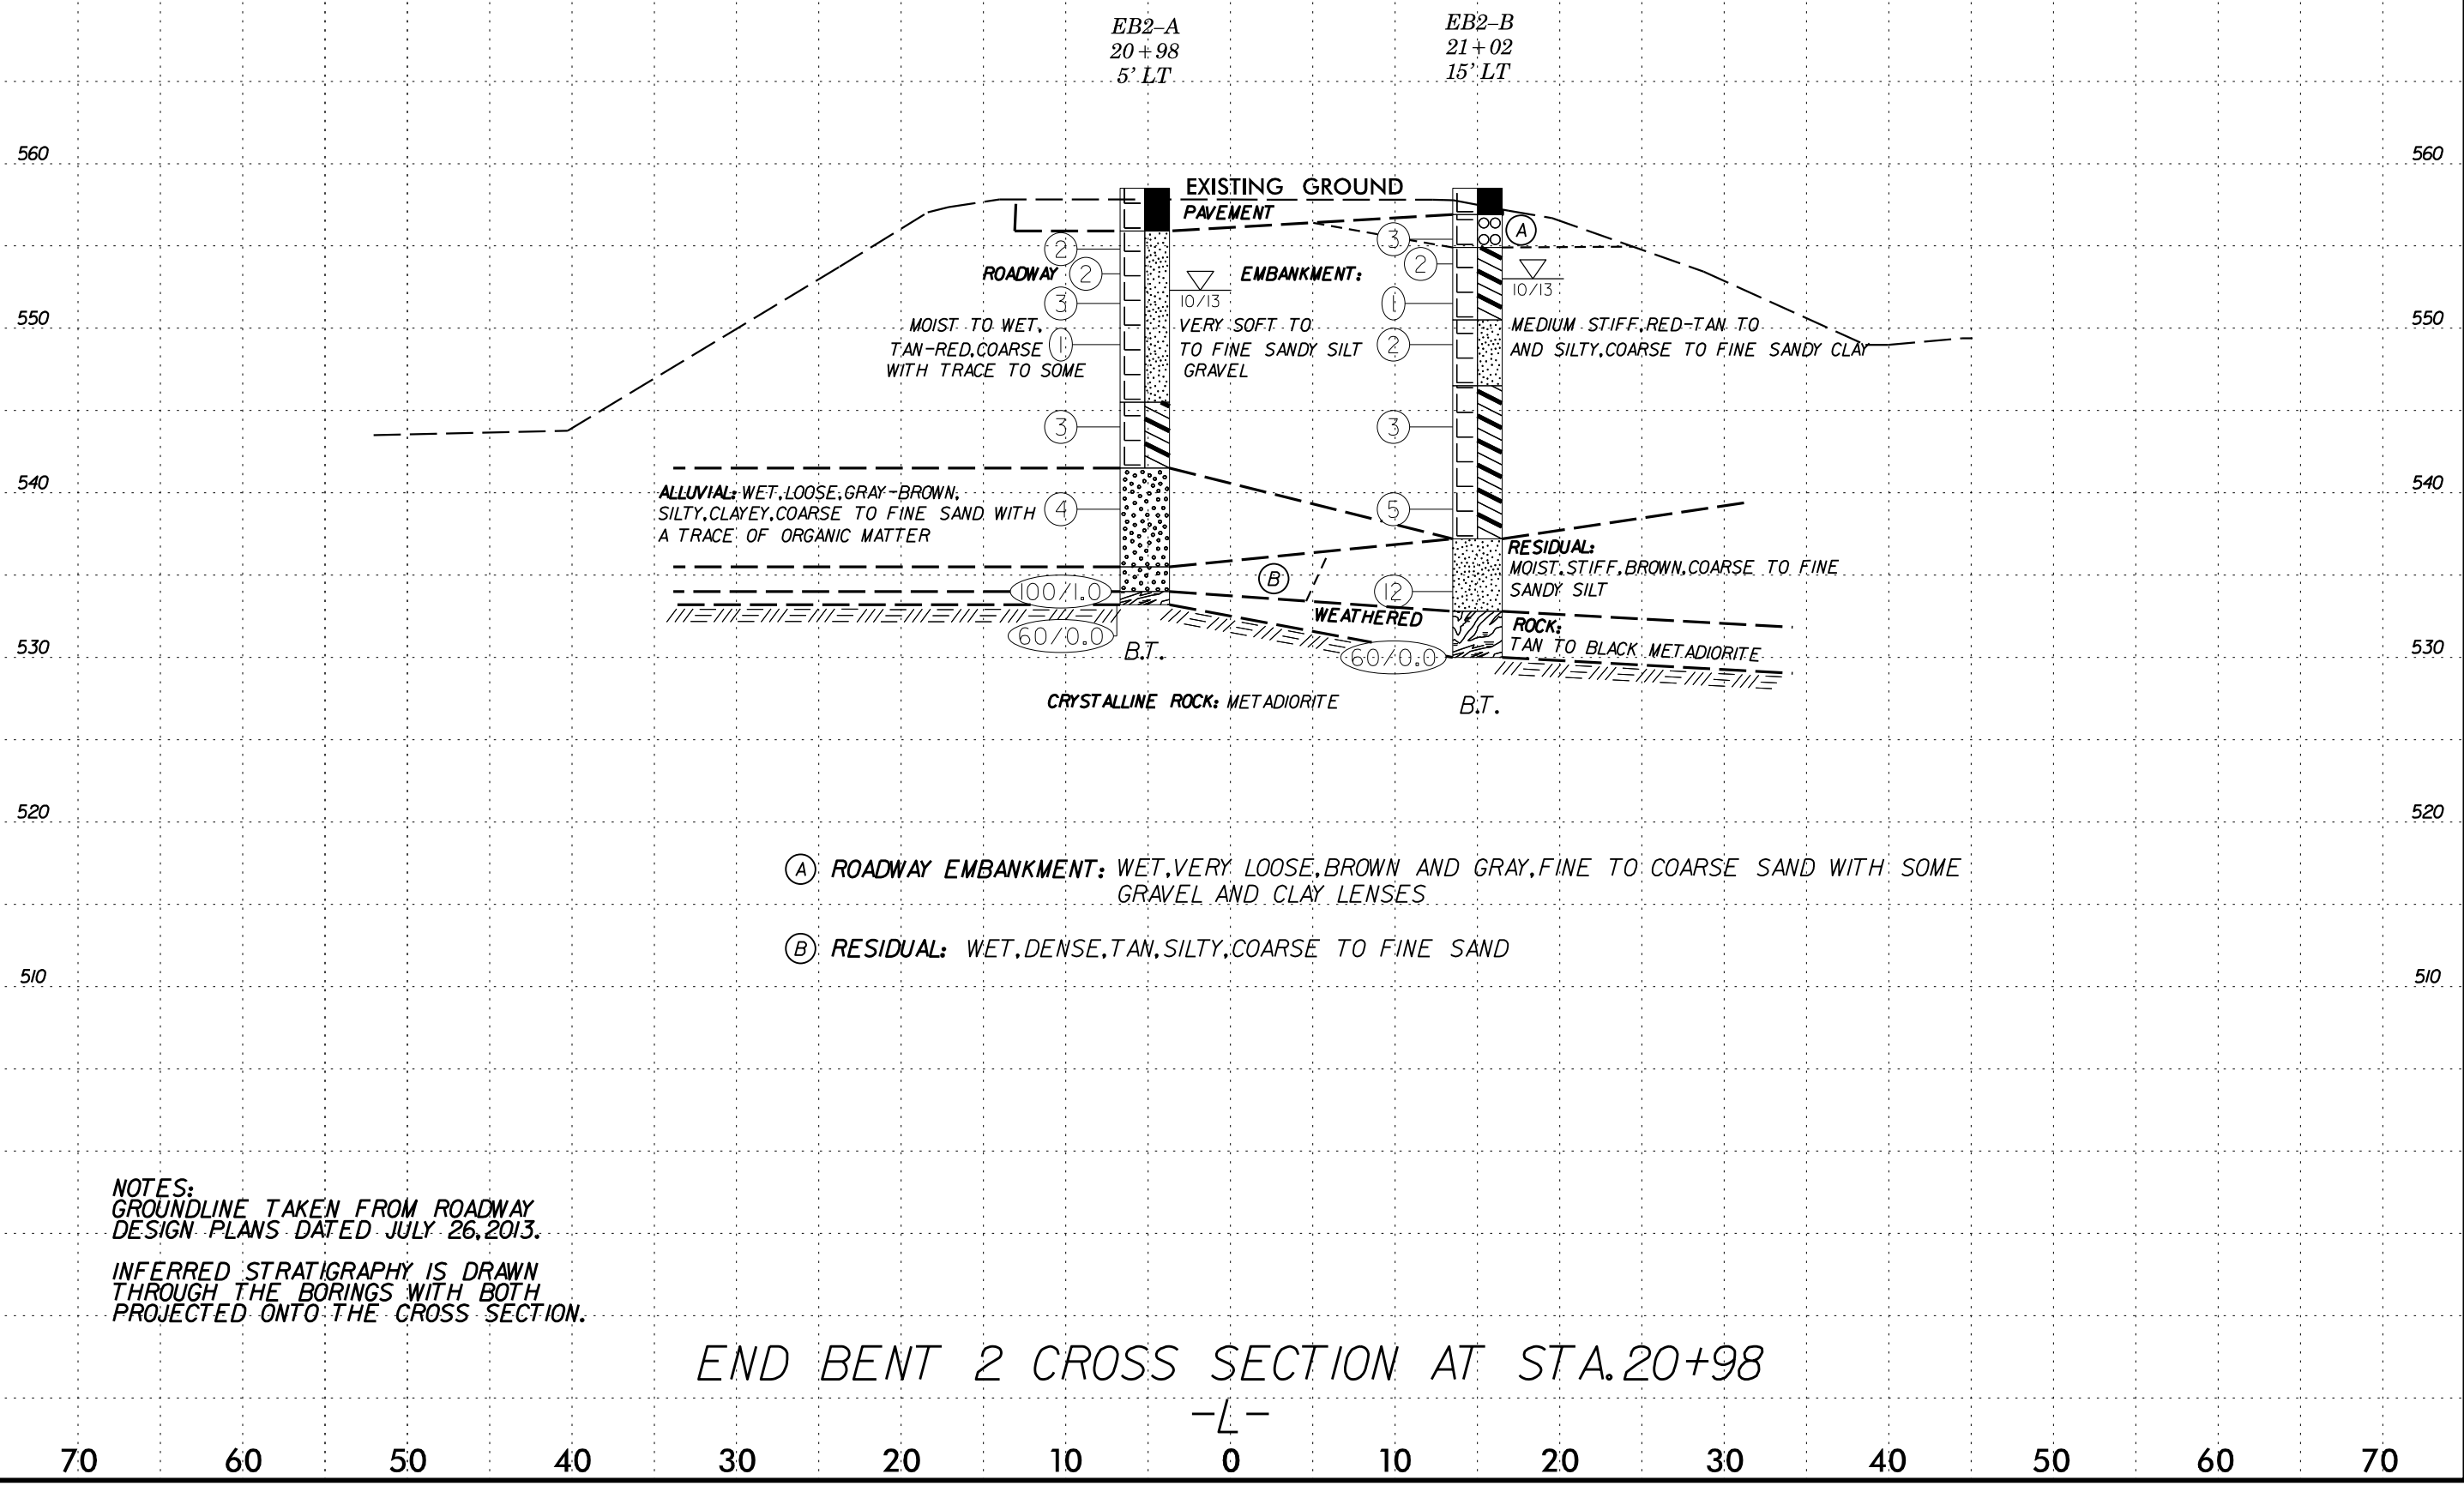

NCDOT GEOTECHNICAL ENGINEERING UNIT
BORELOG REPORT

WBS 42180.1.1	TIP B-5105	COUNTY MECKLENBURG	GEOLOGIST Goodnight, D. J.
SITE DESCRIPTION Bridge No. 49 over Little Sugar Creek on SR 4982 (Lancaster Highway)			GROUND WTR (ft)
BORING NO. EB1-A	STATION 19+06	OFFSET 6 ft LT	ALIGNMENT -L-
COLLAR ELEV. 558.5 ft	TOTAL DEPTH 28.2 ft	NORTHING 489,102	EASTING 1,436,040
DRILL RIG/HAMMER EFF./DATE SOI8513 CME-550X 90% 08/21/2013		DRILL METHOD Mud Rotary	HAMMER TYPE Automatic
DRILLER White, J. F.	START DATE 10/15/13	COMP. DATE 10/15/13	SURFACE WATER DEPTH N/A

ELEV (ft)	DRIVE ELEV (ft)	DEPTH (ft)	BLOW COUNT			BLOWS PER FOOT					SAMP. NO.	LOG	SOIL AND ROCK DESCRIPTION	DEPTH (ft)	
			0.5ft	0.5ft	0.5ft	0	25	50	75	100					
560														558.5 GROUND SURFACE 0.0	
	557.0	1.5	1	2	2									557.2 Asphalt (0.0 to 0.8 feet) Concrete (0.8 to 1.3 feet) 1.3	
555	555.0	3.5	6	10	10									555.5 ROADWAY EMBANKMENT 3.0	
	552.5	6.0	3	2	2									Red-Tan, Coarse to Fine SANDY SILT	
550	550.0	8.5	3	4	3									Brown, Silty, Coarse to Fine SAND with Some to Little Gravel and Some Clay Lenses	
545	545.0	13.5	4	4	4									546.5 Tan-Brown, Coarse to Fine SANDY SILT 12.9	
540	540.0	18.5	2	2	3									541.5 ALLUVIAL 17.0	
	539.5													Red-Tan, Silty, Fine SAND	
535	535.0	23.5	4	5	8									RESIDUAL	
	531.7													Red-Tan, Coarse to Fine SANDY CLAY	
	530.3	28.2												531.7 WEATHERED ROCK 26.8	
														Black METAGABBRO	
														Boring Terminated with Standard Penetration Test Refusal at Elevation 530.3 ft on CRYSTALLINE ROCK: METAGABBRO	

WBS 42180.1.1	TIP B-5105	COUNTY MECKLENBURG	GEOLOGIST Goodnight, D. J.
SITE DESCRIPTION Bridge No. 49 over Little Sugar Creek on SR 4982 (Lancaster Highway)			GROUND WTR (ft)
BORING NO. EB1-C	STATION 19+10	OFFSET 6 ft RT	ALIGNMENT -L-
COLLAR ELEV. 558.4 ft	TOTAL DEPTH 11.6 ft	NORTHING 489,109	EASTING 1,436,050
DRILL RIG/HAMMER EFF./DATE SOI8513 CME-550X 90% 08/21/2013		DRILL METHOD H.S. Augers	HAMMER TYPE Automatic
DRILLER White, J. F.	START DATE 10/14/13	COMP. DATE 10/14/13	SURFACE WATER DEPTH N/A


ELEV (ft)	DRIVE ELEV (ft)	DEPTH (ft)	BLOW COUNT			BLOWS PER FOOT					SAMP. NO.	LOG	SOIL AND ROCK DESCRIPTION	DEPTH (ft)	
			0.5ft	0.5ft	0.5ft	0	25	50	75	100					
560														558.4 GROUND SURFACE 0.0	
	556.4	2.0	2	2	2									556.8 Asphalt (0.0 to 0.8 feet) Concrete (0.8 to 1.3 feet) ABC Stone (1.3 to 1.6 feet) 1.6	
555	554.9	3.5	100/0.5											555.4 ROADWAY EMBANKMENT 3.0	
	552.4	6.0	100/0.1											Red-Brown, Silty, Coarse to Fine SANDY CLAY with Some Gravel and Cobbles	
550	549.9	8.5	3	6	6									Concrete Debris, Cobbles, and Boulders	
	547.4													Tan, Silty, Coarse to Fine SAND with Some Gravel and Concrete Debris	
	546.8													Concrete Debris and Boulders	
														Boring Terminated by Auger Refusal at Elevation 546.8 ft in ROADWAY EMBANKMENT: Concrete Debris and Boulders	
														Notes: Boring Terminated because auger broke off below the ground surface. N-Values of 100/0.1 and 100/0.5 were influenced by the presence of concrete debris, cobbles, and boulders.	




NCDOT GEOTECHNICAL ENGINEERING UNIT

BORELOG REPORT

WBS 42180.1.1	TIP B-5105	COUNTY MECKLENBURG	GEOLOGIST Goodnight, D. J.
SITE DESCRIPTION Bridge No. 49 over Little Sugar Creek on SR 4982 (Lancaster Highway)			GROUND WTR (ft)
BORING NO. EB1-D	STATION 19+23	OFFSET 9 ft RT	ALIGNMENT -L-
COLLAR ELEV. 558.4 ft	TOTAL DEPTH 4.8 ft	NORTHING 489,122	EASTING 1,436,050
DRILL RIG/HAMMER EFF./DATE SOI8513 CME-550X 90% 08/21/2013		DRILL METHOD H.S. Augers	HAMMER TYPE Automatic
DRILLER White, J. F.	START DATE 10/14/13	COMP. DATE 10/14/13	SURFACE WATER DEPTH N/A

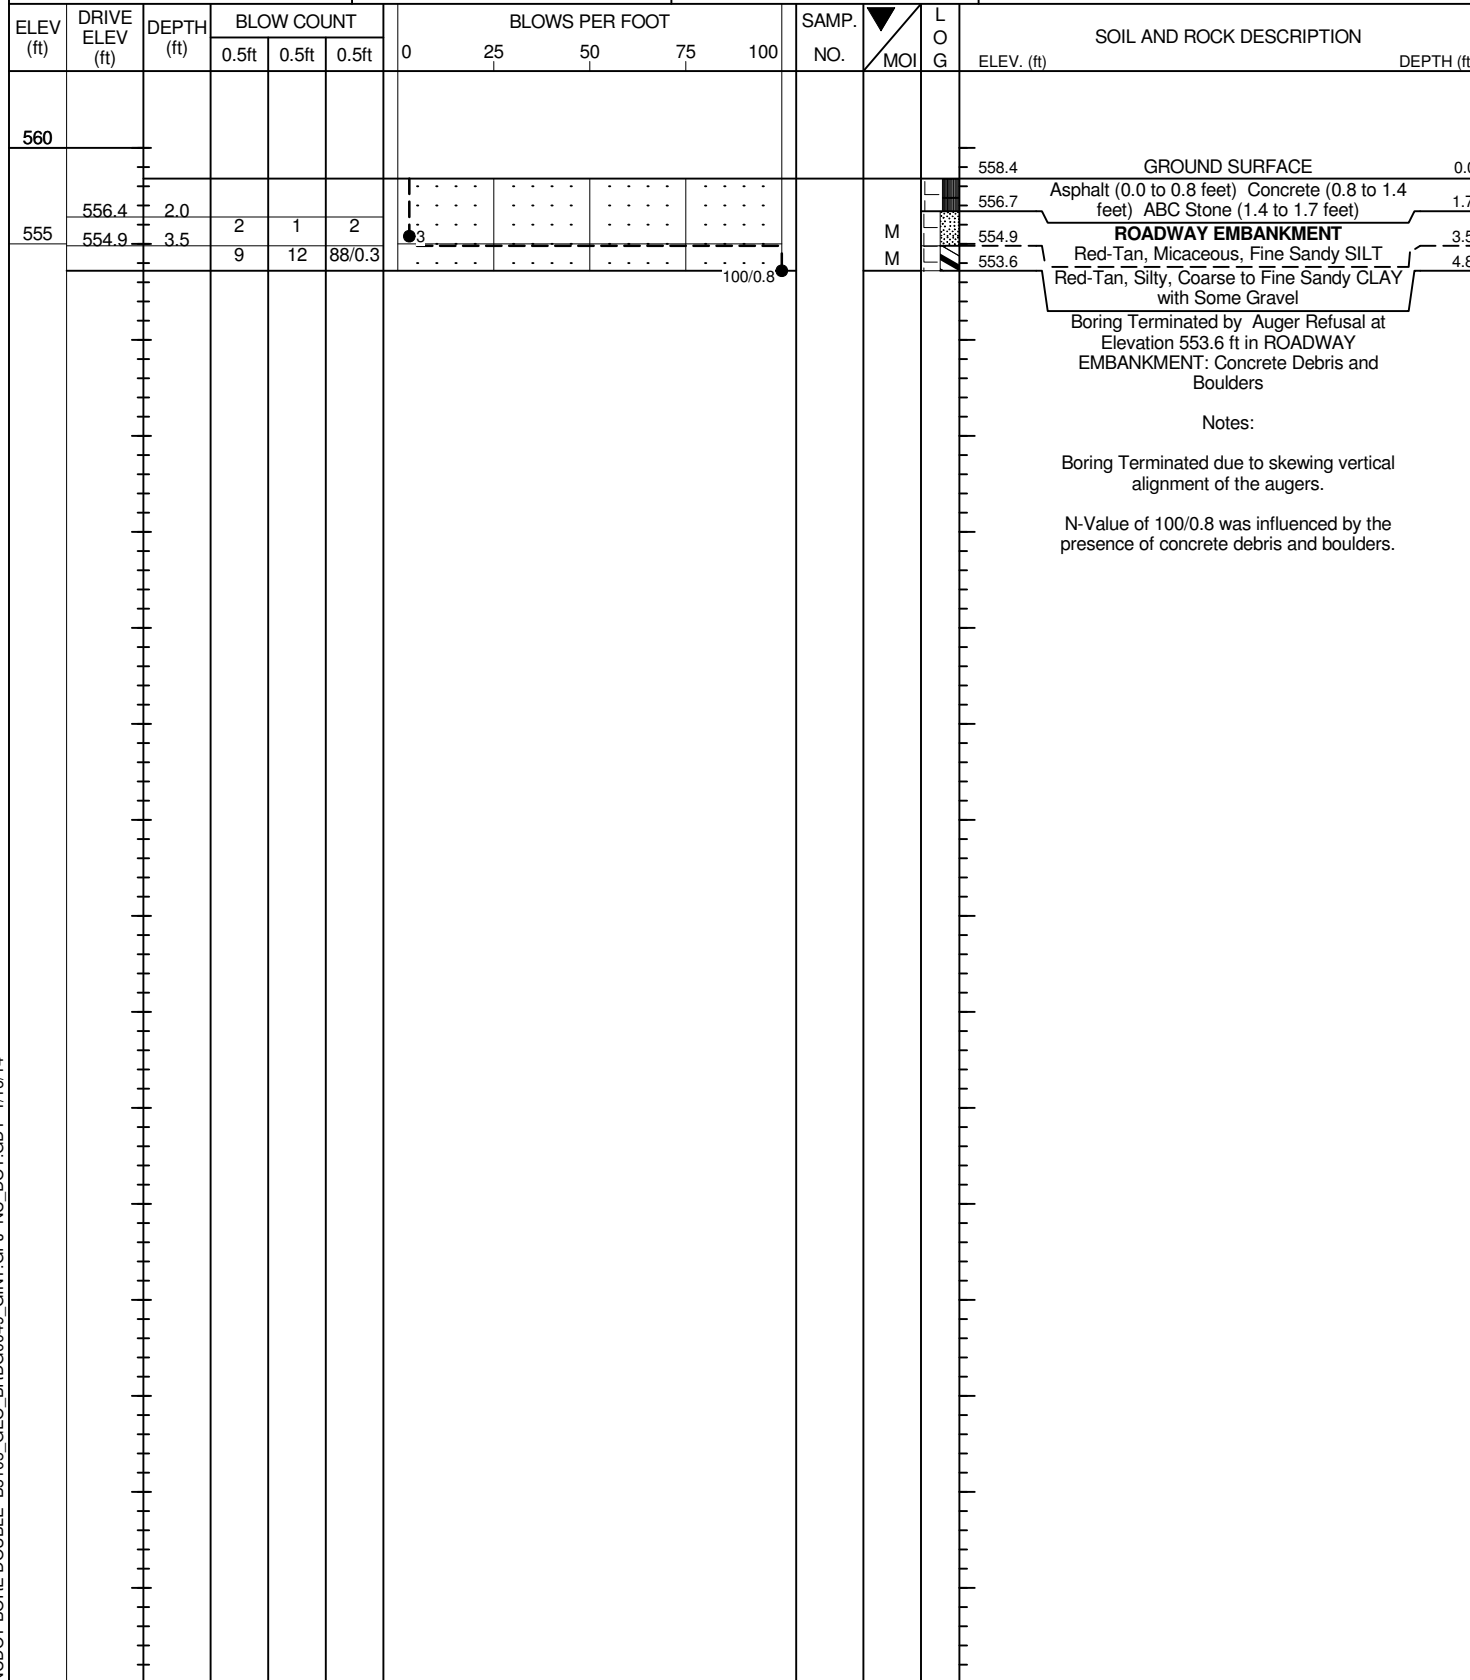

WBS 42180.1.1	TIP B-5105	COUNTY MECKLENBURG	GEOLOGIST Goodnight, D. J.
SITE DESCRIPTION Bridge No. 49 over Little Sugar Creek on SR 4982 (Lancaster Highway)			GROUND WTR (ft)
BORING NO. EB1-B	STATION 19+15	OFFSET 46 ft RT	ALIGNMENT -L-
COLLAR ELEV. 543.1 ft	TOTAL DEPTH 13.9 ft	NORTHING 489,124	EASTING 1,436,088
DRILL RIG/HAMMER EFF./DATE SOI8513 CME-550X 90% 08/21/2013		DRILL METHOD H.S. Augers	HAMMER TYPE Automatic
DRILLER White, J. F.	START DATE 10/14/13	COMP. DATE 10/14/13	SURFACE WATER DEPTH N/A

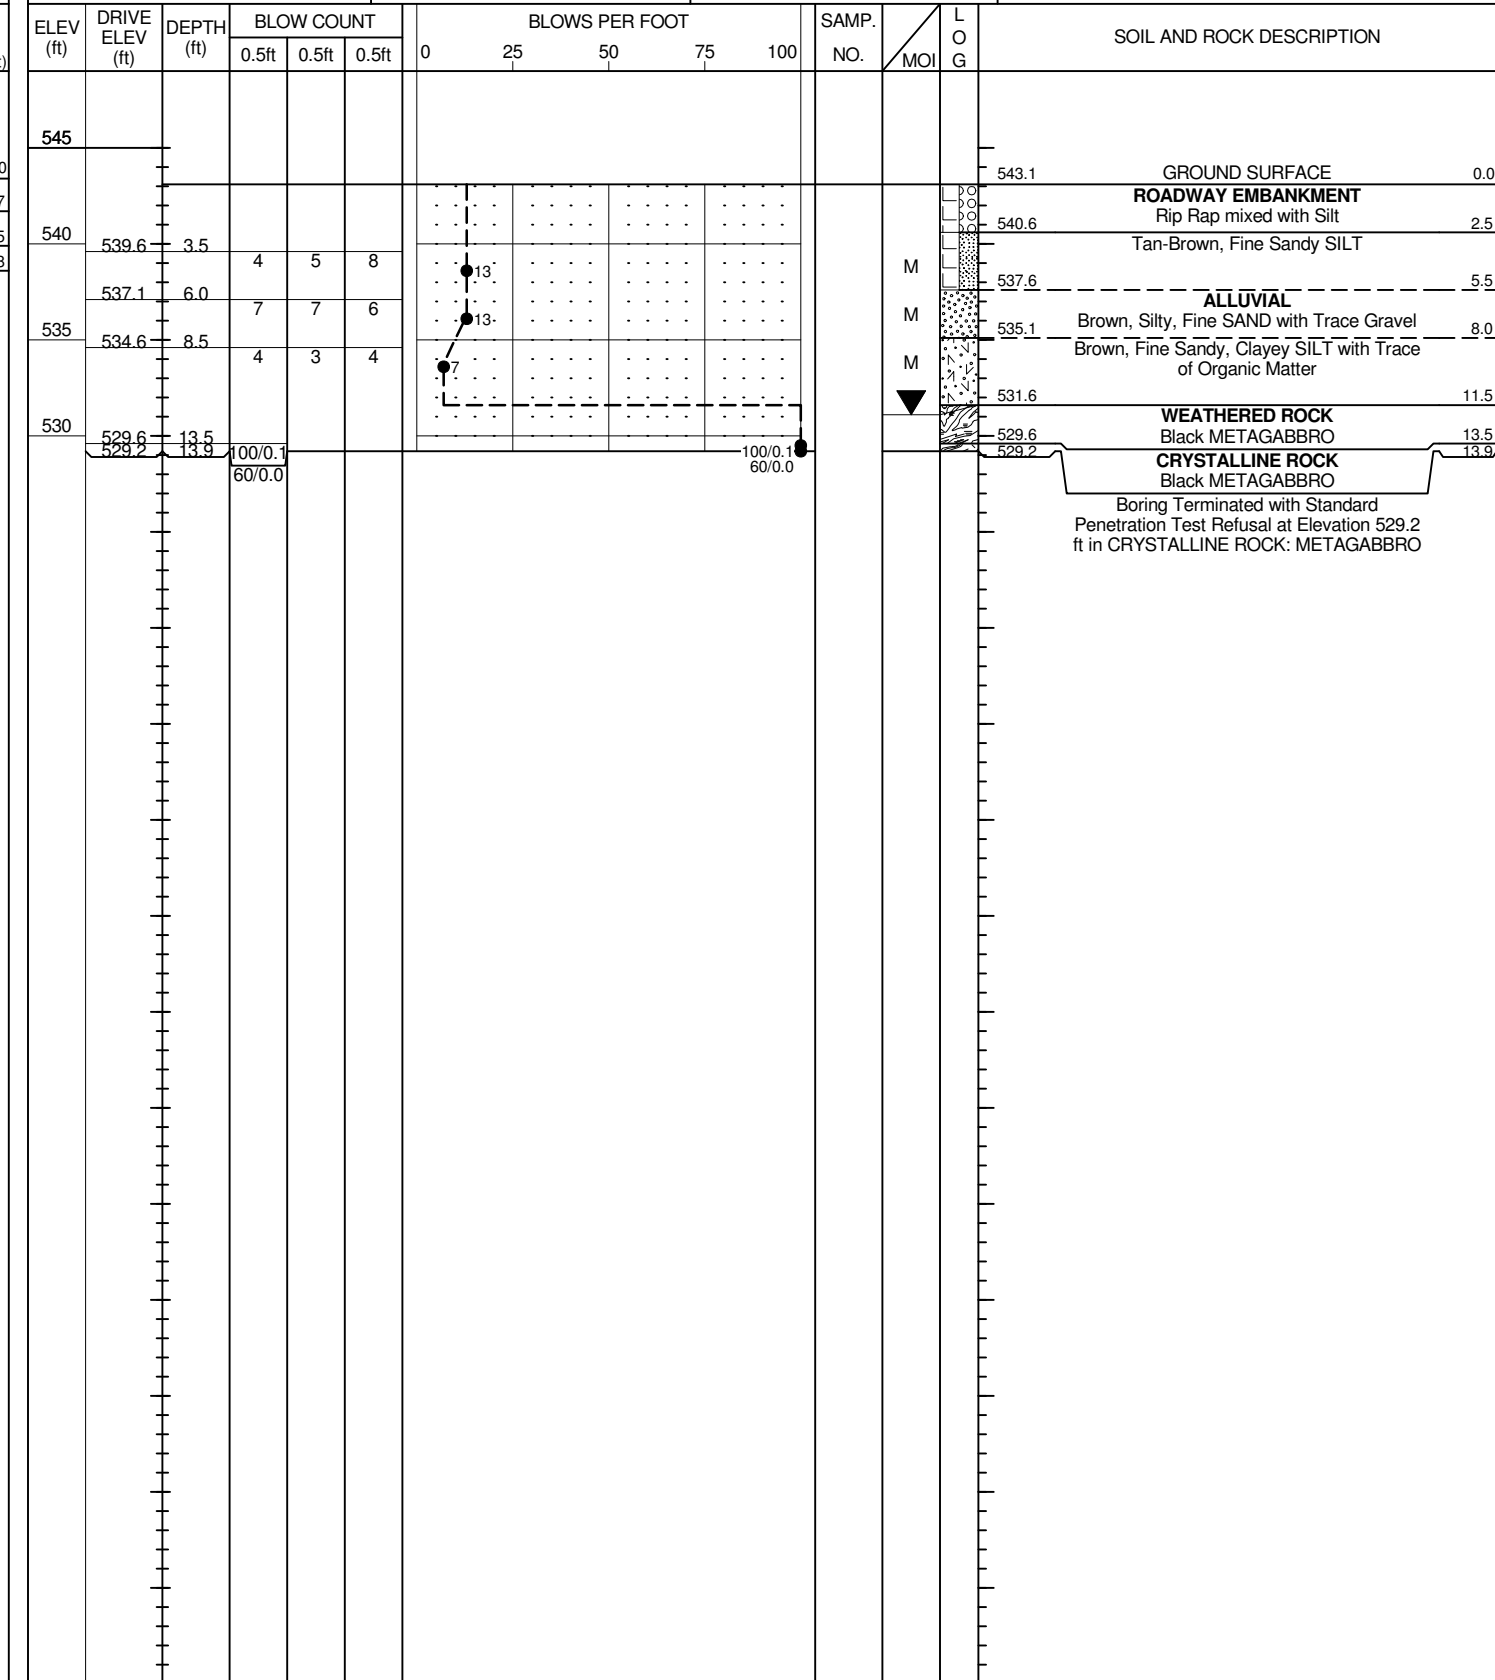

NCDOT BORE DOUBLE_B5105_GEO_BRDG0049_GINT.GPJ_NC_DOT.GDT_1/16/14



NCDOT GEOTECHNICAL ENGINEERING UNIT
BORELOG REPORT

WBS 42180.1.1		TIP B-5105		COUNTY MECKLENBURG		GEOLOGIST Goodnight, D. J.										
SITE DESCRIPTION Bridge No. 49 over Little Sugar Creek on SR 4982 (Lancaster Highway)							GROUND WTR (ft)									
BORING NO. B1-A		STATION 19+60		OFFSET 44 ft LT		ALIGNMENT -L-										
COLLAR ELEV. 544.2 ft		TOTAL DEPTH 29.6 ft		NORTHING 489,144		EASTING 1,435,989										
DRILL RIG/HAMMER EFF./DATE SOI8513 CME-550X 90% 08/21/2013			DRILL METHOD H.S. Augers/NQ Core			HAMMER TYPE Automatic										
DRILLER White, J. F.		START DATE 10/21/13		COMP. DATE 10/21/13		SURFACE WATER DEPTH N/A										
ELEV (ft)	DRIVE ELEV (ft)	DEPTH (ft)	BLOW COUNT			BLOWS PER FOOT					SAMP. NO.	LOG	SOIL AND ROCK DESCRIPTION	DEPTH (ft)		
			0.5ft	0.5ft	0.5ft	0	25	50	75	100						
545														544.2	GROUND SURFACE	0.0
	543.2	1.0		2	2	4						M	ALLUVIAL Tan-Brown, Silty, Fine SAND			
540	540.7	3.5		7	7	12						M				
	538.2	6.0		3	4	4						W	Brown, Fine Sandy SILT	5.9		
535	535.7	8.5		3	3	3						W	Tan-Brown, Silty, Fine SAND	8.0		
	531.7	12.5	60/0.1										WEATHERED ROCK Gray METAGABBRO	11.6		
530													CRYSTALLINE ROCK Gray METAGABBRO	14.7		
													Gray METAGABBRO			
525												RS-1	R1 = 7, R2 = 20, R3 = 10, R4 = 20, R5 = 4, RMR = 61			
													ROCK CLASS II, ROCK TYPE E			
520																
515																

Boring Terminated at Elevation 514.6 ft in CRYSTALLINE ROCK: METAGABBRO

Notes:
Boring was performed off of Proposed Bent Line due to Steep Creek Bank and Multiple Overhead Power Lines

NCDOT BORE DOUBLE B5105_GEO_BRD0049_GINT.GPJ NC_DOT.GDT 1/16/14



NCDOT GEOTECHNICAL ENGINEERING UNIT
CORE BORING REPORT

WBS 42180.1.1		TIP B-5105		COUNTY MECKLENBURG		GEOLOGIST Goodnight, D. J.	
SITE DESCRIPTION Bridge No. 49 over Little Sugar Creek on SR 4982 (Lancaster Highway)							GROUND WTR (ft)
BORING NO. B1-A		STATION 19+60		OFFSET 44 ft LT		ALIGNMENT -L-	
COLLAR ELEV. 544.2 ft		TOTAL DEPTH 29.6 ft		NORTHING 489,144		EASTING 1,435,989	
DRILL RIG/HAMMER EFF./DATE SOI8513 CME-550X 90% 08/21/2013			DRILL METHOD H.S. Augers/NQ Core			HAMMER TYPE Automatic	
DRILLER White, J. F.		START DATE 10/21/13		COMP. DATE 10/21/13		SURFACE WATER DEPTH N/A	
CORE SIZE NQ2				TOTAL RUN 17.0 ft			

ELEV (ft)	RUN ELEV (ft)	DEPTH (ft)	RUN (ft)	DRILL RATE (Min/ft)	RUN		SAMP. NO.	STRATA		LOG	DESCRIPTION AND REMARKS	DEPTH (ft)
					REC. (%)	ROD (%)		REC. (%)	ROD (%)			
531.7	531.6	12.6	2.0	N=60/0.1 1:42/1.0 2:50/1.0	(1.4)	(0.0)		(1.5)	(0.0)		Begin Coring @ 12.5 ft	12.5
530	529.6	14.6	5.0	1:25/1.0 1:20/1.0 1:19/1.0 1:18/1.0 1:29/1.0	(4.9)	(4.8)		(14.8)	(14.8)		CRYSTALLINE ROCK Moderate to Slight Weathering, Moderately Hard, Gray and Brown, METAGABBRO with Very Close Fracture Spacing	14.7
525	524.6	19.6	5.0	1:19/1.0 1:24/1.0 1:20/1.0 1:28/1.0 1:39/1.0	(5.0)	(5.0)	RS-1				Numerous Joints throughout Strata. Several Near Vertical Joints Fresh, Hard, Gray METAGABBRO with Close to Moderately Close Fracture Spacing	
520	519.6	24.6	5.0	1:20/1.0 1:34/1.0 1:27/1.0 1:40/1.0 1:41/1.0	100%	100%					5 Joints from 5 to 10 Degrees 3 Joints from 30 to 40 Degrees 1 Joint at 60 Degrees	
515	514.6	29.6									R1 = 7, R2 = 20, R3 = 10, R4 = 20, R5 = 4, RMR = 61 ROCK CLASS II, ROCK TYPE E	

Boring Terminated at Elevation 514.6 ft in CRYSTALLINE ROCK: METAGABBRO


Notes:
Boring was performed off of Proposed Bent Line due to Steep Creek Bank and Multiple Overhead Power Lines

NCDOT CORE SINGLE B5105_GEO_BRD0049_GINT.GPJ NC_DOT.GDT 1/16/14

CORE PHOTOGRAPHS

B1-A

BOXES 1 and 2: 12.6 - 29.6 FEET



NCDOT GEOTECHNICAL ENGINEERING UNIT
BORELOG REPORT

NCDOT GEOTECHNICAL ENGINEERING UNIT
CORE BORING REPORT

WBS 42180.1.1		TIP B-5105		COUNTY MECKLENBURG		GEOLOGIST Goodnight, D. J.									
SITE DESCRIPTION Bridge No. 49 over Little Sugar Creek on SR 4982 (Lancaster Highway)							GROUND WTR (ft)								
BORING NO. B1-B		STATION 19+65		OFFSET 19 ft RT		ALIGNMENT -L-									
COLLAR ELEV. 543.0 ft		TOTAL DEPTH 29.4 ft		NORTHING 489,165		EASTING 1,436,049									
DRILL RIG/HAMMER EFF./DATE SOI8513 CME-550X 90% 08/21/2013				DRILL METHOD H.S. Augers/NQ Core		HAMMER TYPE Automatic									
DRILLER White, J. F.		START DATE 10/18/13		COMP. DATE 10/18/13		SURFACE WATER DEPTH N/A									
ELEV (ft)	DRIVE ELEV (ft)	DEPTH (ft)	BLOW COUNT			BLOWS PER FOOT					SAMP. NO.	LOG	SOIL AND ROCK DESCRIPTION	DEPTH (ft)	
			0.5ft	0.5ft	0.5ft	0	25	50	75	100					
545															
	542.0	1.0	2	2	2									543.0	GROUND SURFACE
540	539.5	3.5	5	4	3							M		540.0	ALLUVIAL Brown, Fine Sandy SILT with Trace Gravel
	537.0	6.0										M		540.0	Brown, Silty, Fine SAND with a Trace of Organic Matter
535	534.5	8.5	2	2	3									535.0	Gray and Brown, Fine Sandy, Silty CLAY
	529.5	13.5										M		531.0	RESIDUAL
530	528.2	14.8	12	88/0.3										529.0	Gray, Silty, Coarse to Fine SAND
														528.2	WEATHERED ROCK Dark Gray METAGABBRO
525															CRYSTALLINE ROCK Gray METAGABBRO
520															
515														513.6	Boring Terminated at Elevation 513.6 ft in CRYSTALLINE ROCK: METAGABBRO
Notes: Boring was performed off of Proposed Bent Line due to Access Issues.															

WBS 42180.1.1		TIP B-5105		COUNTY MECKLENBURG		GEOLOGIST Goodnight, D. J.						
SITE DESCRIPTION Bridge No. 49 over Little Sugar Creek on SR 4982 (Lancaster Highway)							GROUND WTR (ft)					
BORING NO. B1-B		STATION 19+65		OFFSET 19 ft RT		ALIGNMENT -L-						
COLLAR ELEV. 543.0 ft		TOTAL DEPTH 29.4 ft		NORTHING 489,165		EASTING 1,436,049						
DRILL RIG/HAMMER EFF./DATE SOI8513 CME-550X 90% 08/21/2013				DRILL METHOD H.S. Augers/NQ Core		HAMMER TYPE Automatic						
DRILLER White, J. F.		START DATE 10/18/13		COMP. DATE 10/18/13		SURFACE WATER DEPTH N/A						
CORE SIZE NQ2				TOTAL RUN 14.6 ft								
ELEV (ft)	RUN ELEV (ft)	DEPTH (ft)	RUN (ft)	DRILL RATE (Min/ft)	RUN		SAMP. NO.	STRATA		LOG	DESCRIPTION AND REMARKS	DEPTH (ft)
					REC. (%)	RQD (%)		REC. (%)	RQD (%)			
528.2	528.2	14.8	4.6	N=60/0.0 0.37/0.6 1.18/1.0 1.17/1.0 1.25/1.0 1.40/1.0	(4.6)	(4.6)		(14.6)	(14.1)		Begin Coring @ 14.8 ft	14.8
525	523.6	19.4	5.0	1.11/1.0 1.12/1.0 1.10/1.0 1.21/1.0 1.38/1.0	(5.0)	(4.5)					Fresh, Hard, Gray METAGABBRO with Close to Moderately Close Fracture Spacing	
520	518.6	24.4	5.0	1.16/1.0 1.26/1.0 1.12/1.0 1.23/1.0 1.42/1.0	100%	90%					Some White Quartz Veins were present	
515	513.6	29.4			100%	100%					6 Joints from 5 to 10 degrees	
Boring Terminated at Elevation 513.6 ft in CRYSTALLINE ROCK: METAGABBRO												29.4
Notes: Boring was performed off of Proposed Bent Line due to Access Issues.												


NCDOT BORE DOUBLE B5105_GEO_BRD0049_GINT.GPJ NC_DOT.GDT 1/16/14

NCDOT CORE SINGLE B5105_GEO_BRD0049_GINT.GPJ NC_DOT.GDT 1/16/14

CORE PHOTOGRAPHS

B1-B

BOXES 1 and 2: 14.8 - 29.4 FEET





NCDOT GEOTECHNICAL ENGINEERING UNIT
BORELOG REPORT



NCDOT GEOTECHNICAL ENGINEERING UNIT
CORE BORING REPORT

WBS 42180.1.1		TIP B-5105		COUNTY MECKLENBURG		GEOLOGIST Goodnight, D. J.										
SITE DESCRIPTION Bridge No. 49 over Little Sugar Creek on SR 4982 (Lancaster Highway)							GROUND WTR (ft)									
BORING NO. B2-A		STATION 20+51		OFFSET 7 ft LT		ALIGNMENT -L-										
COLLAR ELEV. 536.1 ft		TOTAL DEPTH 21.9 ft		NORTHING 489,241		EASTING 1,436,001										
DRILL RIG/HAMMER EFF./DATE SOI8513 CME-550X 90% 08/21/2013				DRILL METHOD H.S. Augers/NQ Core		HAMMER TYPE Automatic										
DRILLER White, J. F.		START DATE 10/16/13		COMP. DATE 10/17/13		SURFACE WATER DEPTH N/A										
ELEV (ft)	DRIVE ELEV (ft)	DEPTH (ft)	BLOW COUNT			BLOWS PER FOOT					SAMP. NO.	LOG	SOIL AND ROCK DESCRIPTION	DEPTH (ft)		
			0.5ft	0.5ft	0.5ft	0	25	50	75	100						
540																
535	535.1	1.0	3	3	2									536.1	GROUND SURFACE	0.0
	532.6	3.5	WOH	WOH	1									533.1	ALLUVIAL Tan-Brown, Silty, Coarse to Fine SAND with Little Gravel and Trace of Organic Matter	3.0
530	530.1	6.0												530.6	Brown and Gray, Fine Sandy, Clayey SILT with Some Gravel	5.5
	527.6	8.5												528.1	Gray, Silty, Fine SAND with Some Gravel	8.0
525	524.2	11.9												524.2	RESIDUAL Dark Gray, Silty, Coarse to Fine SAND with Little Rock Fragments	11.9
520															CRYSTALLINE ROCK Dark Gray and White METAGABBRO	
515														514.2		21.9
Boring Terminated at Elevation 514.2 ft in CRYSTALLINE ROCK: METAGABBRO																
Notes: Boring was performed off of Proposed Bent Line due to Configuration of Bridge Superstructure.																

NCDOT BORE DOUBLE B5105_GEO_BRDG0049_GINT.GPJ NC_DOT.GDT 1/16/14


WBS 42180.1.1		TIP B-5105		COUNTY MECKLENBURG		GEOLOGIST Goodnight, D. J.						
SITE DESCRIPTION Bridge No. 49 over Little Sugar Creek on SR 4982 (Lancaster Highway)							GROUND WTR (ft)					
BORING NO. B2-A		STATION 20+51		OFFSET 7 ft LT		ALIGNMENT -L-						
COLLAR ELEV. 536.1 ft		TOTAL DEPTH 21.9 ft		NORTHING 489,241		EASTING 1,436,001						
DRILL RIG/HAMMER EFF./DATE SOI8513 CME-550X 90% 08/21/2013				DRILL METHOD H.S. Augers/NQ Core		HAMMER TYPE Automatic						
DRILLER White, J. F.		START DATE 10/16/13		COMP. DATE 10/17/13		SURFACE WATER DEPTH N/A						
ELEV (ft)	RUN ELEV (ft)	DEPTH (ft)	RUN (ft)	DRILL RATE (Min/ft)	TOTAL RUN		SAMP. NO.	STRATA		LOG	DESCRIPTION AND REMARKS	DEPTH (ft)
					REC. (ft)	RQD (%)		REC. (ft)	RQD (%)			
524.2	524.2	11.9	5.0	N=60/0.0 1.48/1.0 1.45/1.0 1.50/1.0 1.55/1.0 2.06/1.0	(4.9) 98%	(4.6) 92%		(9.8) 98%	(9.3) 93%		Begin Coring @ 11.9 ft CRYSTALLINE ROCK Very Slight Weathering to Fresh, Hard, Dark Gray and White METAGABBRO with Close to Moderately Close Fracture Spacing	11.9
520	519.2	16.9	5.0	1.40/1.0 1.39/1.0 1.29/1.0 1.34/1.0 1.35/1.0	(4.9) 98%	(4.7) 94%					Several White Quartz Veins were present 1 Near Vertical Joint 3 Joints at 40 to 50 Degrees 3 Joints at 10 to 20 Degrees	
515	514.2	21.9									Boring Terminated at Elevation 514.2 ft in CRYSTALLINE ROCK: METAGABBRO	21.9
Notes: Boring was performed off of Proposed Bent Line due to Configuration of Bridge Superstructure.												

NCDOT CORE SINGLE B5105_GEO_BRDG0049_GINT.GPJ NC_DOT.GDT 1/16/14

CORE PHOTOGRAPHS

B2-A

BOX 1: 11.9 - 21.9 FEET





NCDOT GEOTECHNICAL ENGINEERING UNIT BORELOG REPORT

WBS 42180.1.1		TIP B-5105		COUNTY MECKLENBURG		GEOLOGIST Goodnight, D. J.								
SITE DESCRIPTION Bridge No. 49 over Little Sugar Creek on SR 4982 (Lancaster Highway)							GROUND WTR (ft)							
BORING NO. B2-B		STATION 20+50		OFFSET 30 ft RT		ALIGNMENT -L-								
COLLAR ELEV. 543.6 ft		TOTAL DEPTH 34.3 ft		NORTHING 489,250		EASTING 1,436,037								
DRILL RIG/HAMMER EFF./DATE SOI8513 CME-550X 90% 08/21/2013				DRILL METHOD H.S. Augers/NQ Core		HAMMER TYPE Automatic								
DRILLER White, J. F.		START DATE 10/17/13		COMP. DATE 10/17/13		SURFACE WATER DEPTH N/A								
ELEV (ft)	DRIVE ELEV (ft)	DEPTH (ft)	BLOW COUNT			BLOWS PER FOOT				SAMP. NO.	LOG	SOIL AND ROCK DESCRIPTION	DEPTH (ft)	
			0.5ft	0.5ft	0.5ft	0	25	50	75					100
545												GROUND SURFACE	0.0	
540	542.6	1.0	2	3	3						M	ALLUVIAL Tan and Brown, Silty, Fine SAND with Trace of Organic Matter and Little Gravel		
535	537.6	6.0	3	2	3						M	Brown, Fine Sandy SILT with Some Roots	5.5	
530	535.1	8.5	3	3	2						M	Tan to Light Gray and Tan, Silty, Fine SAND with Trace of Gravel	8.0	
525	530.1	13.5	3	3	6						W			
520	526.8	16.8	60/0.0			60/0.0						W	CRYSTALLINE ROCK Gray and White METAGABBRO R1 = 7, R2 = 17, R3 = 10, R4 = 20, R5 = 4, RMR = 58 ROCK CLASS III, ROCK TYPE E	16.8
515														
510														
Boring Terminated at Elevation 509.3 ft in CRYSTALLINE ROCK: METAGABBRO													34.3	
Notes: Boring was performed off of Proposed Bent Line due to Access Issues.														

NCDOT BORE DOUBLE B5105_GEO_BRDG0049_GINT.GPJ_NC_DOT.GDT 1/16/14



NCDOT GEOTECHNICAL ENGINEERING UNIT CORE BORING REPORT


WBS 42180.1.1		TIP B-5105		COUNTY MECKLENBURG		GEOLOGIST Goodnight, D. J.					
SITE DESCRIPTION Bridge No. 49 over Little Sugar Creek on SR 4982 (Lancaster Highway)							GROUND WTR (ft)				
BORING NO. B2-B		STATION 20+50		OFFSET 30 ft RT		ALIGNMENT -L-					
COLLAR ELEV. 543.6 ft		TOTAL DEPTH 34.3 ft		NORTHING 489,250		EASTING 1,436,037					
DRILL RIG/HAMMER EFF./DATE SOI8513 CME-550X 90% 08/21/2013				DRILL METHOD H.S. Augers/NQ Core		HAMMER TYPE Automatic					
DRILLER White, J. F.		START DATE 10/17/13		COMP. DATE 10/17/13		SURFACE WATER DEPTH N/A					
ELEV (ft)	RUN ELEV (ft)	DEPTH (ft)	RUN (ft)	DRILL RATE (Min/ft)	RUN		STRATA		LOG	DESCRIPTION AND REMARKS	DEPTH (ft)
					REC. (%)	ROD (%)	REC. (%)	ROD (%)			
526.8											
525	526.8	16.8	2.8	N=60/0.0 0.58/0.8	(2.2) 79%	(1.9) 68%	(16.4) 94%	(15.5) 89%		Begin Coring @ 16.8 ft CRYSTALLINE ROCK Very Slight Weathering to Fresh, Hard, Dark Gray and White METAGABBRO with Close to Moderately Close Fracture Spacing	16.8
	524.0	19.6	5.0	1.20/1.0 1.52/1.0	(4.5) 90%	(3.9) 78%				Some White Quartz Veins were present	
520									RS-2	3 Joints at 20 to 30 Degrees 3 Joints at 40 to 50 Degrees Several Healed Joints at 45 to 60 Degrees 1 Healed Near Vertical Joint	
	519.0	24.6	5.0	1.10/1.0 1.21/1.0 1.36/1.0 1.41/1.0 1.52/1.0	(5.0) 100%	(5.0) 100%				Core Loss from 18.7 to 19.3 feet and 19.8 to 20.3 feet indicating presence of Weathered Rock.	
515											
	514.0	29.6	4.7	1.10/1.0 1.18/1.0 1.15/1.0 1.18/1.0 0.58/0.7	(4.7) 100%	(4.7) 100%				R1 = 7, R2 = 17, R3 = 10, R4 = 20, R5 = 4, RMR = 58 ROCK CLASS III, ROCK TYPE E	
510	509.3	34.3								Boring Terminated at Elevation 509.3 ft in CRYSTALLINE ROCK: METAGABBRO	34.3
Notes: Boring was performed off of Proposed Bent Line due to Access Issues.											

NCDOT CORE SINGLE B5105_GEO_BRDG0049_GINT.GPJ_NC_DOT.GDT 1/16/14

CORE PHOTOGRAPHS

B2-B

BOXES 1 and 2: 16.8 - 34.3 FEET





NCDOT GEOTECHNICAL ENGINEERING UNIT

BORELOG REPORT

WBS 42180.1.1	TIP B-5105	COUNTY MECKLENBURG	GEOLOGIST Goodnight, D. J.
SITE DESCRIPTION Bridge No. 49 over Little Sugar Creek on SR 4982 (Lancaster Highway)			GROUND WTR (ft)
BORING NO. EB2-A	STATION 20+98	OFFSET 5 ft LT	ALIGNMENT -L-
COLLAR ELEV. 558.5 ft	TOTAL DEPTH 25.3 ft	NORTHING 489,287	EASTING 1,435,991
DRILL RIG/HAMMER EFF./DATE SOI8513 CME-550X 90% 08/21/2013		DRILL METHOD Mud Rotary	HAMMER TYPE Automatic
DRILLER White, J. F.	START DATE 10/15/13	COMP. DATE 10/15/13	SURFACE WATER DEPTH N/A

ELEV (ft)	DRIVE ELEV (ft)	DEPTH (ft)	BLOW COUNT			BLOWS PER FOOT					SAMP. NO.	LOG	SOIL AND ROCK DESCRIPTION	DEPTH (ft)		
			0.5ft	0.5ft	0.5ft	0	25	50	75	100						
560														558.5	GROUND SURFACE	0.0
														555.9	Asphalt (0.0 to 2.0 feet) Concrete (2.0 to 2.6 feet)	2.6
555	555.8	2.7													ROADWAY EMBANKMENT	
	554.3	4.2	1	WOH	2										Red-Tan, Coarse to Fine Sandy SILT with a Trace of Gravel	
	552.5	6.0	WOH	2	1											
550	550.0	8.5	WOH	WOH	1											
545	545.0	13.5	WOH	WOH	3											
540	540.0	18.5	WOH	1	3										ALLUVIAL	
															Gray-Brown, Silty, Clayey, Coarse to Fine SAND with a Trace of Organic Matter	
535	535.0	23.5													RESIDUAL	
	533.2	25.3	21	19	81/0.5										Tan, Silty, Coarse to Fine SAND	24.5
															WEATHERED ROCK	
															Tan METADIORITE	25.3
															Boring Terminated with Standard Penetration Test Refusal at Elevation 533.2 ft on CRYSTALLINE ROCK: METADIORITE	

WBS 42180.1.1	TIP B-5105	COUNTY MECKLENBURG	GEOLOGIST Goodnight, D. J.
SITE DESCRIPTION Bridge No. 49 over Little Sugar Creek on SR 4982 (Lancaster Highway)			GROUND WTR (ft)
BORING NO. EB2-B	STATION 21+02	OFFSET 15 ft RT	ALIGNMENT -L-
COLLAR ELEV. 558.4 ft	TOTAL DEPTH 28.5 ft	NORTHING 489,296	EASTING 1,436,009
DRILL RIG/HAMMER EFF./DATE SOI8513 CME-550X 90% 08/21/2013		DRILL METHOD Mud Rotary	HAMMER TYPE Automatic
DRILLER White, J. F.	START DATE 10/16/13	COMP. DATE 10/16/13	SURFACE WATER DEPTH N/A

ELEV (ft)	DRIVE ELEV (ft)	DEPTH (ft)	BLOW COUNT			BLOWS PER FOOT					SAMP. NO.	LOG	SOIL AND ROCK DESCRIPTION	DEPTH (ft)		
			0.5ft	0.5ft	0.5ft	0	25	50	75	100						
560														558.4	GROUND SURFACE	0.0
														556.8	Asphalt (0.0 to 1.6 feet)	1.6
555	556.3	2.1													ROADWAY EMBANKMENT	
	554.8	3.6	3	1	2										Brown and Gray, Fine to Coarse SAND with Some Gravel and Clay Lenses	3.6
	552.4	6.0	WOH	WOH	1										Red-Tan and Gray, Coarse to Fine Sandy CLAY with Some Gravel	
550	549.9	8.5	WOH	WOH	2										Tan-Red, Coarse to Fine Sandy SILT	8.0
545	544.9	13.5	WOH	1	2										Tan-Red, Silty, Coarse to Fine Sandy CLAY	12.0
540	539.9	18.5	1	2	3											
535	534.9	23.5	4	4	8										RESIDUAL	
															Brown, Coarse to Fine Sandy SILT	21.3
															WEATHERED ROCK	
															Black METAGABBRO	25.7
530	529.9	28.5													Boring Terminated with Standard Penetration Test Refusal at Elevation 529.9 ft on CRYSTALLINE ROCK: METAGABBRO	

NCDOT BORE DOUBLE B5105_GEO_BRDG0049_GINT.GPJ NC_DOT.GDT 1/16/14

SITE PHOTOGRAPHS



View Looking Upstation along -L- from End Bent 1



Profile of Bridge Looking Downstation from End Bent 2