


CLTWater STANDARD DETAILS

0400DEL_P30

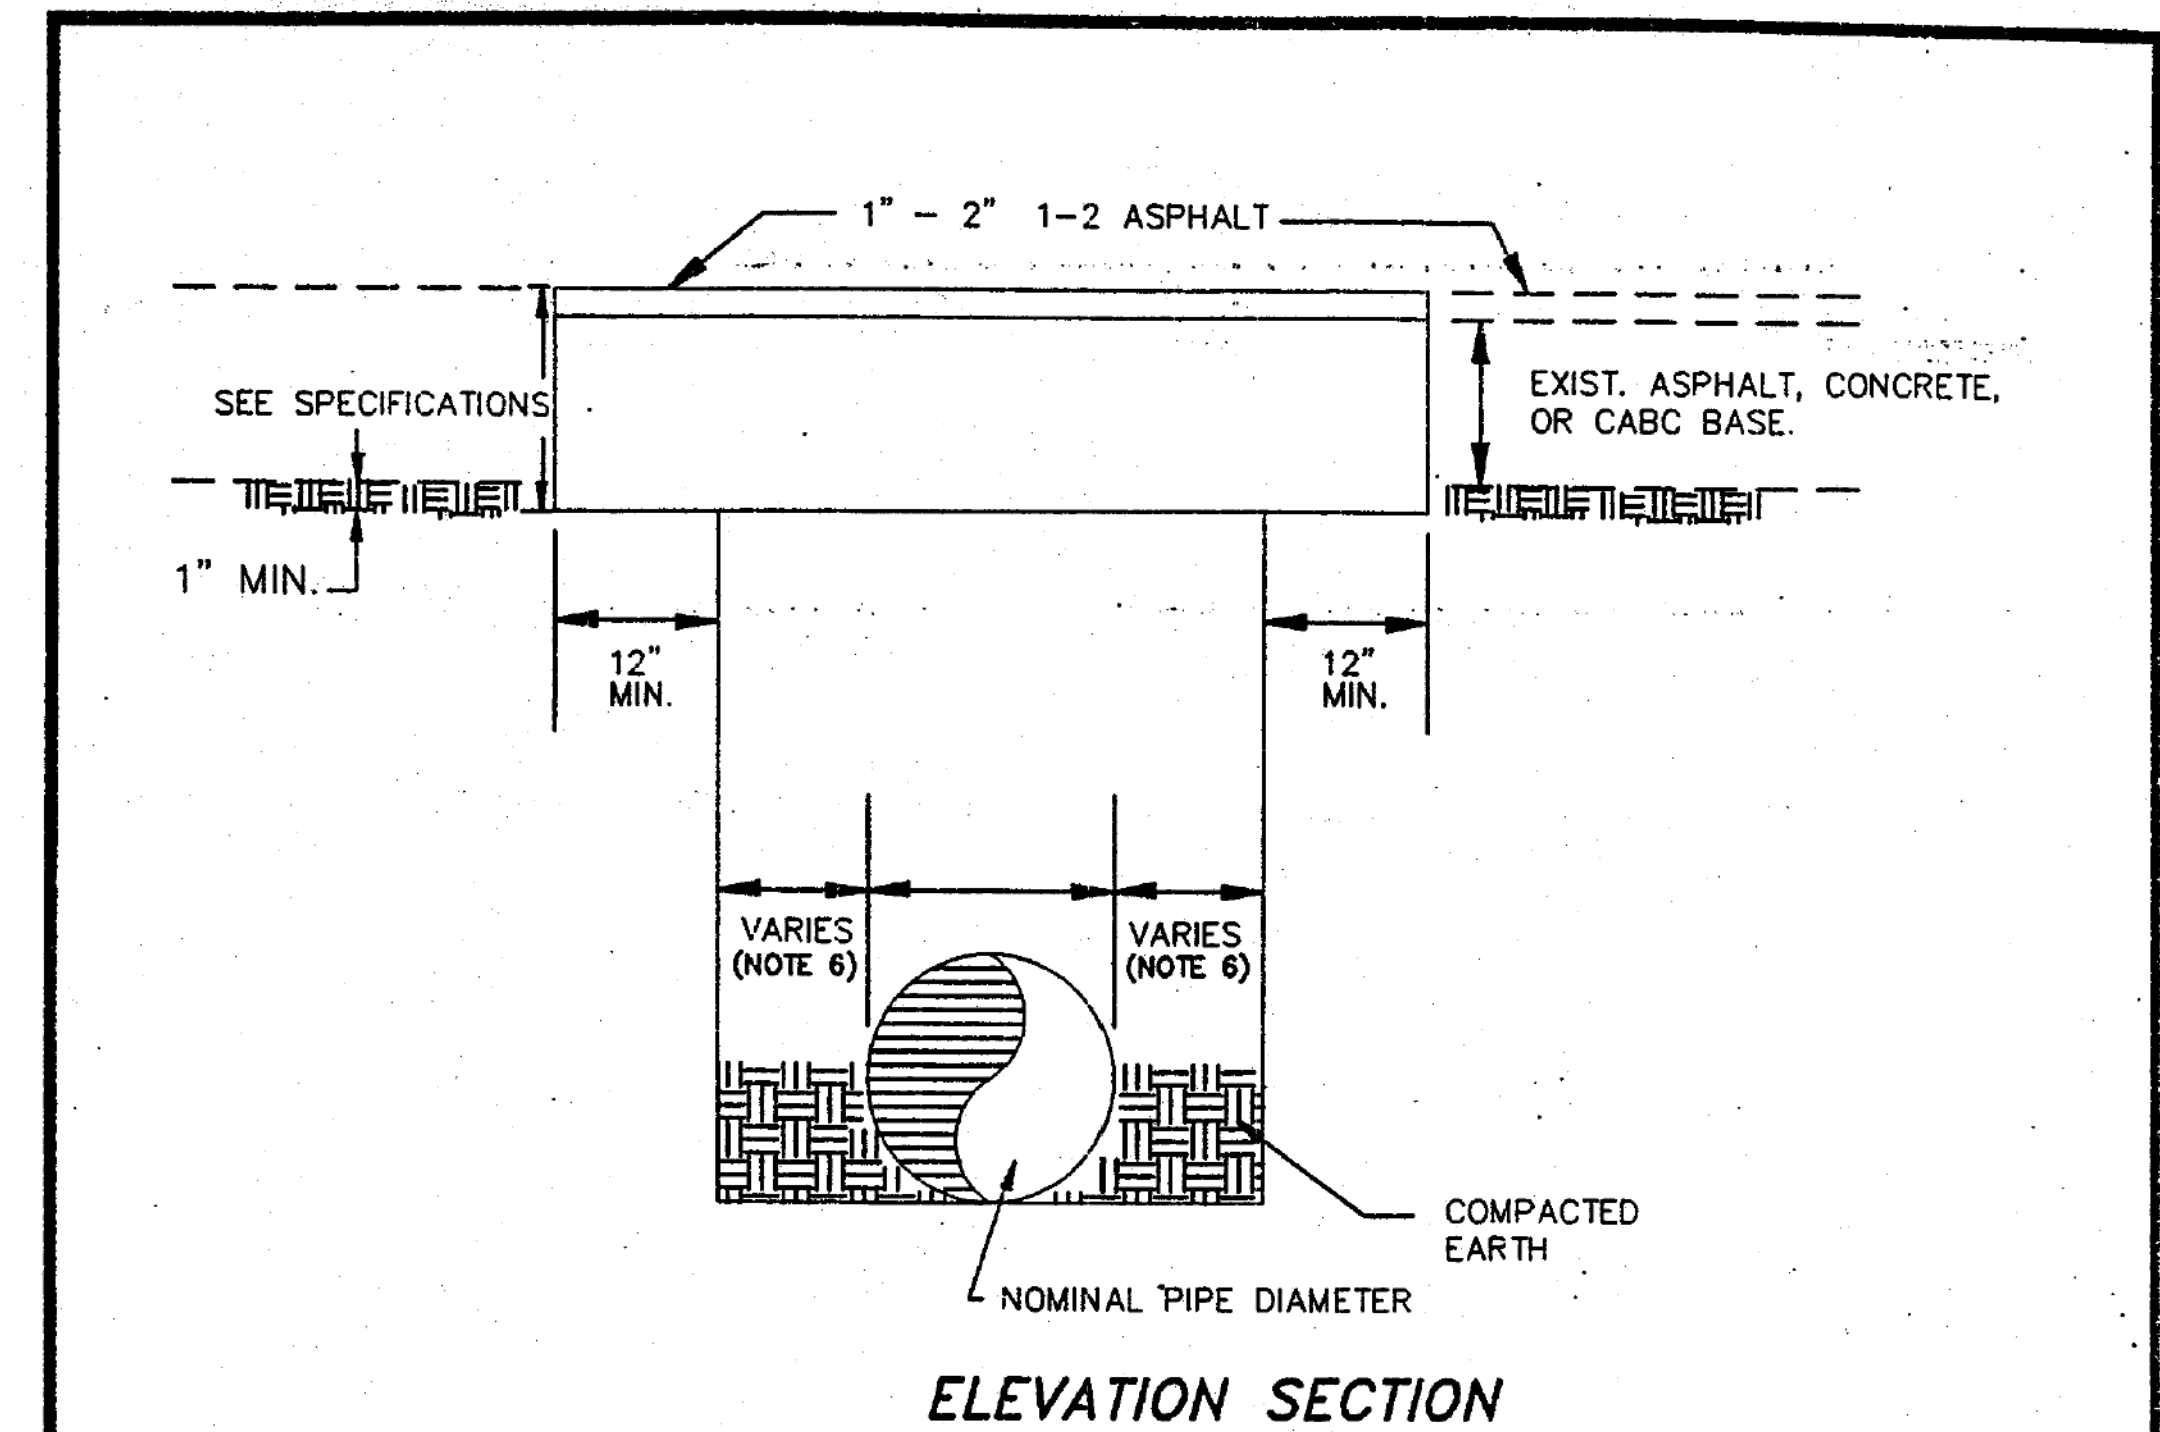

ELEVATION SECTION

NOTES:

1. ALL CONCRETE AND ASPHALT PAVEMENT, INCLUDING DRIVEWAYS, TO BE CUT WITH A SAW.
2. WHERE CONCRETE PAVEMENT IS OVERLAID WITH ASPHALT H- BINDER MAY BE SUBSTITUTED FOR CONCRETE, AS A BASE MATERIAL, WITH THE APPROVAL OF THE CONTROLLING AGENCY.
3. ALL PAVEMENT REPAIRS ARE SUBJECT TO APPROVAL BY CITY OF CHARLOTTE DOT OR N.C. DOT AS APPLICABLE.
4. 12-INCH MIN. MINIMUM CUT OUTSIDE TRENCH IS ALSO REQUIRED FOR SLOPED TRENCH WALLS.
5. SHORING REQUIRED IN ACCORDANCE WITH OSHA STANDARDS PART 1926, SUBPART P.
6. SEE DETAILED SPECIFICATIONS FOR TRENCH WIDTH.

CHARLOTTE-MECKLENBURG UTILITY DEPARTMENT ENGINEERING DIVISION CHARLOTTE, NORTH CAROLINA											
STANDARD DETAIL WATER		PAVEMENT REPAIR DETAIL									
Job No.	File No.	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td colspan="2" style="text-align: center;">Scales</td> </tr> <tr> <td>PLAN</td> <td style="text-align: center;">NTS</td> </tr> <tr> <td>PROFILE</td> <td>Hor. _____ Vert. _____</td> </tr> <tr> <td>As Built</td> <td>Date _____</td> </tr> </table>		Scales		PLAN	NTS	PROFILE	Hor. _____ Vert. _____	As Built	Date _____
Scales											
PLAN	NTS										
PROFILE	Hor. _____ Vert. _____										
As Built	Date _____										
No. Date By											
Surveyed By	Designed By	Drawn By	Project-Eng								
		Approved By	Date								
		Sheet 9 Of									

07/27/95

July 27, 1995

XIV - 60

Water Specifications/Details (SD)