




- NOTES:**
- MILL NOTCH TO KEY-IN S9.5C FROM -L- STA 11+32.00 TO 11+82.00
 - REMOVE EXISTING ASPHALT PAVEMENT TO EXISTING SUBGRADE EXCEPT WHERE NOTED.
 - REMOVE EXISTING ASPHALT PAVEMENT TO THE TOP OF EXISTING ABC AND REPLACE WITH 119.0C PRIOR TO PLACING THE OVERLAY FROM -L- STA 27+50 TO 32+50.
 - PAVEMENT EDGE SLOPES ARE 1:1 UNLESS OTHERWISE INDICATED
 - REFER TO TMP SHEETS FOR TEMPORARY ASPHALT PAVEMENT WIDTHS
 - MILL ASPHALT PAVEMENT 3" TO 0" FROM -L- STA 11+82.00 TO 14+72.00 AND FROM -L- STA 18+11.00 TO 19+11.00
 - MILL ASPHALT PAVEMENT 3" TO 0" FROM -L- STA 51+67.00 TO 52+32.00




P.O. BOX 33068 • RALEIGH, N.C. 27636-3068


PROJECT REFERENCE NO. U-3315	SHEET NO. 2A-1
R/W SHEET NO.	
ROADWAY ENGINEER 6/11/2015	PAVEMENT DESIGN ENGINEER 6/11/2015

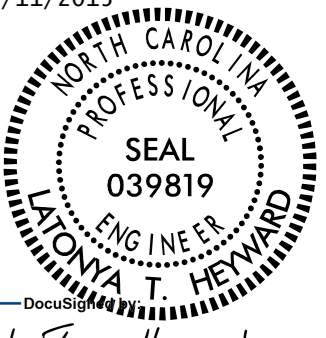
REVISIONS

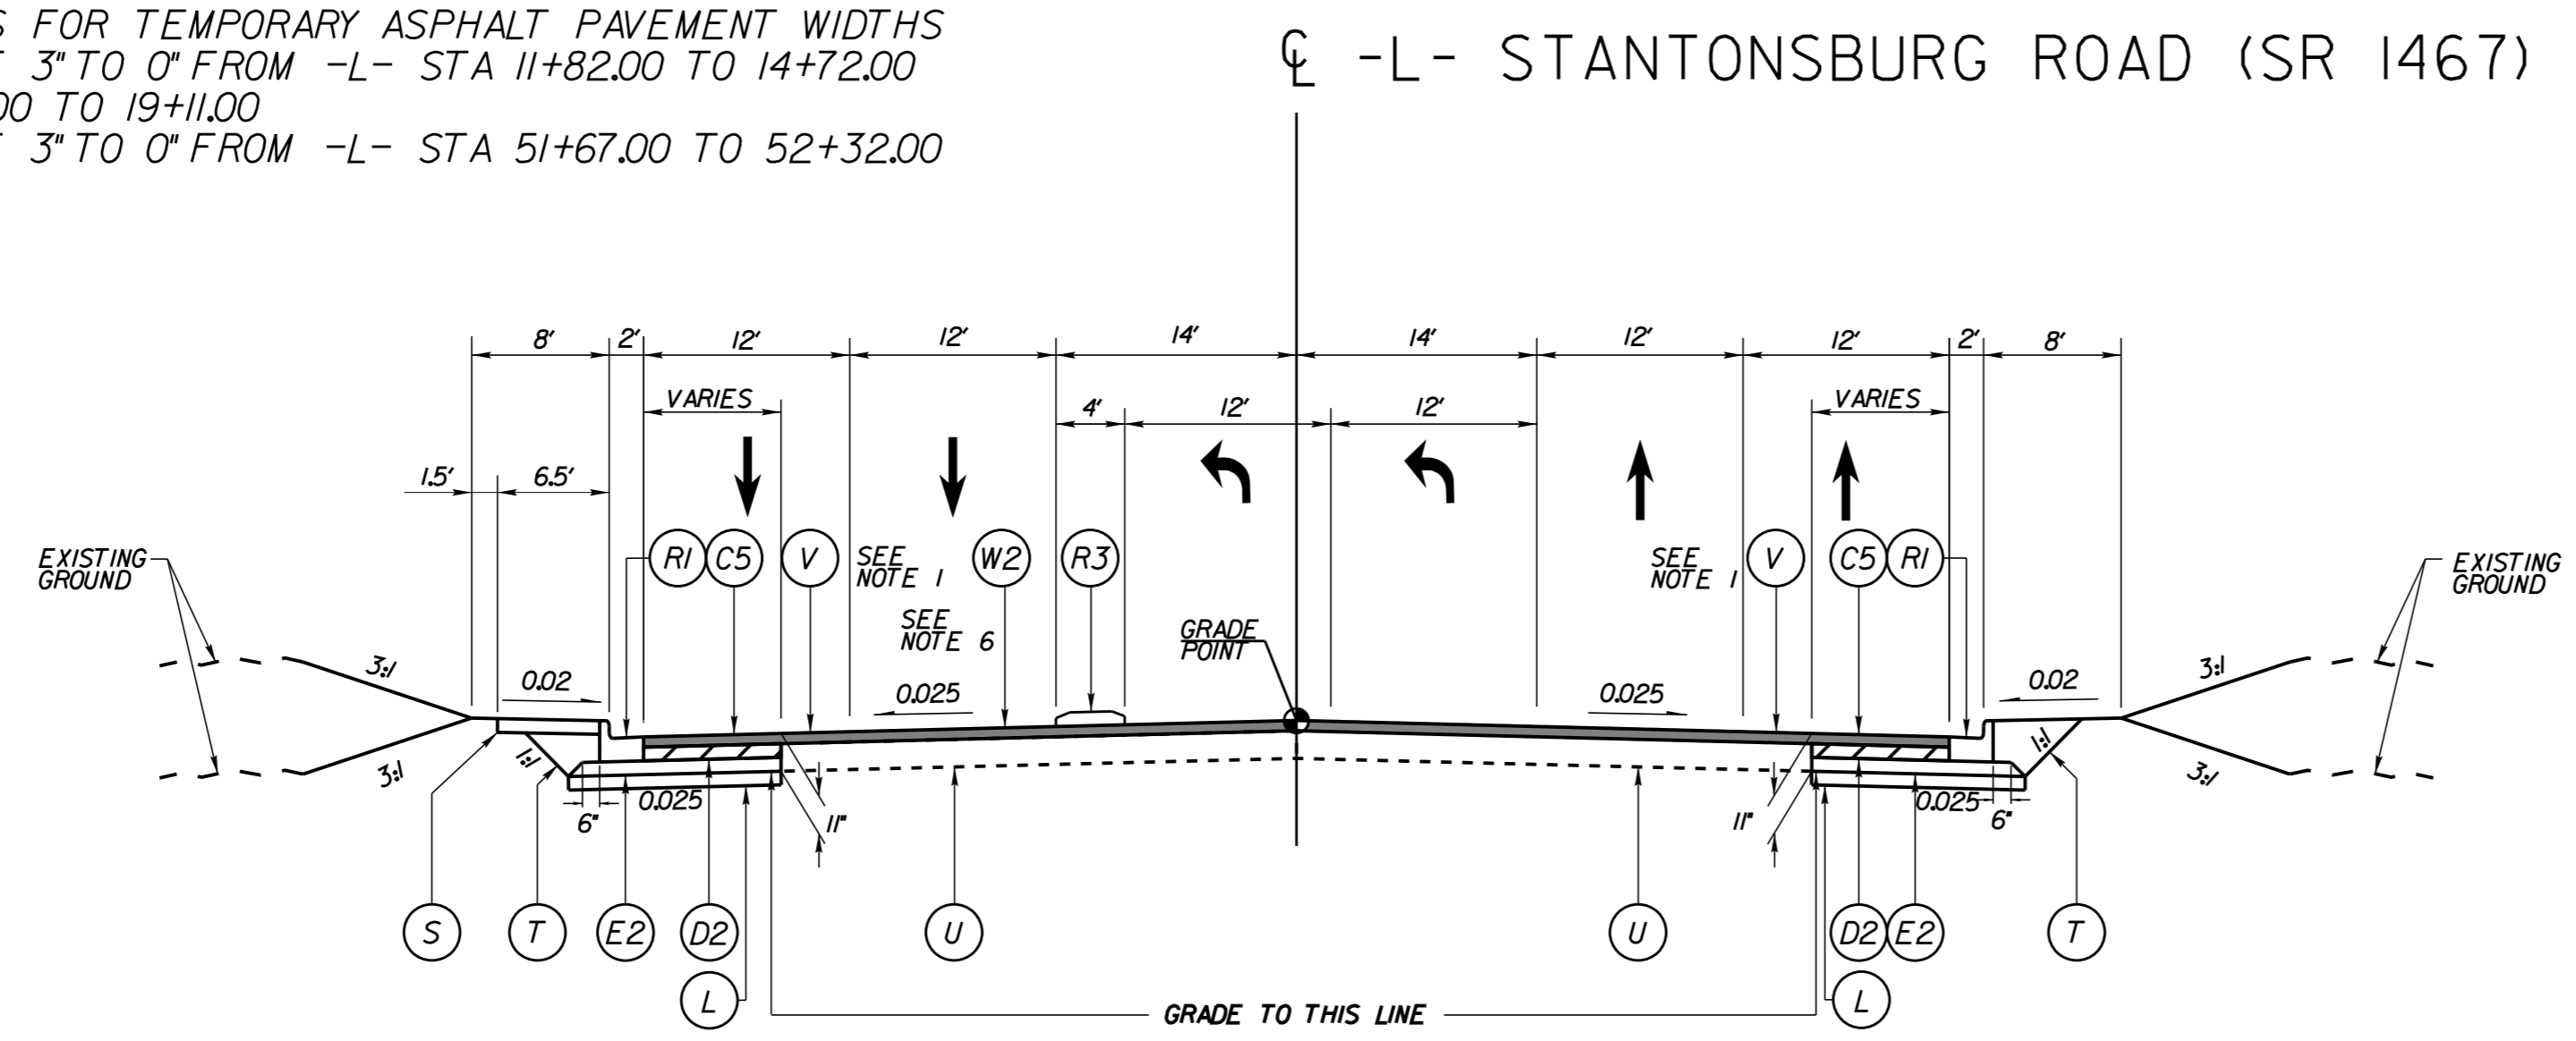


TYPICAL SECTION NO. 1
-L- STA 11+32.00 TO STA 20+34.32

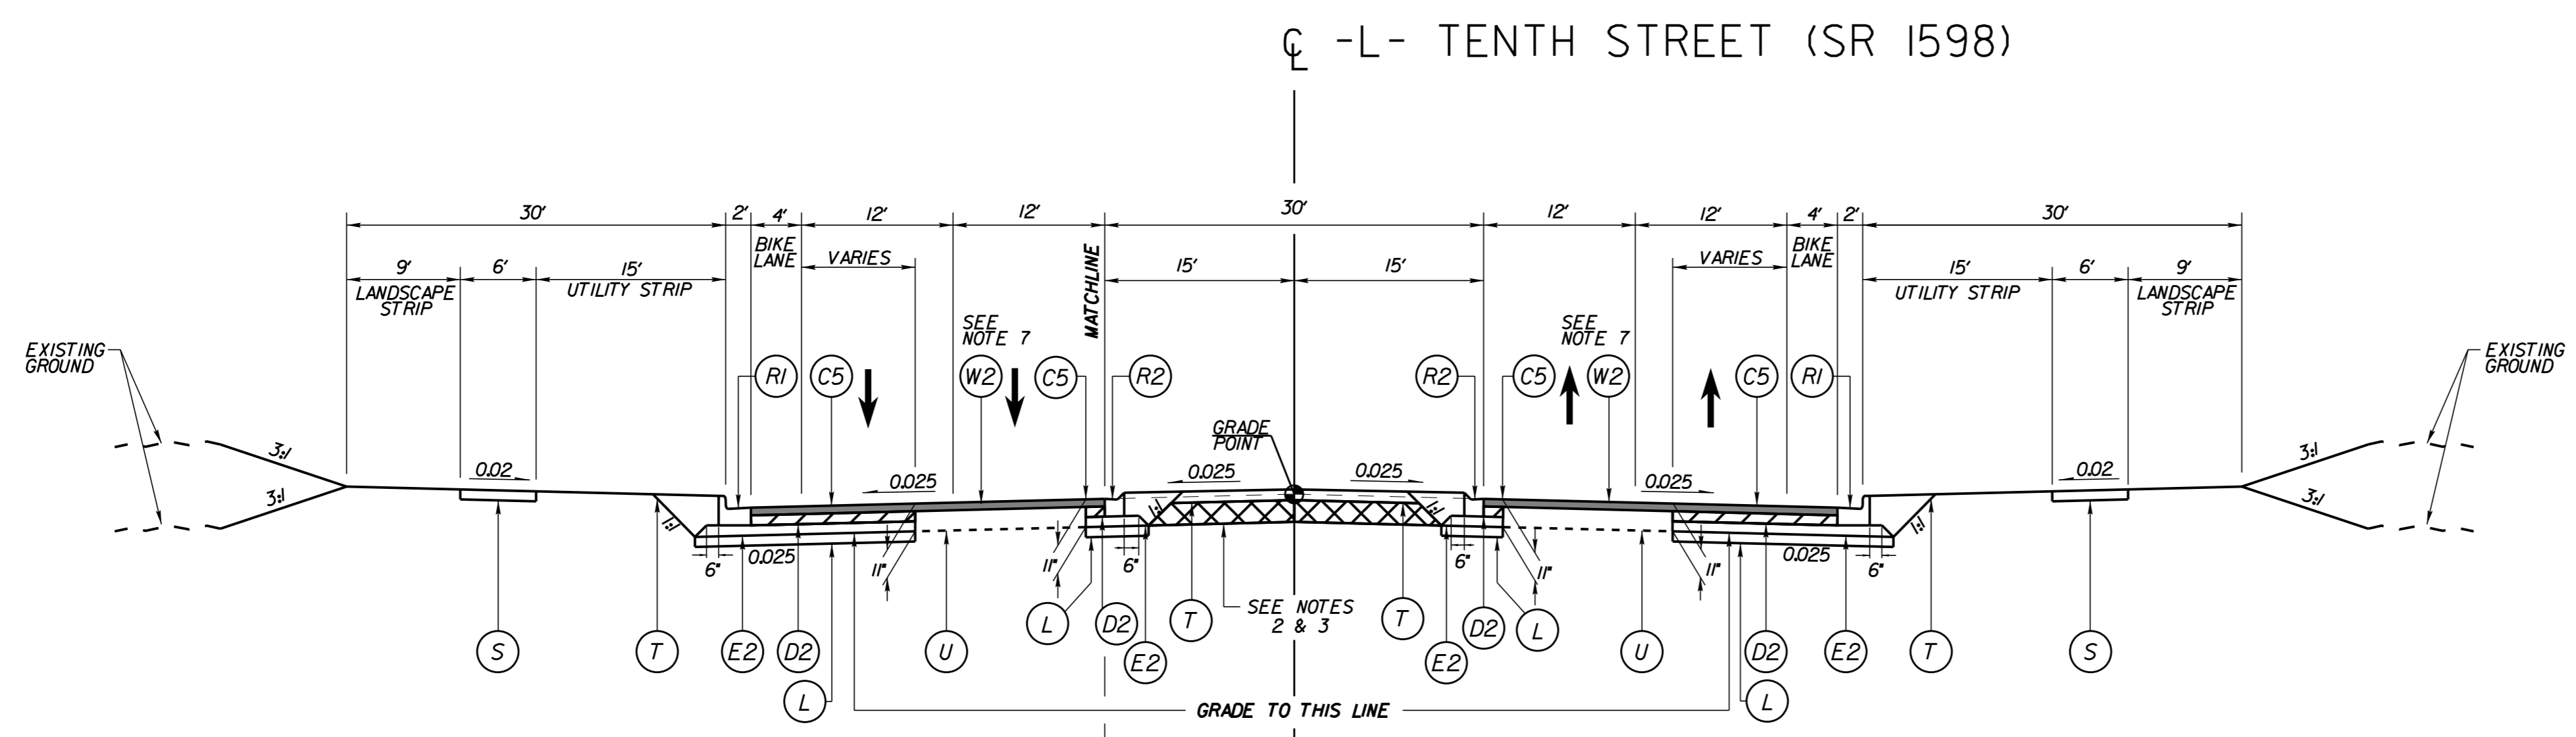

TYPICAL SECTION NO. 2
-L- STA 21+39.61 TO STA 57+00.00

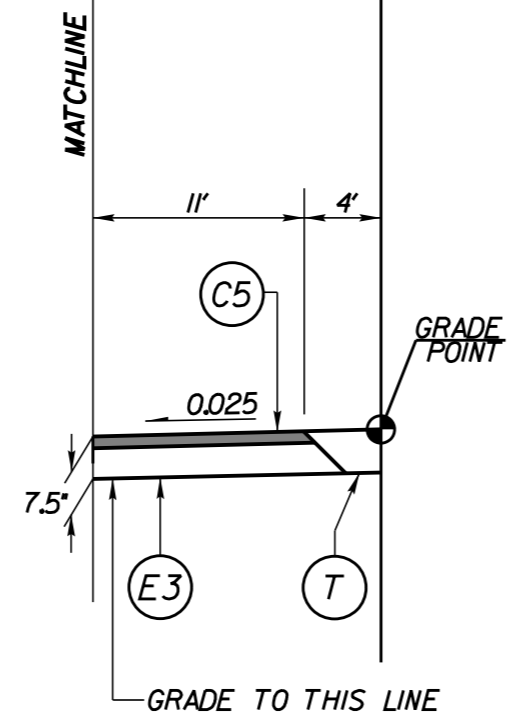

TYPICAL SECTION NO. 2A
TEMPORARY WIDENING
-L- STA 25+88.00 TO STA 31+82.00

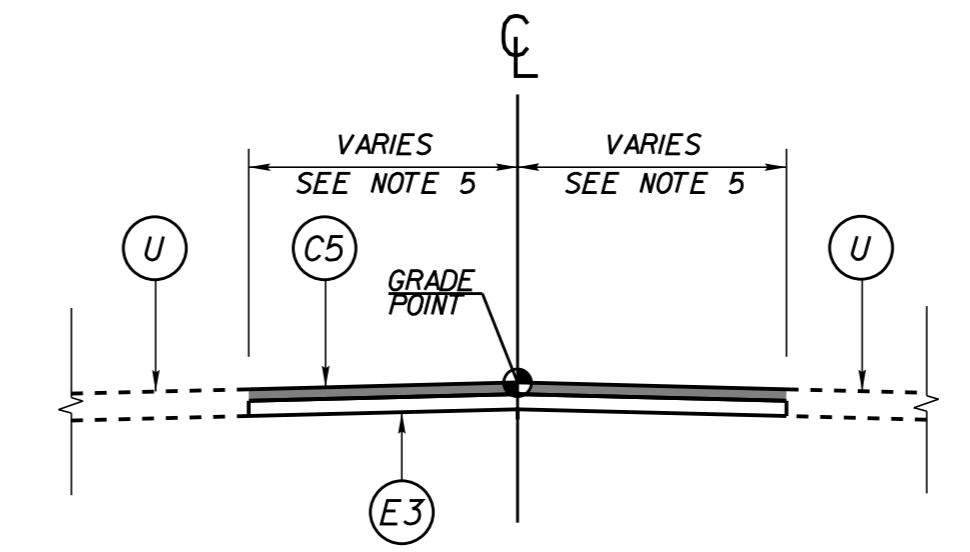

TYPICAL SECTION NO. 2B
TEMPORARY ASPHALT PAVEMENT
-L- STA 25+88.00 TO STA 31+72.50
-L- STA 33+32.15 TO STA 34+67.46
-L- STA 45+85.00 TO STA 47+60.35

PAVEMENT SCHEDULE	
C2	PROPOSED APPROX 1.5" ASPHALT CONCRETE SURFACE COURSE TYPE S9.5B, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD.
C3	PROPOSED APPROX 1.5" ASPHALT CONCRETE SURFACE COURSE TYPE S9.5C, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD.
C4	PROPOSED APPROX 3" ASPHALT CONCRETE SURFACE COURSE TYPE S9.5B, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD. IN EACH OF TWO LAYERS.
C5	PROPOSED APPROX 3" ASPHALT CONCRETE SURFACE COURSE TYPE S9.5C, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD. IN EACH OF TWO LAYERS.
C6	PROPOSED VAR. DEPTH ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 112 LBS. PER SQ. YD. PER 1" DEPTH, TO BE PLACED IN LAYERS NOT LESS THAN 1.5" IN DEPTH OR GREATER THAN 2" IN DEPTH.
C7	PROPOSED VAR. DEPTH ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 112 LBS. PER SQ. YD. PER 1" DEPTH, TO BE PLACED IN LAYERS NOT LESS THAN 1.5" IN DEPTH OR GREATER THAN 2" IN DEPTH.
D1	PROPOSED APPROX. 4" ASPHALT CONCRETE INTERMEDIATE COURSE TYPE 119.0B, AT AN AVERAGE RATE OF 456 LBS. PER SQ. YD.
D2	PROPOSED APPROX. 4" ASPHALT CONCRETE INTERMEDIATE COURSE TYPE 119.0C, AT AN AVERAGE RATE OF 456 LBS. PER SQ. YD.
D3	PROPOSED VAR. DEPTH ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE 119.0B, AT AN AVERAGE RATE OF 114 LBS. PER SQ. YD. PER 1" DEPTH TO BE PLACED IN LAYERS NOT LESS THAN 2.5" OR GREATER THAN 4" IN DEPTH.
D4	PROPOSED VAR. DEPTH ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE 119.0C, AT AN AVERAGE RATE OF 114 LBS. PER SQ. YD. PER 1" DEPTH TO BE PLACED IN LAYERS NOT LESS THAN 2.5" OR GREATER THAN 4" IN DEPTH.
E1	PROPOSED APPROX. 4" ASPHALT CONCRETE BASE COURSE TYPE B25.0B, AT AN AVERAGE RATE OF 456 LBS. PER SQ. YD.
E2	PROPOSED APPROX. 4" ASPHALT CONCRETE BASE COURSE TYPE B25.0C, AT AN AVERAGE RATE OF 456 LBS. PER SQ. YD.
E3	PROPOSED APPROX. 4.5" ASPHALT CONCRETE BASE COURSE TYPE B25.0C, AT AN AVERAGE RATE OF 513 LBS. PER SQ. YD.
E4	PROPOSED APPROX. 5" ASPHALT CONCRETE BASE COURSE TYPE B25.0C, AT AN AVERAGE RATE OF 570 LBS. PER SQ. YD.
E5	PROPOSED VAR. DEPTH ASPHALT CONCRETE BASE COURSE, TYPE B25.0B, AT AN AVERAGE RATE OF 114 LBS. PER SQ. YD. PER 1" DEPTH TO BE PLACED IN LAYERS NOT LESS THAN 3" OR GREATER THAN 5.5" IN DEPTH.
E6	PROPOSED VAR. DEPTH ASPHALT CONCRETE BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 114 LBS. PER SQ. YD. PER 1" DEPTH TO BE PLACED IN LAYERS NOT LESS THAN 3" OR GREATER THAN 5.5" IN DEPTH.
L	CLASS IV AGGREGATE STABILIZATION
N	GEOTEXTILE FOR PAVEMENT STABILIZATION
R1	PROPOSED 2'-6" CONCRETE CURB & GUTTER
R2	PROPOSED 1'-6" CONCRETE CURB & GUTTER
R3	PROPOSED 5" MONOLITHIC CONCRETE ISLAND (KEYED-IN)
S	PROPOSED 4" CONCRETE SIDEWALK
T	EARTH MATERIAL
U	EXISTING PAVEMENT
V	MILLING EXISTING PAVEMENT (SEE DETAIL, SHEET 2A-2)
W	VARIABLE DEPTH ASPHALT PAVEMENT (SEE DETAILS, SHEET 2A-2)

K:\RAL_Roadway\01036175_U-3315\Roadway\Pro\U-3315_rdy_typ.dgn

5/12/2015