


8/13/2015 11:21 AM P

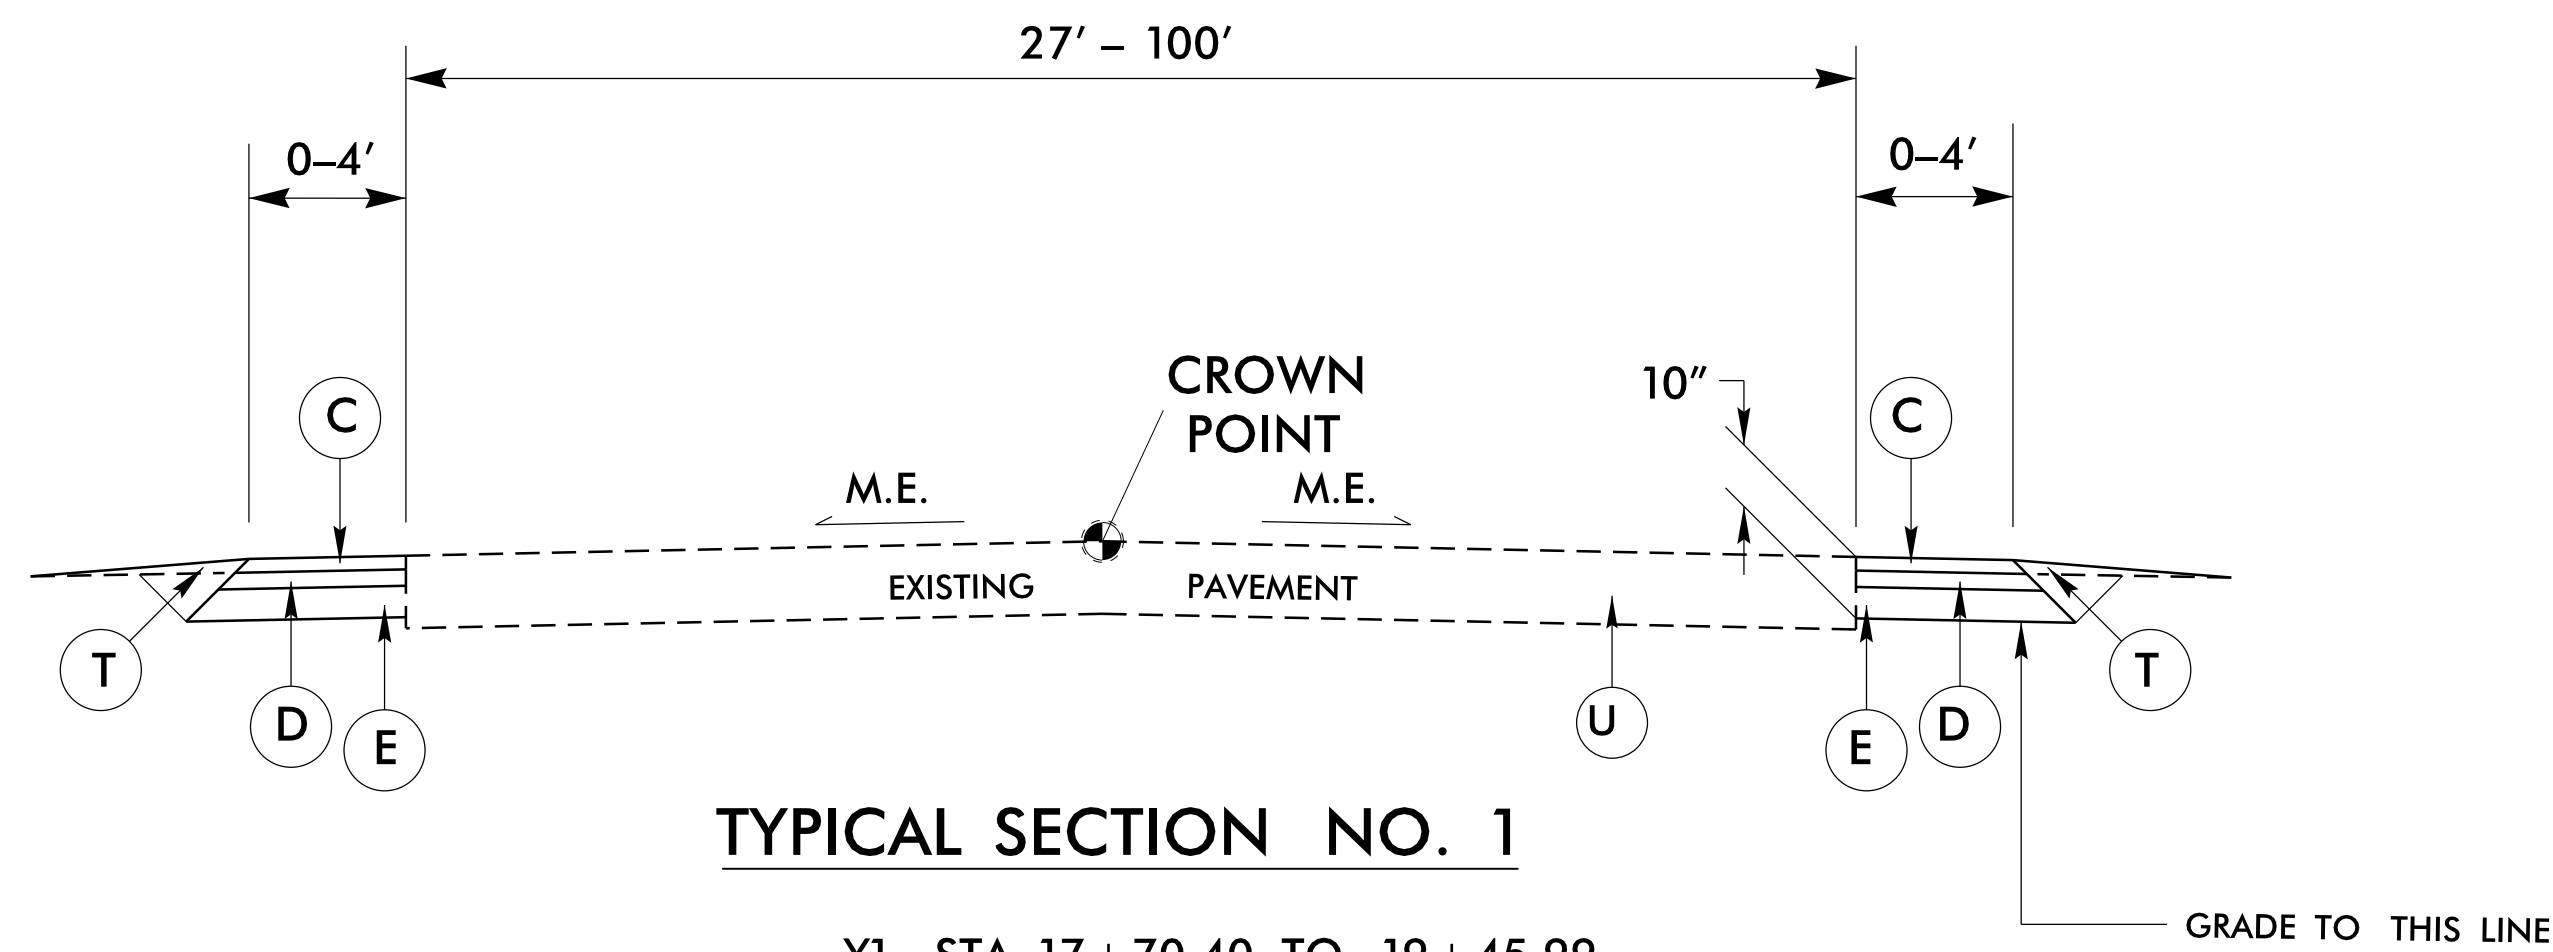


TYPICAL SECTION NO. 1

-Y1- STA. 17+70.40 TO 19+45.99
 -L- STA. 16+14.50 TO 17+72.79

PAVEMENT SCHEDULE		R3	EXISTING CONCRETE ISLAND
C	PROP. APPROX. 3" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD. IN EACH OF TWO LAYERS.	R4	EXISTING 1'-6" CONCRETE CURB AND GUTTER.
C1	PROP. APPROX. 1 1/2" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD.	R5	EXISTING 2'-6" CONCRETE CURB AND GUTTER.
D	PROP. APPROX. 2 1/2" ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.0B, AT AN AVERAGE RATE OF 285 LBS. PER SQ. YD.	R6	4" CONCRETE ISLAND COVER.
D1	PROP. APPROX. 4" ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.0B, AT AN AVERAGE RATE OF 456 LBS. PER SQ. YD.	T	EARTH MATERIAL.
E	PROP. APPROX. 4 1/2" ASPHALT CONCRETE BASE COURSE, TYPE B25.0B, AT AN AVERAGE RATE OF 513 LBS. PER SQ. YD.	U	EXISTING PAVEMENT.
E1	PROP. APPROX. 4" ASPHALT CONCRETE BASE COURSE, TYPE B25.0B, AT AN AVERAGE RATE OF 456 LBS. PER SQ. YD.	V	1 1/2" FINE MILLING
R	5" MONOLITHIC CONCRETE ISLAND (SURFACED MOUNTED)	V1	4" MILLING
R1	2'-6" CONCRETE CURB AND GUTTER.	V2	1 1/2" TO 4" MILLING
R2	EXPRESSWAY GUTTER		

NOTE: PAVEMENT EDGE SLOPES ARE 1:1 UNLESS SHOWN OTHERWISE.

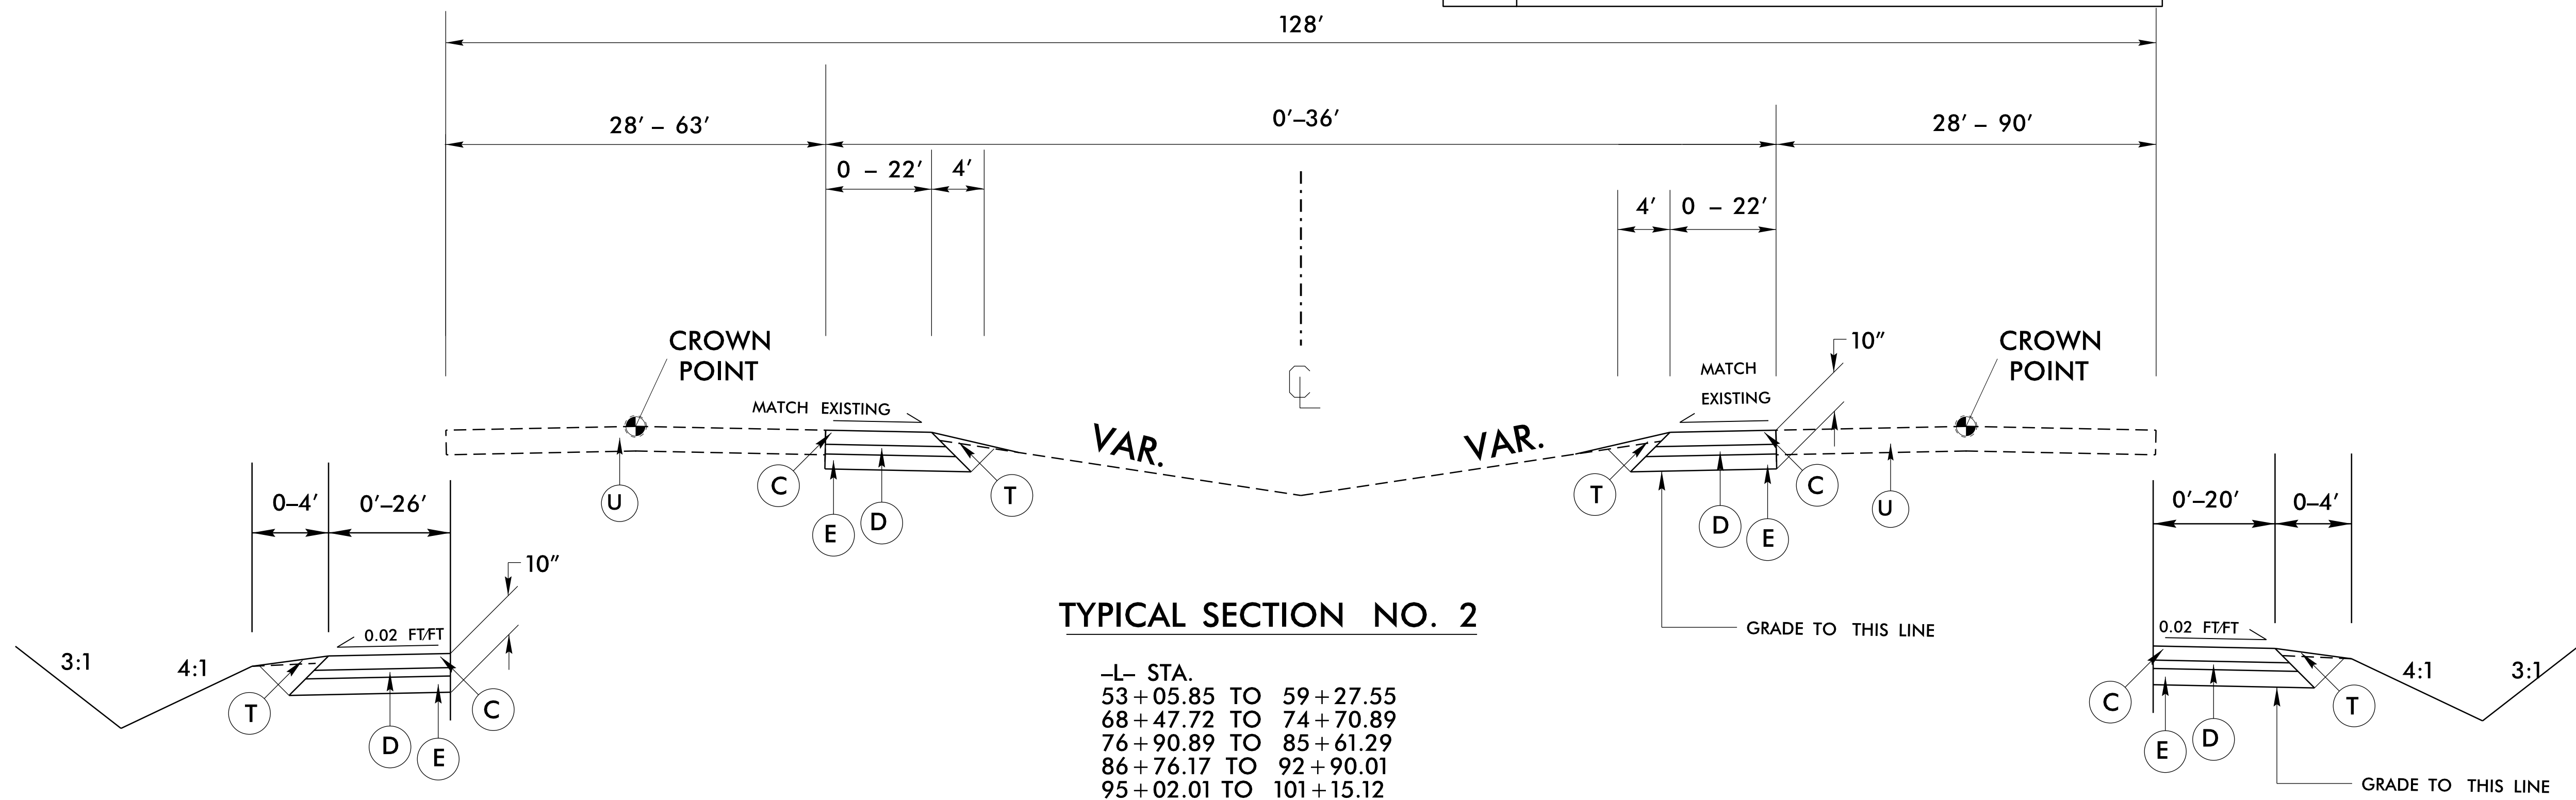

TYPICAL SECTION NO. 2

-L- STA.
 135+12.17 TO 135+94.82
 148+05.69 TO 149+42.75
 202+78.47 TO 203+36.62

-L- STA.
 53+05.85 TO 59+27.55
 68+47.72 TO 74+70.89
 76+90.89 TO 85+61.29
 86+76.17 TO 92+90.01
 95+02.01 TO 101+15.12
 108+05.21 TO 114+19.48
 116+31.49 TO 122+45.45
 129+82.54 TO 135+94.86
 138+06.87 TO 149+42.81
 151+54.83 TO 157+67.90
 197+18.18 TO 203+37.03
 212+77.35 TO 213+73.40
 215+86.90 TO 217+79.00
 222+30.85 TO 225+08.15

-L- STA.
 76+90.89 TO 78+03.58
 95+02.01 TO 96+35.25
 116+31.49 TO 117+28.30
 138+06.87 TO 138+84.40
 151+54.83 TO 155+46.20

5/14/99

J:\421\13-AUG-2015 10:29 AM\PROJECTS\ROADWAY\Plan_Sheets\5103A_D03_Rdwy_2A-1.dgn