

FYA-PPLT SIGNAL OUTPUT PAGE 2 ASSIGNMENT PROGRAMMING DETAIL FOR SIGNAL HEAD 31

(program controller as shown below)

NOTE: THIS PROGRAMMING APPLIES FOR OUTPUT PAGE 2.  
OUTPUT PAGE 1 WILL USE STANDARD DEFAULT SETTINGS.  
THIS PROGRAMMING IS NECESSARY FOR THE ALTERNATE PHASING OPERATION.

OUTPUT ASSIGNMENTS FOR SIGNAL HEAD 31

MAKE THE FOLLOWING CHANGES ON OUTPUT PAGE 2

FROM MAIN MENU PRESS '6' (OUTPUTS), THEN '1' (OUTPUT ASSIGNMENTS). PRESS 'NEXT' FOR PAGE 2, WITH CURSOR IN "OUTPUT ASSIGNMENT#" POSITION ENTER "47"

STEP 1

```

PAGE:2 C1 PIN:94 VEHICLE OVERLAP
OUTPUT ASSIGNMENT #.....47
FREQUENCY (0=DEFAULT) (0-25.5 HZ)...0.0
DUTY CYCLE (0=DEFAULT) (0 - 100%)...0
MODE (0=SQL ID,1=FLASH)...0
SELECT ASSIGNMENT:
NOT ENABLED.....Y
VEHICLE PHASE.....Y
PEDESTRIAN PHASE.....Y
VEHICLE OVERLAP.....Y
PEDESTRIAN OVERLAP.....Y
WATCHDOG.....Y
DETECTOR RESET.....Y
ADVANCE BEACON.....Y
OUT OF PHASE FLASHER.....Y
CONTROLLER FLASH.....Y
RUN FREE.....Y
RESERVED.....Y
PREEMPT.....Y
SOFT PREEMPT.....Y
ANY PREEMPT.....Y
COORDINATION PLAN.....Y
OFFSET.....Y
PHASE CHECK.....Y
PHASE ON.....Y
PHASE NEXT.....Y
    
```

ENTER A "Y" FOR VEHICLE PHASE.  
THE OUTPUT IS SET AS AN OVERLAP BY DEFAULT. THIS "Y" WILL REMAIN UNTIL THE OUTPUT IS CHANGED.

```

PAGE:2 C1 PIN:94 VEHICLE OVERLAP
SELECT VEHICLE PHASE (1-16).....3
SELECT COLOR(0=RED,1=YEL,2=GRN).....0
    
```

WHEN A 'Y' IS ENTERED FOR 'VEHICLE PHASE' THE SCREEN SHOWN ABOVE WILL APPEAR. ENTER DATA AS SHOWN.  
PRESS THE 'ENT' KEY AFTER INPUTING DATA, THEN 'ESC'.

DISPLAY WILL NOW SHOW THE SPECIFIED OUTPUT ASSIGNED AS 'VEHICLE PHASE' AS SHOWN BELOW.

```

PAGE:2 C1 PIN:94 VEHICLE PHASE
OUTPUT ASSIGNMENT #.....47
FREQUENCY (0=DEFAULT) (0-25.5 HZ)...0.0
DUTY CYCLE (0=DEFAULT) (0 - 100%)...0
MODE (0=SQL ID,1=FLASH)...0
SELECT ASSIGNMENT:
NOT ENABLED.....Y
VEHICLE PHASE.....Y
PEDESTRIAN PHASE.....Y
VEHICLE OVERLAP.....Y
PEDESTRIAN OVERLAP.....Y
WATCHDOG.....Y
DETECTOR RESET.....Y
ADVANCE BEACON.....Y
OUT OF PHASE FLASHER.....Y
CONTROLLER FLASH.....Y
RUN FREE.....Y
RESERVED.....Y
PREEMPT.....Y
SOFT PREEMPT.....Y
ANY PREEMPT.....Y
COORDINATION PLAN.....Y
OFFSET.....Y
PHASE CHECK.....Y
PHASE ON.....Y
PHASE NEXT.....Y
    
```

DISPLAY WILL NOW SHOW THE SPECIFIED OUTPUT ASSIGNED AS 'NOT ENABLED' AS SHOWN BELOW.

STEP 3

```

PAGE:2 C1 PIN:96 VEHICLE OVERLAP
OUTPUT ASSIGNMENT #.....49
FREQUENCY (0=DEFAULT) (0-25.5 HZ)...0.0
DUTY CYCLE (0=DEFAULT) (0 - 100%)...0
MODE (0=SQL ID,1=FLASH)...0
SELECT ASSIGNMENT:
NOT ENABLED.....Y
VEHICLE PHASE.....Y
PEDESTRIAN PHASE.....Y
VEHICLE OVERLAP.....Y
PEDESTRIAN OVERLAP.....Y
WATCHDOG.....Y
DETECTOR RESET.....Y
ADVANCE BEACON.....Y
OUT OF PHASE FLASHER.....Y
CONTROLLER FLASH.....Y
RUN FREE.....Y
RESERVED.....Y
PREEMPT.....Y
SOFT PREEMPT.....Y
ANY PREEMPT.....Y
COORDINATION PLAN.....Y
OFFSET.....Y
PHASE CHECK.....Y
PHASE ON.....Y
PHASE NEXT.....Y
    
```

ENTER A "Y" FOR NOT ENABLED (THIS WILL DISABLE THE OUTPUT)  
THE OUTPUT IS SET AS AN OVERLAP BY DEFAULT. THIS "Y" WILL REMAIN UNTIL THE OUTPUT IS CHANGED.

```

PAGE:2 C1 PIN:96 NOT ENABLED
OUTPUT ASSIGNMENT #.....49
FREQUENCY (0=DEFAULT) (0-25.5 HZ)...0.0
DUTY CYCLE (0=DEFAULT) (0 - 100%)...0
MODE (0=SQL ID,1=FLASH)...0
SELECT ASSIGNMENT:
NOT ENABLED.....Y
VEHICLE PHASE.....Y
PEDESTRIAN PHASE.....Y
VEHICLE OVERLAP.....Y
PEDESTRIAN OVERLAP.....Y
WATCHDOG.....Y
DETECTOR RESET.....Y
ADVANCE BEACON.....Y
OUT OF PHASE FLASHER.....Y
CONTROLLER FLASH.....Y
RUN FREE.....Y
RESERVED.....Y
PREEMPT.....Y
SOFT PREEMPT.....Y
ANY PREEMPT.....Y
COORDINATION PLAN.....Y
OFFSET.....Y
PHASE CHECK.....Y
PHASE ON.....Y
PHASE NEXT.....Y
    
```

OUTPUT PROGRAMMING COMPLETE

PRESS "+" KEY FOR OUTPUT 48

STEP 2

```

PAGE:2 C1 PIN:95 VEHICLE OVERLAP
OUTPUT ASSIGNMENT #.....48
FREQUENCY (0=DEFAULT) (0-25.5 HZ)...0.0
DUTY CYCLE (0=DEFAULT) (0 - 100%)...0
MODE (0=SQL ID,1=FLASH)...0
SELECT ASSIGNMENT:
NOT ENABLED.....Y
VEHICLE PHASE.....Y
PEDESTRIAN PHASE.....Y
VEHICLE OVERLAP.....Y
PEDESTRIAN OVERLAP.....Y
WATCHDOG.....Y
DETECTOR RESET.....Y
ADVANCE BEACON.....Y
OUT OF PHASE FLASHER.....Y
CONTROLLER FLASH.....Y
RUN FREE.....Y
RESERVED.....Y
PREEMPT.....Y
SOFT PREEMPT.....Y
ANY PREEMPT.....Y
COORDINATION PLAN.....Y
OFFSET.....Y
PHASE CHECK.....Y
PHASE ON.....Y
PHASE NEXT.....Y
    
```

ENTER A "Y" FOR VEHICLE PHASE.  
THE OUTPUT IS SET AS AN OVERLAP BY DEFAULT. THIS "Y" WILL REMAIN UNTIL THE OUTPUT IS CHANGED.

```

PAGE:2 C1 PIN:95 VEHICLE OVERLAP
SELECT VEHICLE PHASE (1-16).....3
SELECT COLOR(0=RED,1=YEL,2=GRN).....1
    
```

WHEN A 'Y' IS ENTERED FOR 'VEHICLE PHASE' THE SCREEN SHOWN ABOVE WILL APPEAR. ENTER DATA AS SHOWN.  
PRESS THE 'ENT' KEY AFTER INPUTING DATA, THEN 'ESC'.

DISPLAY WILL NOW SHOW THE SPECIFIED OUTPUT ASSIGNED AS 'VEHICLE PHASE' AS SHOWN BELOW.

```

PAGE:2 C1 PIN:95 VEHICLE PHASE
OUTPUT ASSIGNMENT #.....48
FREQUENCY (0=DEFAULT) (0-25.5 HZ)...0.0
DUTY CYCLE (0=DEFAULT) (0 - 100%)...0
MODE (0=SQL ID,1=FLASH)...0
SELECT ASSIGNMENT:
NOT ENABLED.....Y
VEHICLE PHASE.....Y
PEDESTRIAN PHASE.....Y
VEHICLE OVERLAP.....Y
PEDESTRIAN OVERLAP.....Y
WATCHDOG.....Y
DETECTOR RESET.....Y
ADVANCE BEACON.....Y
OUT OF PHASE FLASHER.....Y
CONTROLLER FLASH.....Y
RUN FREE.....Y
RESERVED.....Y
PREEMPT.....Y
SOFT PREEMPT.....Y
ANY PREEMPT.....Y
COORDINATION PLAN.....Y
OFFSET.....Y
PHASE CHECK.....Y
PHASE ON.....Y
PHASE NEXT.....Y
    
```

PRESS "+" KEY FOR OUTPUT 49

TOD EVENT SCHEDULING PROGRAMMING DETAIL TO CALL ALTERNATE PHASING OPERATION

(program controller as shown below)

THIS EVENT SCHEDULING DETAIL SHOWS THE TOD PROGRAMMING STEPS NECESSARY FOR THE CONTROLLER TO OPERATE THE "ALTERNATE PHASING" AS SHOWN ON THE SIGNAL PLANS.

FROM MAIN MENU PRESS "B" (SCHEDULING)

EVENT NO.	EVENT TYPE	DESCRIPTION OF OPERATION
1	CHANGE OUTPUT PAGE (1-4).....2	MODIFIES CONTROL CIRCUITS FOR SIGNAL HEAD 31.
2	DISABLE DET STRETCH / DELAY (1-64)..3	DELAY IS DISABLED FOR DETECTOR 3 (LOOP 3A).

NOTE: THE EVENTS ABOVE WILL ALLOW SIGNAL HEAD 31 TO OPERATE IN THE PROTECTED ONLY MODE.

ALL EVENTS SHOWN ABOVE SHALL BE PROGRAMMED TO START AND STOP ON THE SAME TIMES AND DATES.



NOTE: THE OUTPUT ASSIGNMENT CHANGES, SHOWN ABOVE, ARE NECESSARY FOR THE TIME OF DAY OPERATION OF SIGNAL HEAD 31. IN ALTERNATE PHASING (PROTECTED ONLY) OPERATION, THE RED ARROW CONTROL IS SWITCHED TO THE LEFT TURN PHASE RED. THE SOLID YELLOW ARROW CONTROL IS SWITCHED TO THE LEFT TURN PHASE YELLOW. IN ADDITION, THE FLASHING YELLOW ARROW IS SWITCHED OFF BY DISABLING THE OVERLAP GREEN OUTPUT.

THESE OUTPUT CHANGES ARE ACCOMPLISHED ON OUTPUT PAGE 2. THEREFORE IN ALTERNATE PHASING MODE THE OUTPUT PAGE IS SWITCHED TO 2. THE OUTPUT PAGE CHANGE IS ACCOMPLISHED BY THE CONTROLLERS TOD EVENT SCHEDULER.

IN NORMAL PHASING (PPLT) MODE THE STANDARD, DEFAULT, OUPUT ASSIGNMENTS ARE USED WHICH ARE DESIGNATED ON OUTPUT PAGE 1.

Electrical Detail - Sheet 5 of 5

THIS ELECTRICAL DETAIL IS FOR THE SIGNAL DESIGN: 03-0753  
DESIGNED: March 2008  
SEALED: 7/29/2008  
REVISED: 12/22/14  
REVISED2: 7/22/15

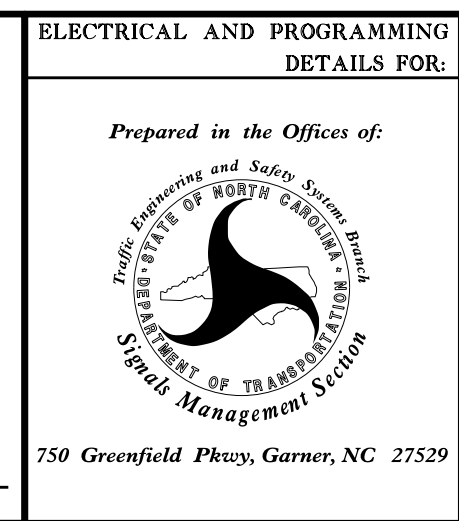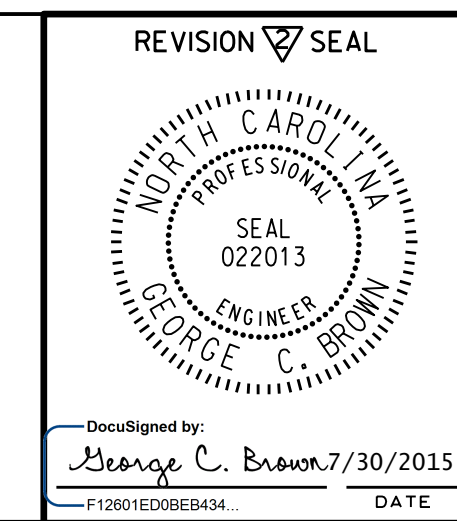

US 421 (Carolina Beach Road)	
at	
SR 2501 (Service Road) / Fire Dept.	
Division 3	New Hanover County
Myrtle Grove	
PLAN DATE: March 2008	REVIEWED BY:
PREPARED BY: R. Hinshaw	REVIEWED BY:
REVISIONS	INIT. DATE
1	2/6/09
2	7/30/2015
No change to Electrical detail. CES 7/14/15	

SEAL  
Not a certified document as to the Original Document but only as to the Revisions - This document originally issued and sealed by F. Royal Hinshaw, #032117, on 8-12-08.  
This document is only certified as to the revisions.

SIGNATURE DATE  
SIG. INVENTORY NO. 03-0753