


PROJECT REFERENCE NO.	SHEET NO.
R-2603	EC-28/CONST.7
RW SHEET NO.	
ROADWAY DESIGN ENGINEER	HYDRAULICS ENGINEER

NOTE:
UTILIZE FABRIC INSERT INLET PROTECTION DEVICE IN LIEU OF ROCK INLET SEDIMENT TRAP TYPE-C AT LOCATIONS WHERE THEY CANNOT BE INSTALLED CORRECTLY OR IMPOUND WATER ON ACTIVE TRAVEL LANES

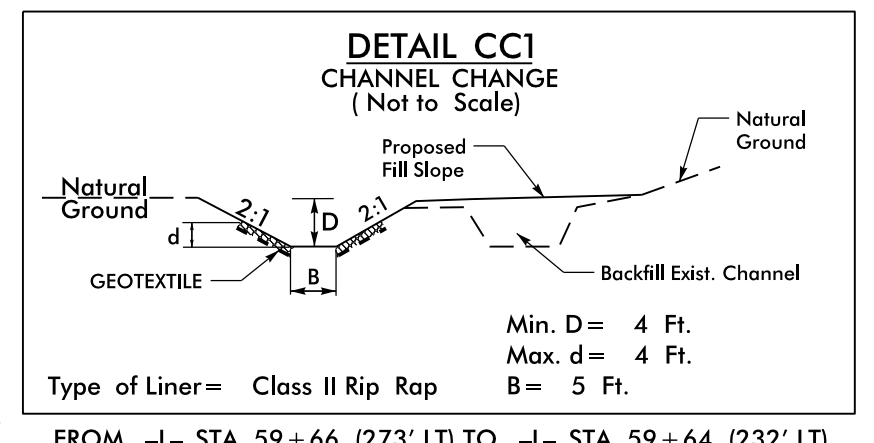

PERMANENT CHANNEL CHANGE
W/CLASS II RIP RAP
SEE DETAIL CCI
EST. 50 TONS
146 SY GEOTEXTILE

BEGIN CONSTRUCTION
-Y8- POC 12+55.00

BEGIN CONSTRUCTION
-Y7- POT 11+00.00




END CULVERT
-L- STA 59+47.31

BEGIN CULVERT
-L- STA 59+39.29

LATERAL 'V' DITCH
SEE DETAIL L1
EST. 32 CY DDE
CLASS 'B' RIP RAP
EST. 2 TONS W/LT
7 SY GEOTEXTILE

30 x 15 x 3
1.5 inch Skimmer
with 0.5 inch
Orifice Diameter
7 ft. weir
ID 7.2 C&G

64 x 32 x 4
1.5 inch Skimmer
with 1.5 inch
Orifice Diameter
24 ft. weir
ID 7.1 C&G

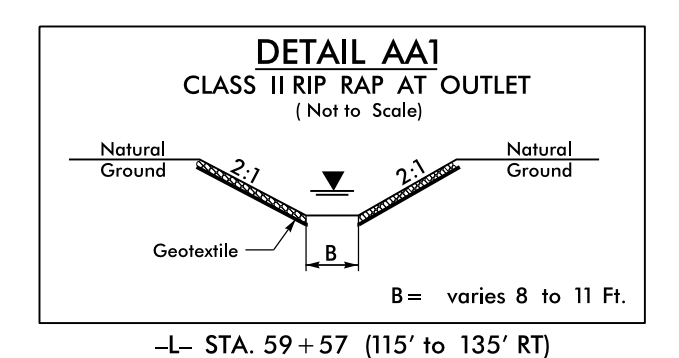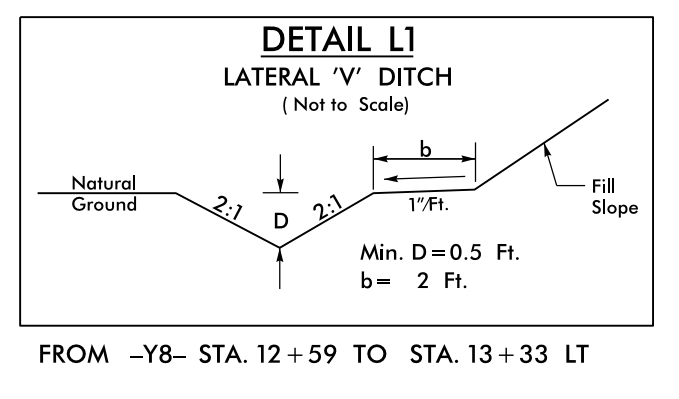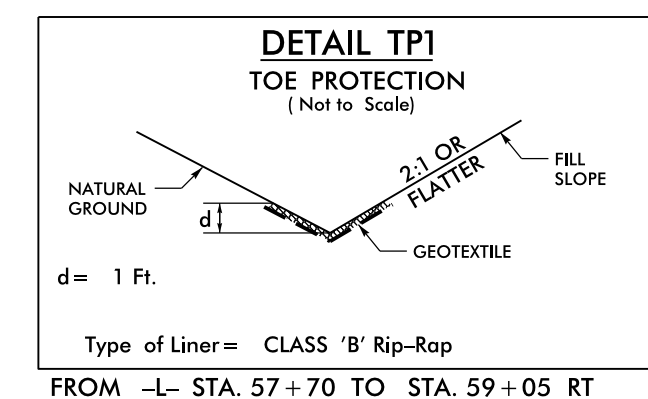

TEMPORARY SHORING

8/17/99

94 JUN-2015 10:44
R:\New\Projects\2603-EC-ps\07.dgn

