


TABLE OF OPERATION

SIGNAL FACE	PHASE							
	01+5	01+6	02+5	02+6	03+7	03+8	04+7	04+8
11	—	—	—	—	—	—	—	—
21, 22	R	R	G	G	R	R	R	Y
31	—	—	—	—	—	—	—	—
41, 42	R	R	R	R	R	R	G	G
51	—	—	—	—	—	—	—	—
61, 62	R	G	R	G	R	R	R	Y
71	—	—	—	—	—	—	—	—
81, 82	R	R	R	R	R	G	R	G

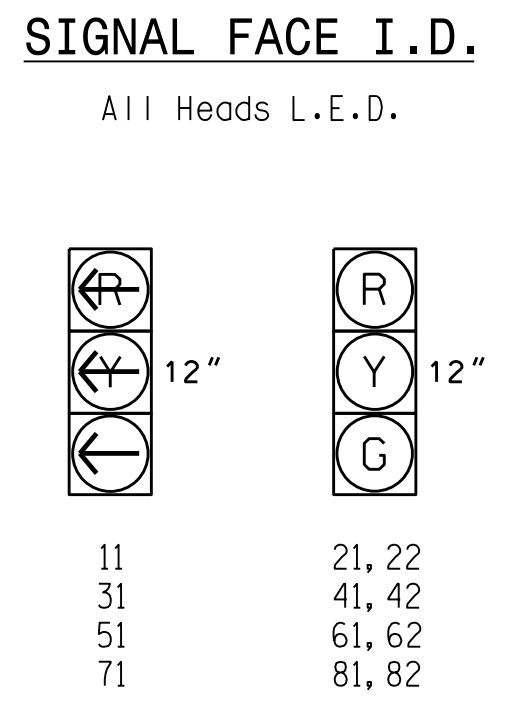


OASIS 2070 LOOP & DETECTOR INSTALLATION CHART

LOOP	SIZE (FT)	DISTANCE FROM STOPBAR (FT)	TURNS	DETECTOR PROGRAMMING				SYSTEM LOOP	NEW CARD	
				PHASE	CALLING	EXTENSION	STRETCH TIME			DELAY TIME
1A	6X60	+5	2-4-2	-	1	Y	Y	-	-	Y
2A, 2B	6X6	300	EXIST	-	2	Y	Y	-	-	Y
2C, 2D	6X6	90	EXIST	-	DISCONNECT				-	-
3A	6X60	+5	2-4-2	-	3	Y	Y	-	3	Y
4A	6X60	+5	2-4-2	-	4	Y	Y	-	-	Y
5A	6X60	+5	2-4-2	-	5	Y	Y	-	-	Y
6A, 6B	6X6	330	EXIST	-	6	Y	Y	-	-	Y
6C, 6D	6X6	90	EXIST	-	DISCONNECT				-	-
7A	6X60	+5	2-4-2	-	7	Y	Y	-	3	Y
8A	6X60	+5	2-4-2	-	8	Y	Y	-	10	Y

8 Phase Fully Actuated (High Point Signal System)

NOTES


- Refer to "Roadway Standard Drawings NCDOT" dated January 2012 and "Standard Specifications for Roads and Structures" dated January 2012.
- Do not program signal for late night flashing operation unless otherwise directed by the Engineer.
- Phase 1 and/or phase 5 may be lagged.
- Phase 3 and/or phase 7 may be lagged.
- Disconnect existing loops 2C, 2D, 6C, and 6D.
- Set all detector units to presence mode.
- In the event of loop replacement, refer to the current ITS and Signals Design Manual and submit a Plan of Record to the Signal Design Section.
- Locate new cabinet so as not to obstruct sight distance of vehicles turning right on red.
- Pavement markings are existing.
- Maximum times shown in timing chart are for free-run operation only. Coordinated signal system timing values supersede these values.

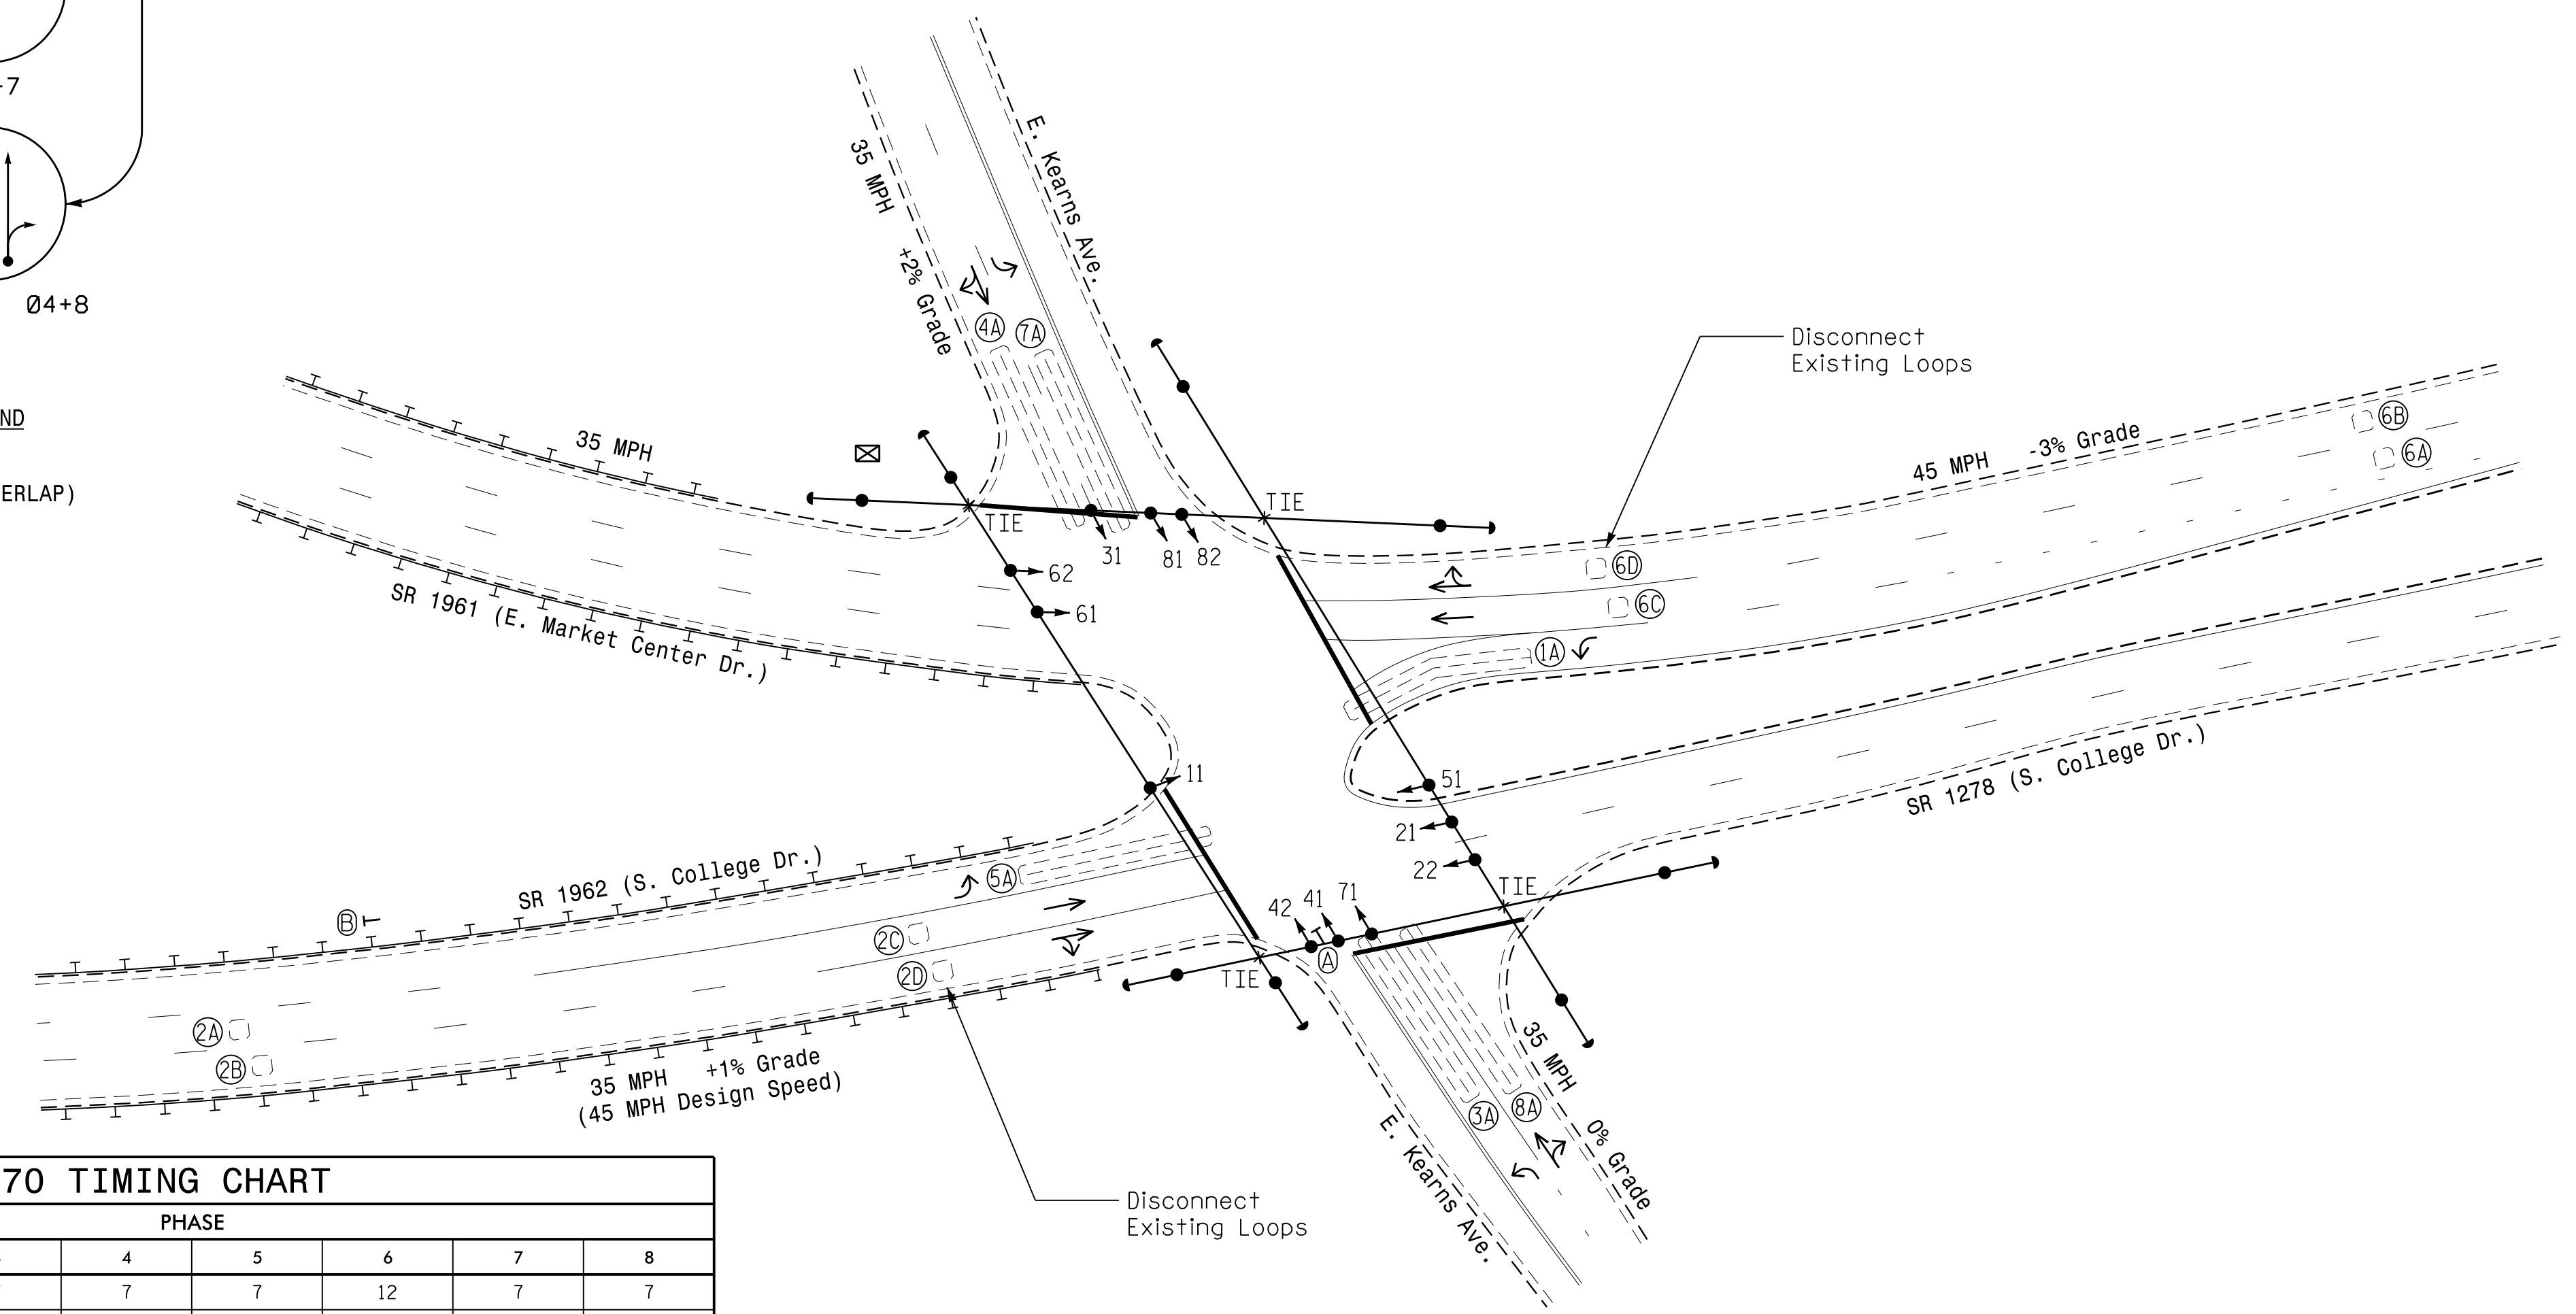

OASIS 2070 TIMING CHART

FEATURE	PHASE							
	1	2	3	4	5	6	7	8
Min Green 1 *	7	12	7	7	7	12	7	7
Extension 1 *	1.0	6.0	1.0	1.0	1.0	6.5	1.0	1.0
Max Green 1 *	15	60	15	25	15	60	15	25
Yellow Clearance	3.0	4.4	3.0	3.7	3.0	4.8	3.0	3.8
Red Clearance	2.6	1.0	3.6	2.9	3.3	1.1	3.9	2.9
Red Revert	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0
Walk 1 *	-	-	-	-	-	-	-	-
Don't Walk 1	-	-	-	-	-	-	-	-
Seconds Per Actuation *	-	1.5	-	-	-	1.5	-	-
Max Variable Initial *	-	34	-	-	-	37	-	-
Time Before Reduction *	-	15	-	-	-	15	-	-
Time To Reduce *	-	30	-	-	-	30	-	-
Minimum Gap	-	3.0	-	-	-	3.0	-	-
Recall Mode **	-	SOFT RECALL	-	-	-	SOFT RECALL	-	-
Vehicle Call Memory	-	YELLOW	-	-	-	YELLOW	-	-
Dual Entry	-	-	-	-	-	-	-	-
Simultaneous Gap	ON	ON	ON	ON	ON	ON	ON	ON

* These values may be field adjusted. Do not adjust Min Green and Extension times for phases 2 and 6 lower than what is shown. Min Green for all other phases should not be lower than 4 seconds.
** May be changed to Min Recall by Time of Day at discretion of City Traffic Engineer.

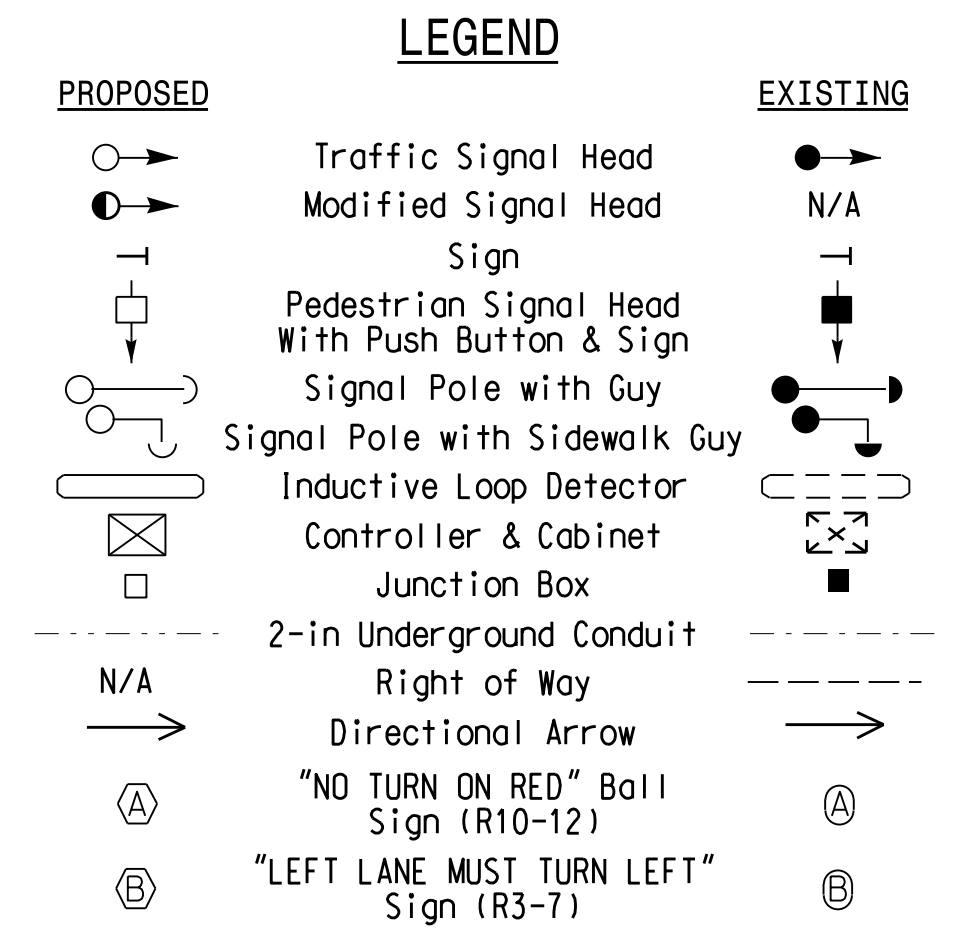

Signal Upgrade

Prepared in the Offices of:

 750 N. Greenfield Pkwy, Garner, NC 27529

SR 1962/1278 (S. College Dr.) & SR 1961 (E. Market Center Dr.) at E. Kearns Avenue
 Guilford County High Point

PLAN DATE: August 2014 REVIEWED BY: R.N. Zinser
 PREPARED BY: R.N. Zinser REVIEWED BY: [Signature]

SEAL
 NORTH CAROLINA PROFESSIONAL ENGINEER
 ROBERT J. ZEMBA
 026486
 3/16/2015
 SIG. INVENTORY NO. 07-1176

SCALE 1"=40'

16-MAR-2015 13:06
 S:\MITSU\ITS_Signal\Signal Design_Section\Central_Regional\iv_Tec-5558_High_Point\Signal_Plans\07-1176\071176_Sig.dsn_20150316.dgn
 rz1:tergo