

PROJECT REFERENCE NO. SHEET NO.

C-5558 ITS-5.12

SPARE CABLE STORAGE TYP. DETAIL

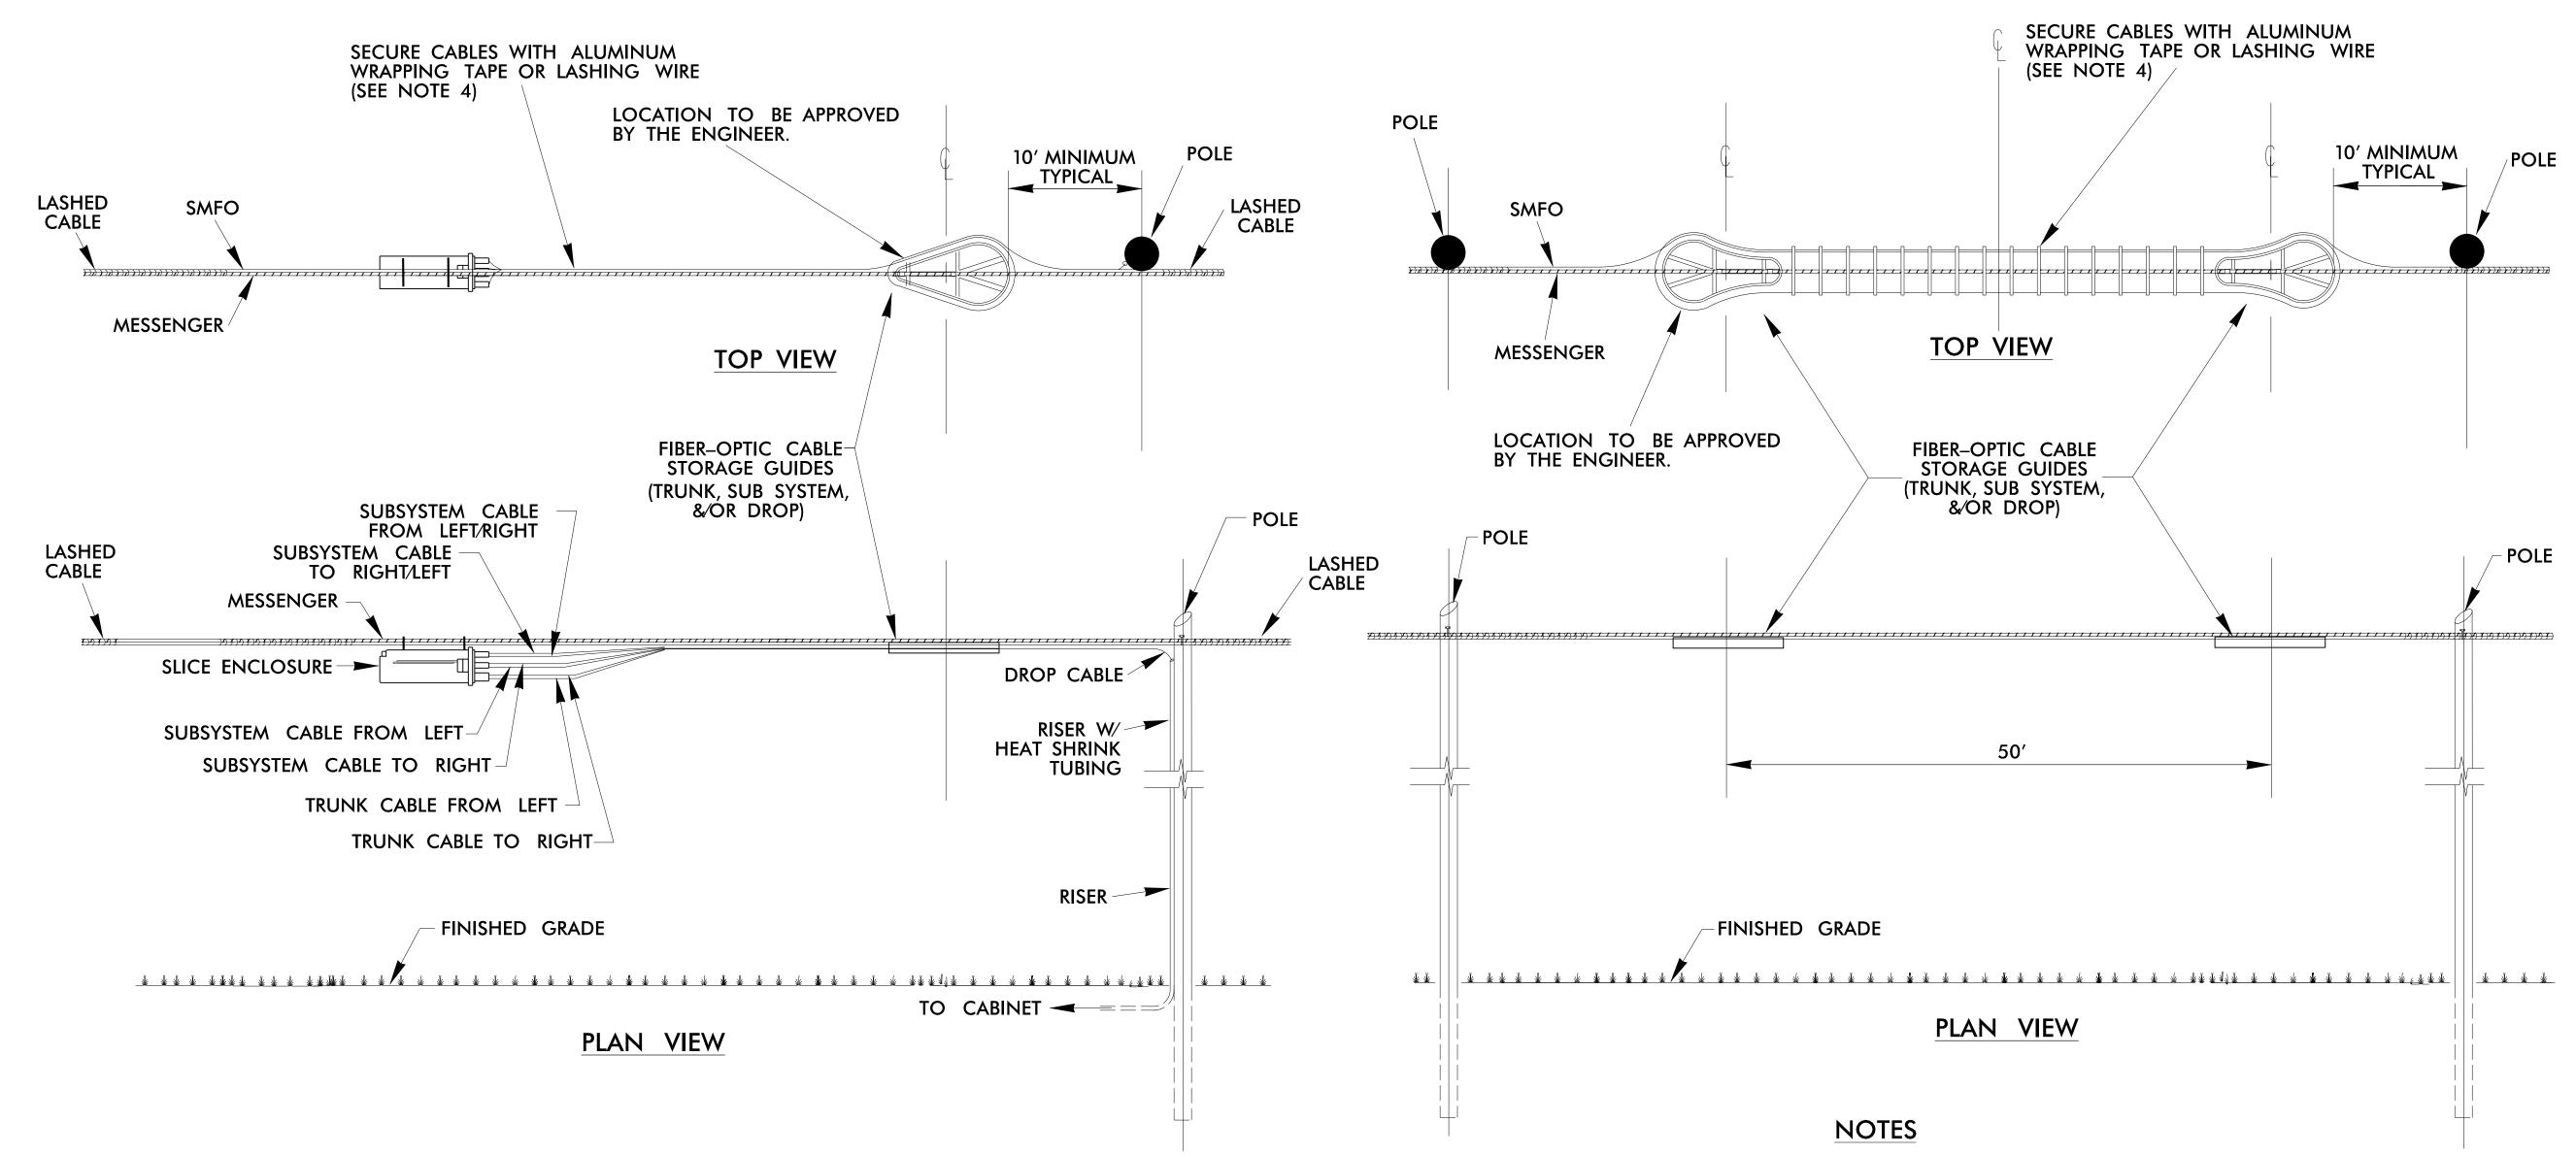

SPLICE ENCLOSURE DETAILS

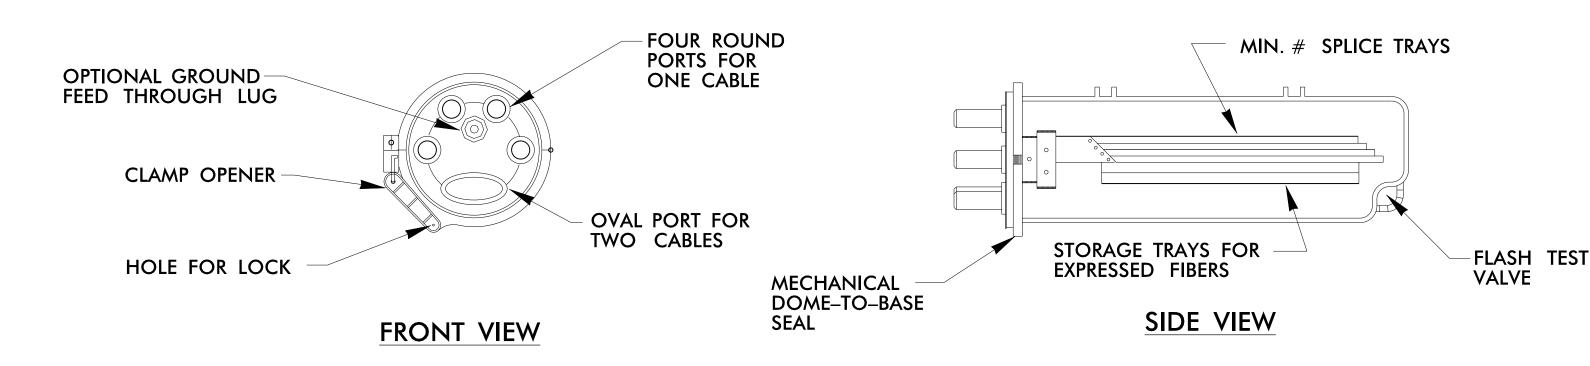


SPLICE ENCLOSURE WITH STORAGE TYP. DETAIL

- 1. SPARE FIBER-OPTIC CABLE SHALL NOT BE STORED OVER ROADWAYS OR DRIVEWAYS.
- 2. STORE 100' OF SPARE FIBER-OPTIC CABLE WHERE SHOWN ON PLANS.
- 3. FIBER-OPTIC CABLE STORAGE GUIDE MATERIAL AND SIZE SHALL BE AS INDICATED IN THE PROJECT SPECIAL PROVISIONS.
- 4. 0.05" THICK BY 0.3" WIDE ALUMINUM WRAPPING TAPE (FOUR TURNS MINIMUM)
 AT 6" ON CENTER OR .061" LASHING WIRE WITH ONE 360 DEGREE SPIRAL PER FOOT.
- 5. FOR SPLICE ENCLOSURES:
 - A) APPLY A HEAT SOURCE, AS RECOMMENDED BY THE MANUFACTURER, TO SHRINK THE HEAT SHRINKABLE TUBING TO PROVIDE A SECURE FIT AROUND THE CABLES AND PORTS.

 B) PERFORM A PRESSURIZATION FLASH TEST UPON CONCLUSION OF THE SPLICING AND PRIOR TO THE FINAL PLACEMENT OF THE ENCLOSURE.

ATKINS 1616 EAST MILLBROOK ROAD, SUITE 310 RALEIGH, NORTH CAROLINA 27609 (919) 876-6888 NCBEES #F-0326



High Point Signal System
Aerial Fiber-Optic Cable
Storage & Splice Enclosures

Division 7 Guilford County High Point

PLAN DATE: June 2015 REVIEWED BY: HA Badgett

PREPARED BY: BJ Slocum REVIEWED BY: SG Haynie

REVISIONS INIT. DATE

SEAL
O19962

Docusigned by:

Alf Badgatt

CADD Filename: ITS-5.12.dgn