
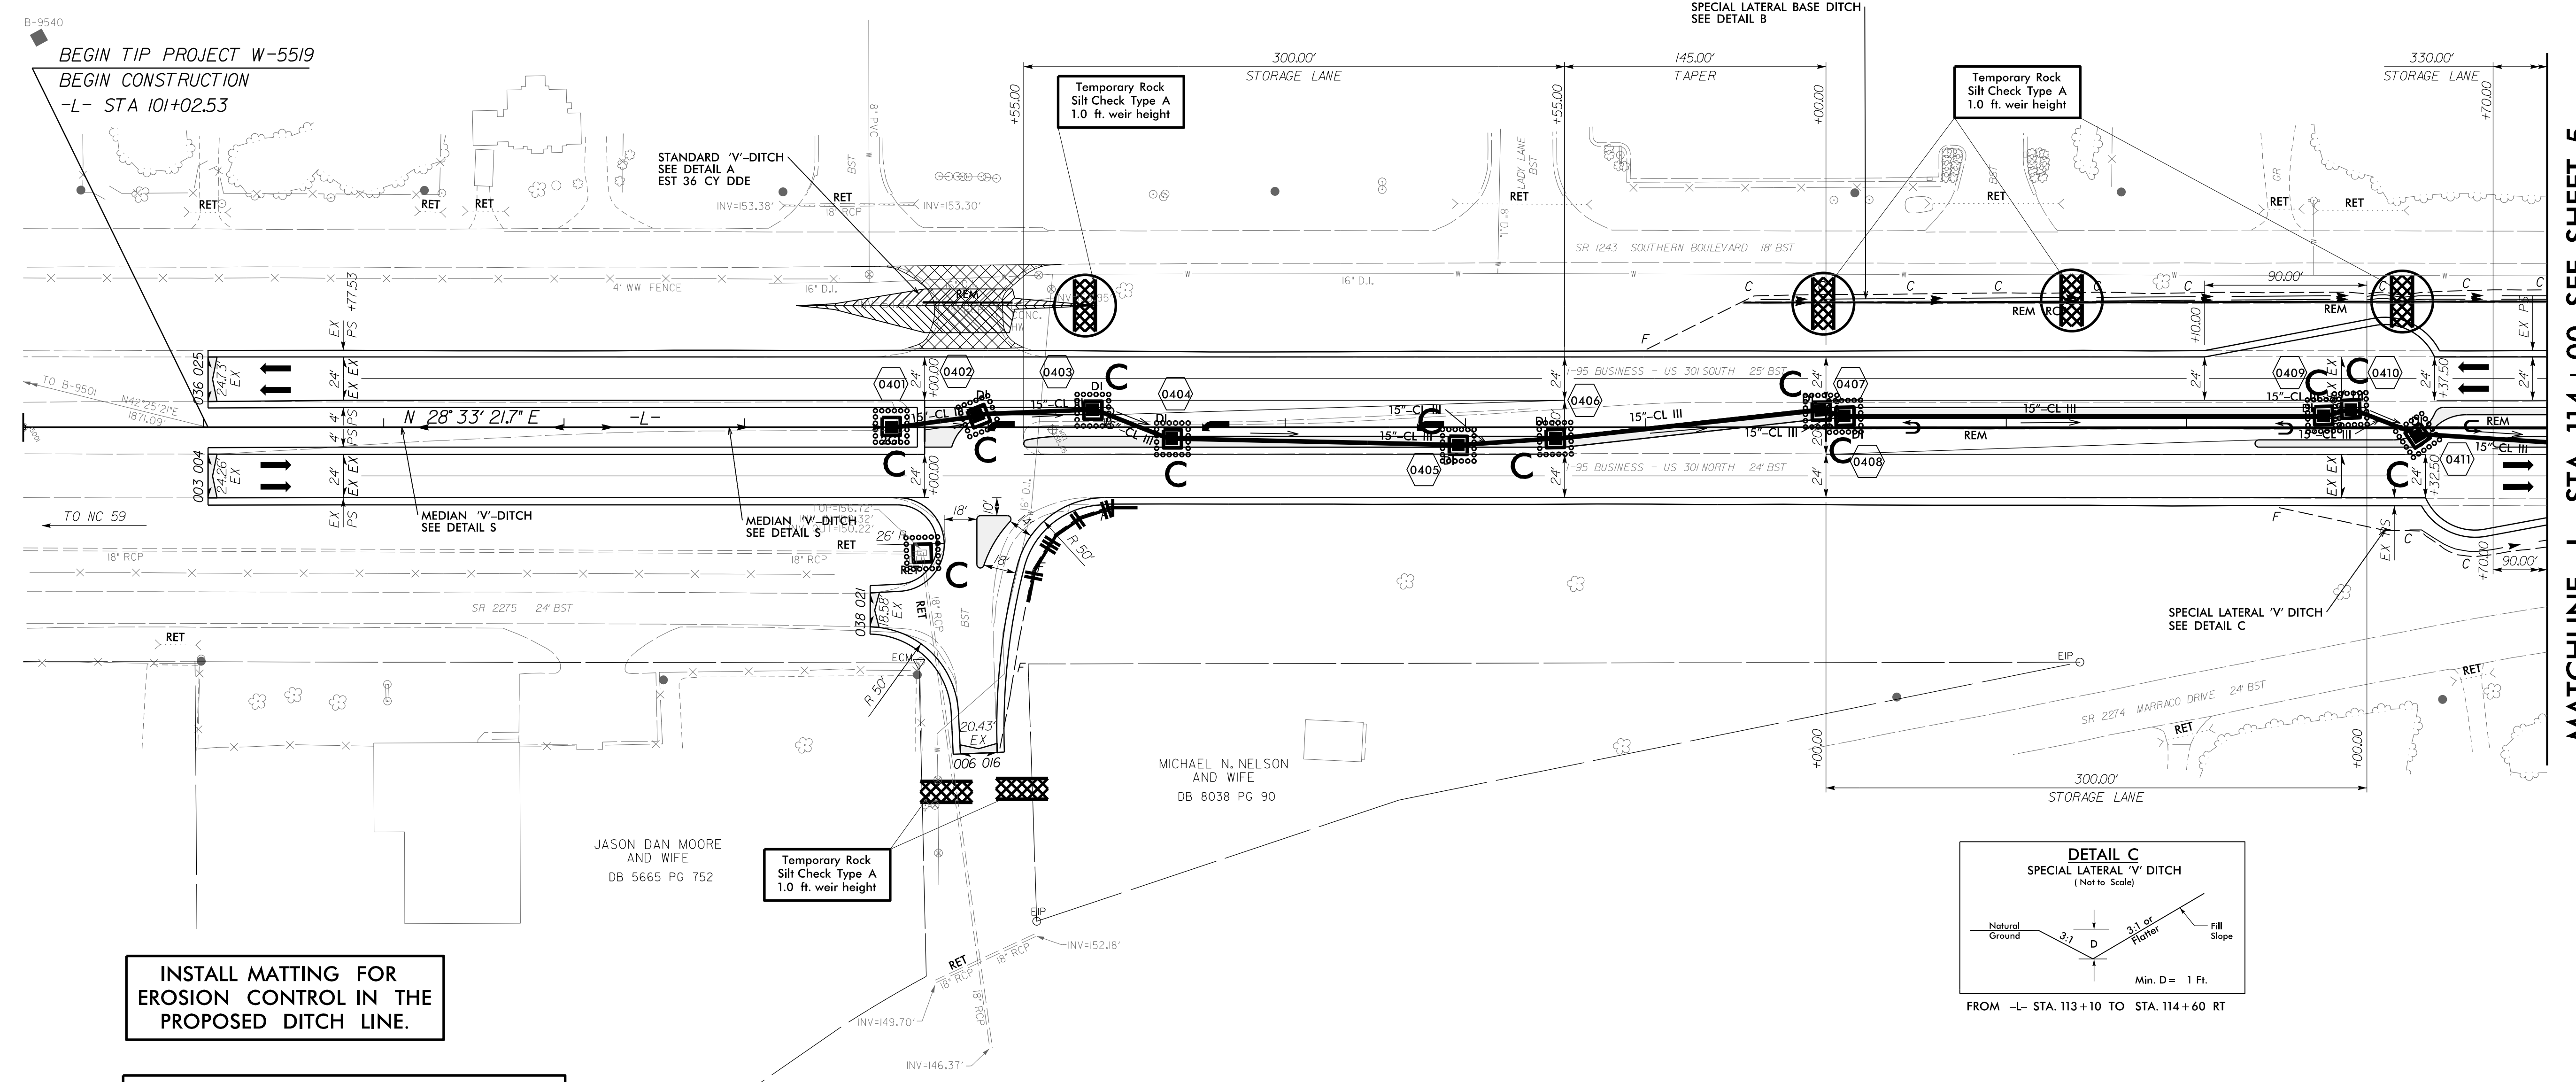
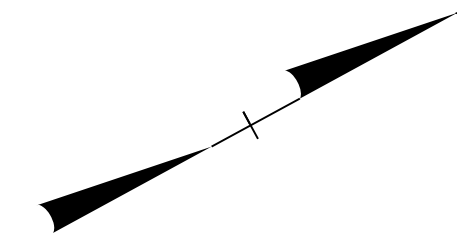
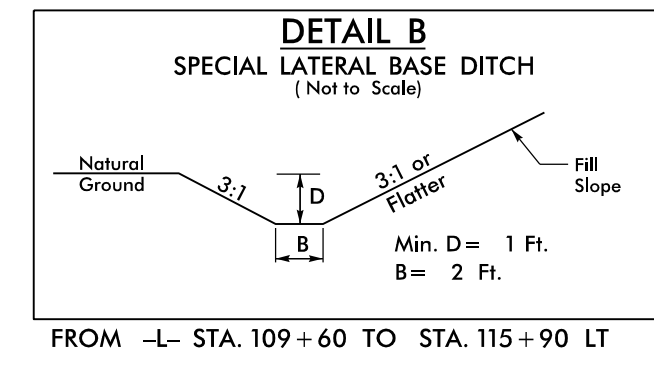
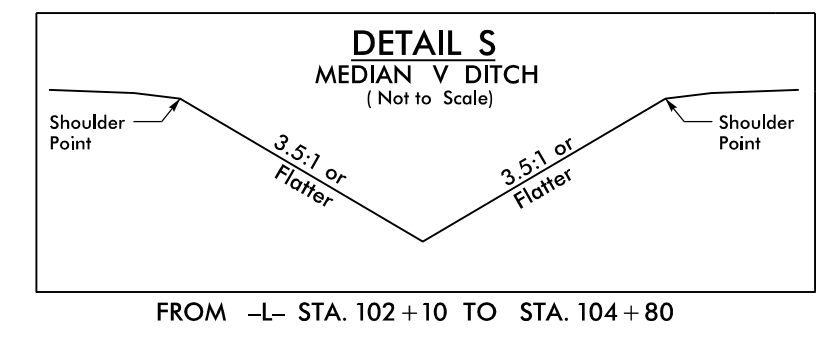



NOTE:
SILT FENCE AND COIR FIBER WATTLE BREAKS
SHALL BE INSTALLED AS DIRECTED BY ENGINEER.

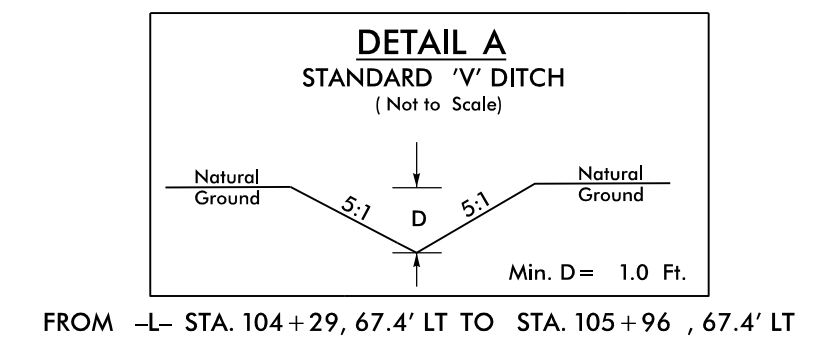

INSTALL MATTING FOR
EROSION CONTROL IN THE
PROPOSED DITCH LINE.

For Slopes Excavated Greater Than 10 feet
Install Matting for Erosion Control on
Entire Slope as Work Allows.

DATUM DESCRIPTION
THE LOCALIZED COORDINATE SYSTEM DEVELOPED FOR THIS PROJECT IS BASED ON THE STATE PLANE COORDINATES ESTABLISHED BY NCGS FOR MONUMENT "B-9501" WITH NAD 83/NA 2011 STATE PLANE GRID COORDINATES OF NORTHING: 435297.993(FT) EASTING: 2020411.296(FT) ELEVATION: 169.30(FT) THE AVERAGE COMBINED GRID FACTOR USED ON THIS PROJECT (GROUND TO GRID) IS: 0.99987968 THE N.C. LAMBERT GRID BEARING AND LOCALIZED HORIZONTAL GROUND DISTANCE FROM

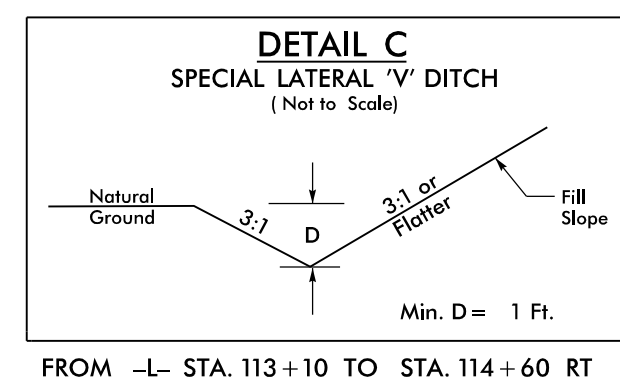

MATCHLINE -L- STA 114+00 SEE SHEET 5

FOR DITCH DETAILS SEE SHEET 2-
FOR DIRECTIONAL CROSSOVER AND MEDIAN U-TURN
DETAILS SEE SHEETS 2-C THRU 2-F

8/17/99
8/14/2015
R:\Projects\W-5519_REL_PSH28_FINAL.dgn
localluser