
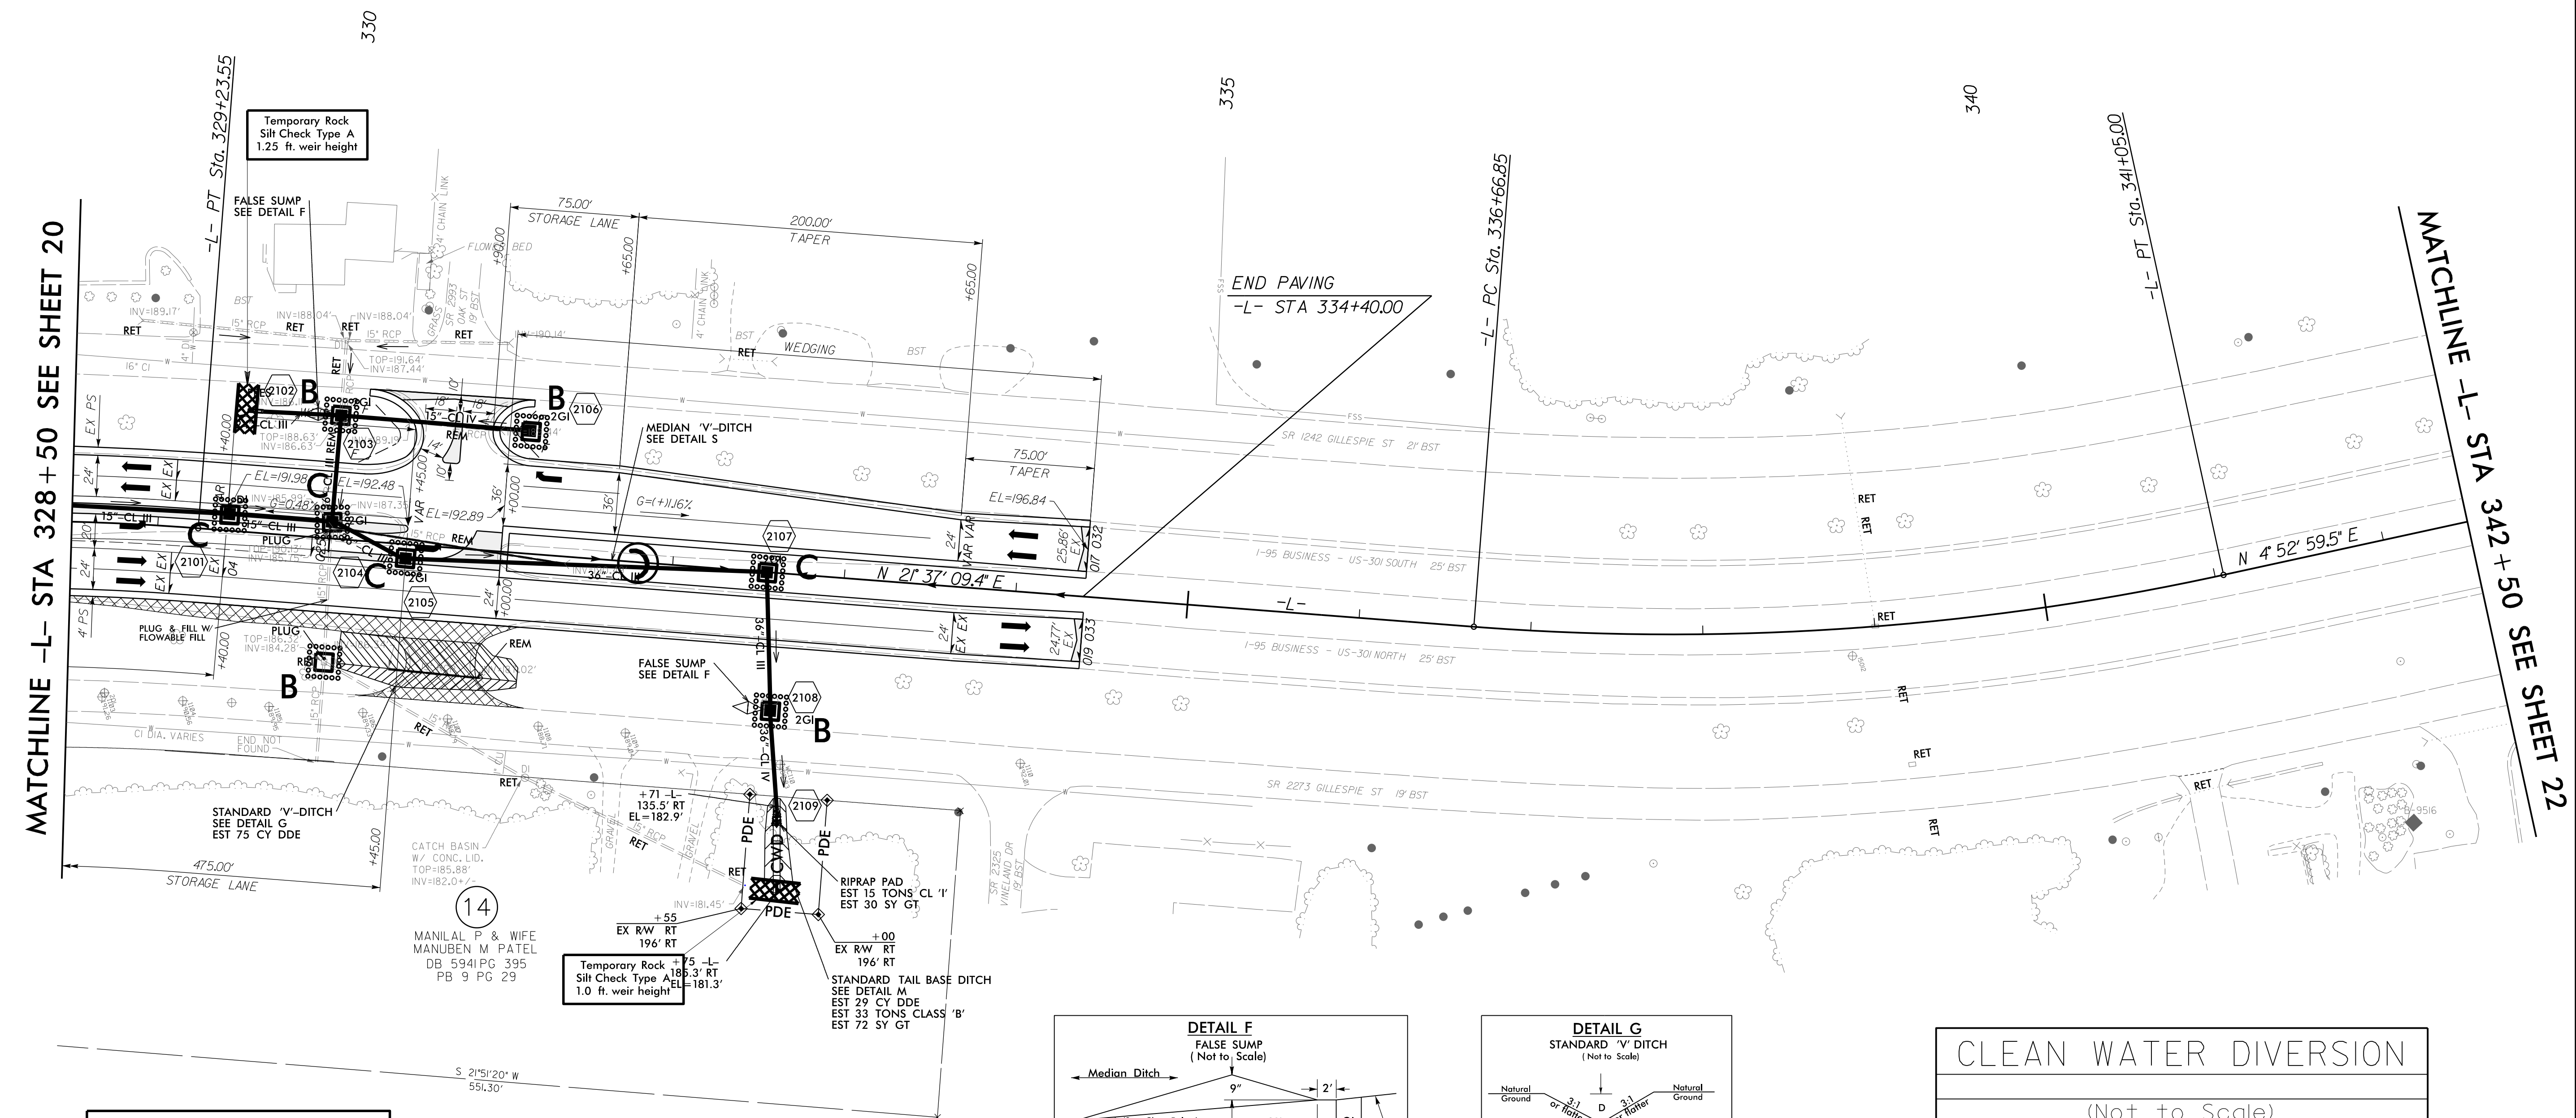


-L-
 PI Sta 326+78.01
 $\Delta = 18' 55" 53.1" (RT)$
 $D = 3' 49" 11.0"$
 $L = 495.62'$
 $T = 250.09'$
 $R = 1,500.00'$

NOTE:
 SILT FENCE AND COIR FIBER WATTLE BREAKS
 SHALL BE INSTALLED AS DIRECTED BY ENGINEER.

-L-
 PI Sta 338+87.49
 $\Delta = 16' 44" 09.9" (LT)$
 $D = 3' 49" 11.0"$
 $L = 438.15'$
 $T = 220.65'$
 $R = 1,500.00'$

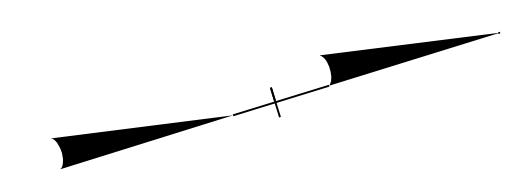






MATCHLINE -L- STA 328+50 SEE SHEET 20

MATCHLINE -L- STA 342+50 SEE SHEET 22

INSTALL MATTING FOR EROSION CONTROL IN THE PROPOSED DITCH LINE.

For Slopes Excavated Greater Than 10 feet Install Matting for Erosion Control on Entire Slope as Work Allows.

Place Matting for Erosion Control in Temporary Ditches and Diversions.

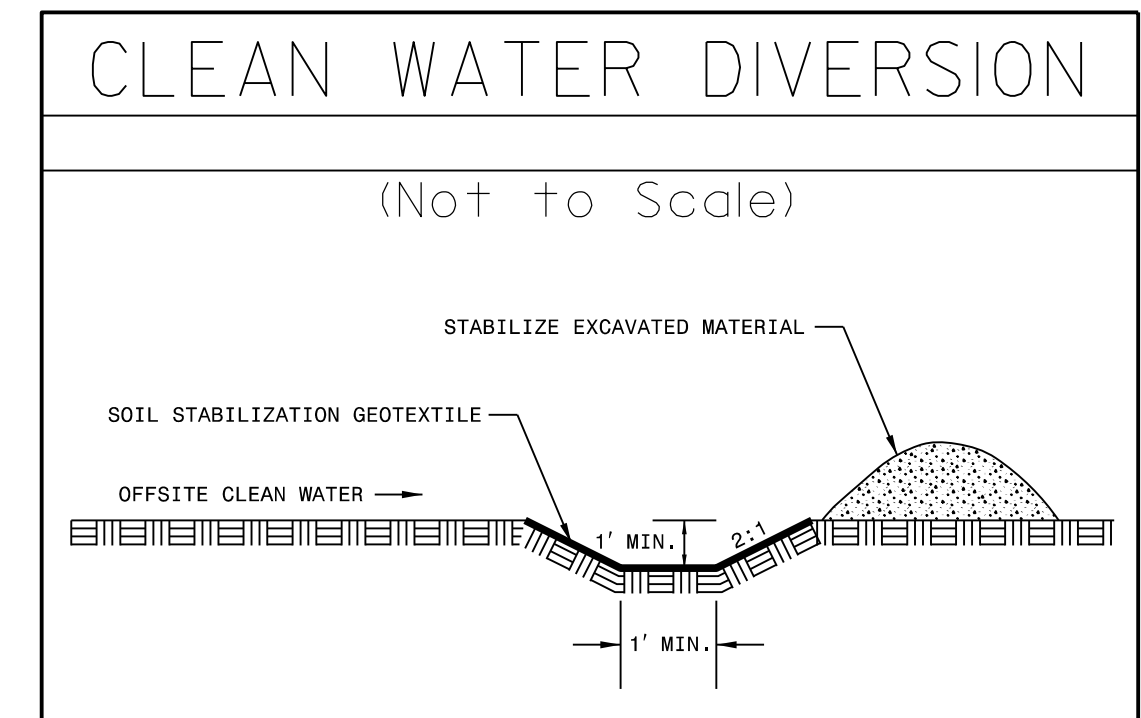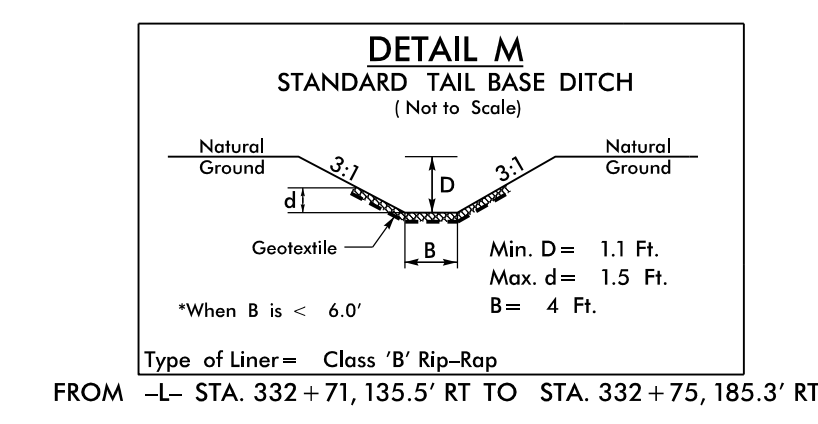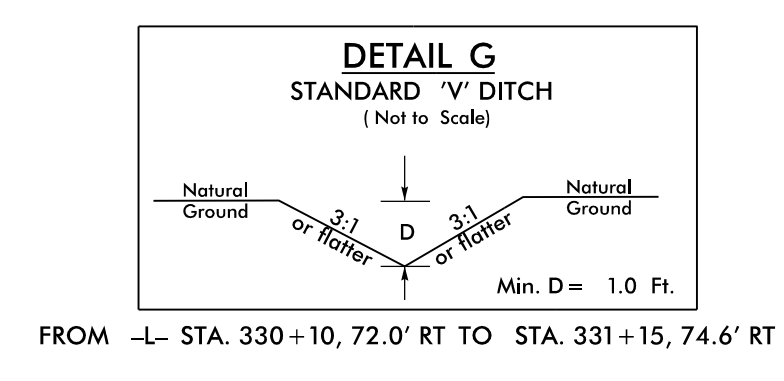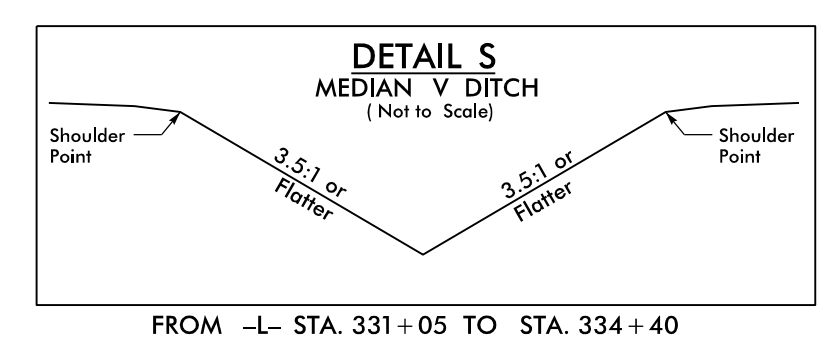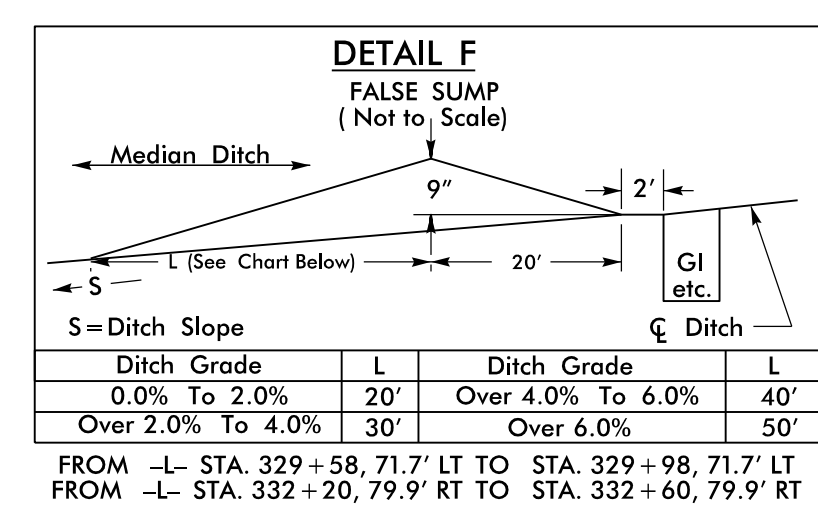

8/17/99
 R:\14\2015\Projects\W-5519_REL\PSH45_FINAL.dgn
 locauser