

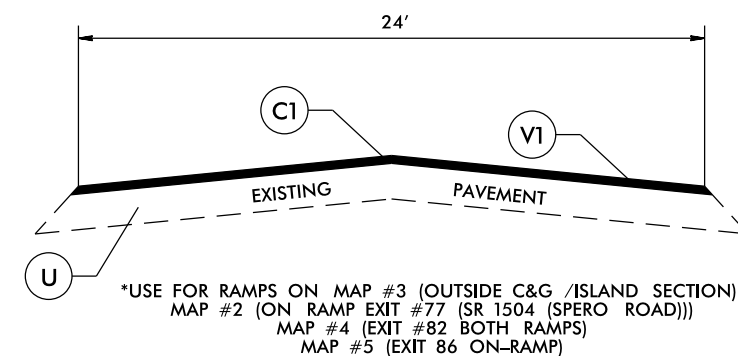
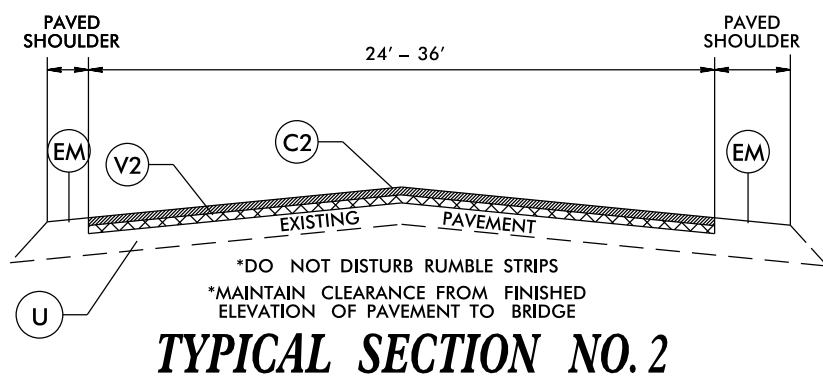


TYPICAL SECTION NO. 4

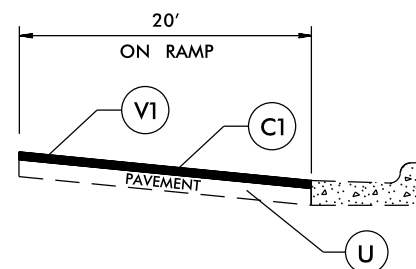

TYPICAL SECTION NO. 5

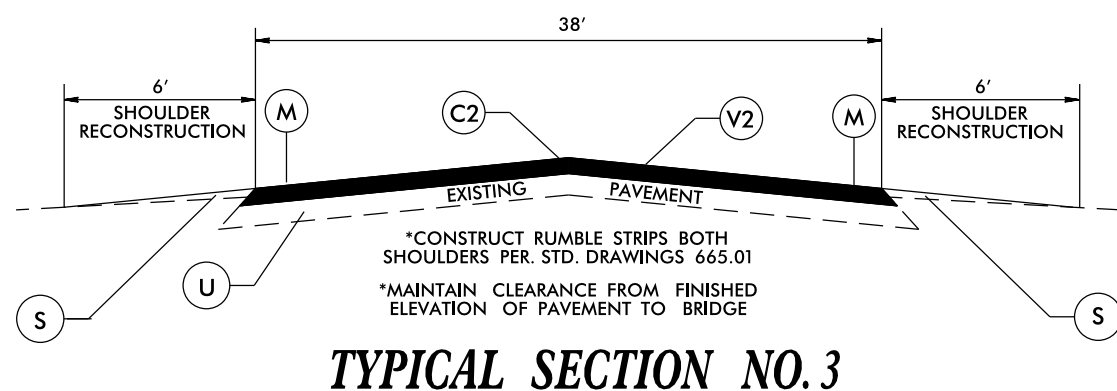

TYPICAL SECTION NO. 6

*USE FOR RAMP ON MAP #4
 (BEYOND CONCRETE ISLAND)
 (EXIT #81 ON RAMP)

PAVEMENT SCHEDULE

C1	PROP. APPROX. 1.50" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD.
C2	PROP. APPROX. 2.0" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 224 LBS. PER SQ. YD.
EM	EXISTING MILLED RUMBLE STRIPS
M	PROP. MILLED RUMBLE STRIP
S	AGGREGATE SHOULDER BORROW
U	EXISTING PAVEMENT.
V1	MILLING 1.50"
V2	MILLING 2.00"

040397

20-NOV-2015 14:42
 I:\P-5763_1-5737_Resources\I-5763_1-5737.dgn
 I:\P-5763_1-5737_Resources\I-5763_1-5737.dgn