





**DETAIL A**  
**PATCHING EXISTING PAVEMENT**

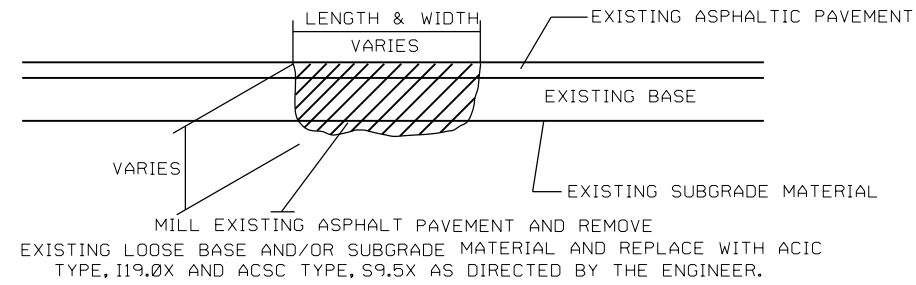

**DETAIL B**  
**ASPHALT CONCRETE SURFACE COURSE**  
**TYPE S9.5B or S9.5C. (LEVELING COURSE)**

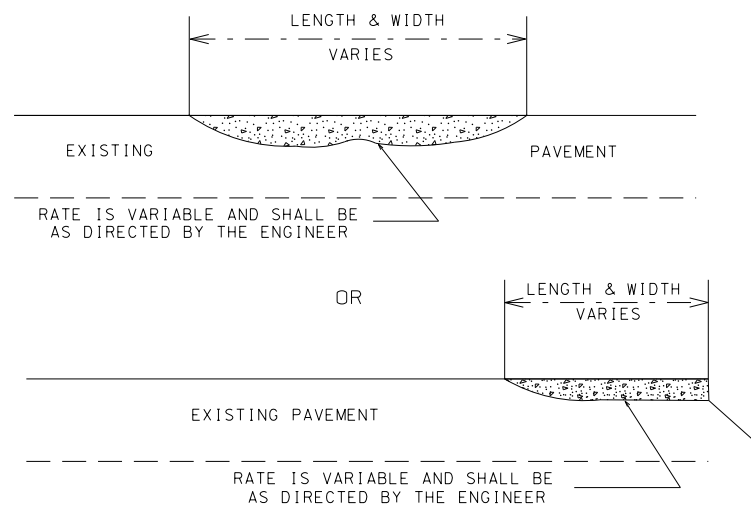

**DETAIL C**  
**MILLING BRIDGE APPROACHES**

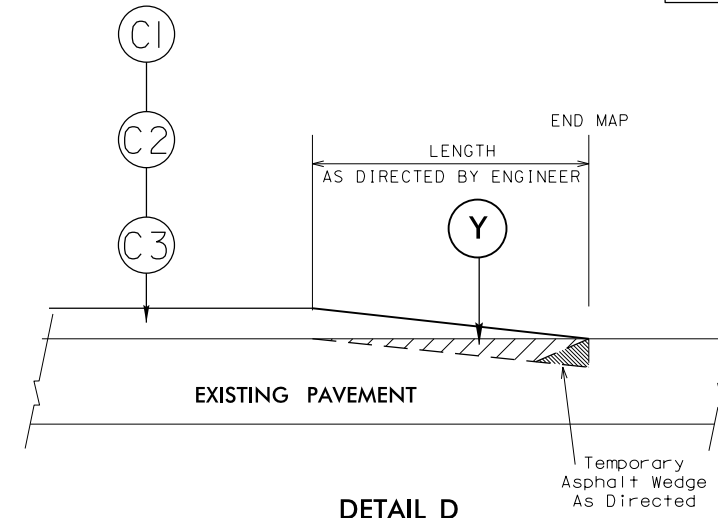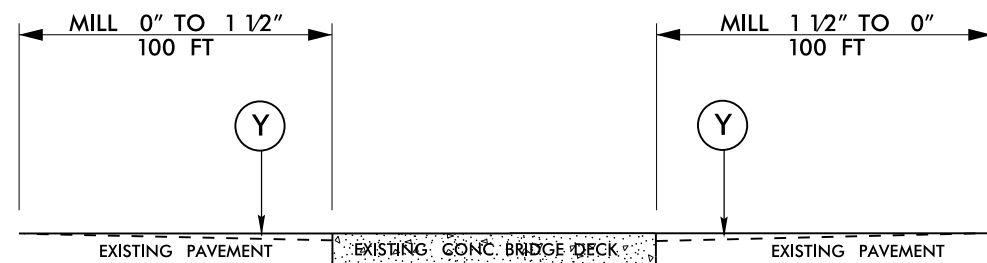

**DETAIL D**  
**TIE-IN (INCIDENTAL) MILLING DETAIL**

PAVEMENT SCHEDULE	
C1	PROP. APPROX. 1½" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD.
C2	PROP. APPROX. 1½" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD.
C3	PROP. APPROX. 1" OF ASPHALT CONC. SURFACE COURSE, TYPE SF9.5A, AT AN AVERAGE RATE OF 110 LBS PER SQ. YD.
F	ASPHALT SURFACE TREATMENT, MATCOAT # 78M STONE
T	AGGREGATE SHOULDER BORROW (SHOULDER RECONSTRUCTION)
Y	INCIDENTAL MILLING
M	MILLED RUMBLE STRIPS
Z1	MILL EXST. ASPHALT PAVEMENT APPROX. 1½ " IN DEPTH
Z2	MILL EXST. ASPHALT PAVEMENT APPROX. 2 " IN DEPTH

General Notes:

\* Pavement edge slopes are 1:1 unless specified otherwise.

2016 - 2017  
Resurfacing Program  
Typical Sections  
Lincoln County NC

Checked by:

Drawn by: GHB