



STATE	PROJECT NO.	SHEET NO.	TOTAL SHEETS
N.C.	2016CPT.10.57.10131.1, ETC.	6	
F.A. PROJECT NO.			

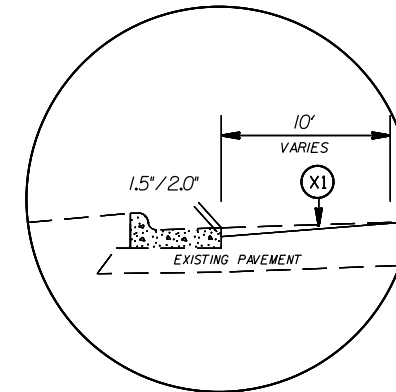


DETAIL FOR PROFILE MILLING (0" TO 1.5")
 DETAIL FOR PROFILE MILLING (0" TO 2.0")

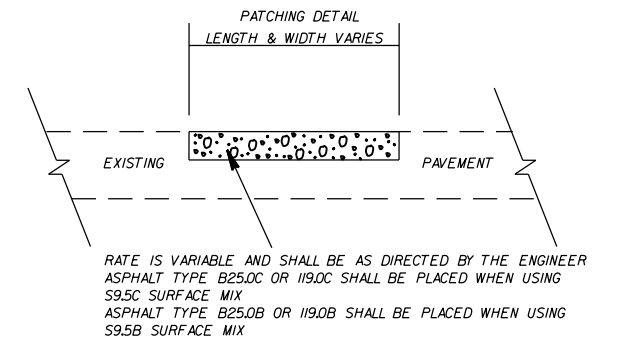


RATE IS VARIABLE AND SHALL BE AS DIRECTED BY THE ENGINEER
 ASPHALT TYPE B25.0C OR I19.0C SHALL BE PLACED WHEN USING S9.5C SURFACE MIX
 ASPHALT TYPE B25.0B OR I19.0B SHALL BE PLACED WHEN USING S9.5B SURFACE MIX


PAVEMENT SCHEDULE	
C1	PROP. APPROX. 2.0" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 224 LBS. PER SQ. YD.
C2	PROP. APPROX. 1.5" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD.
C3	PROP. APPROX. 1.5" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD.
C4	PROP. APPROX. 1.5" ASPHALT CONCRETE SURFACE COURSE, TYPE SF9.5A, AT AN AVERAGE RATE OF 165 LBS. PER SQ. YD.
C5	PROP. APPROX. 2.0" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B AT AN AVERAGE RATE OF 224 LBS. PER SQ. YD.
C6	PROP. APPROX. 1.0" ASPHALT CONCRETE SURFACE COURSE, TYPE SF9.5A, AT AN AVERAGE RATE OF 110 LBS. PER SQ. YD.
C7	PROP. ASPHALT SURFACE TREATMENT, TYPE AST DOUBLE SEAL (#14/78M), TO BE PLACED AT THE END OF EACH DAY'S PRODUCTION
D1	AST MAT COAT # 67
D2	MAT COAT # 78M
T1	SHOULDER RECONSTRUCTION
V1	MILLING BITUMINOUS PAVEMENT 2.0" DEPTH. AS DIRECTED BY THE ENGINEER
V2	MILLING BITUMINOUS PAVEMENT 1.5" DEPTH.
X1	PROFILE MILLING BITUMINOUS PAVEMENT. 0" TO 1.5"
X2	PROFILE MILLING BITUMINOUS PAVEMENT. 0" TO 2.0"
Z	FULL DEPTH RECLAMATION

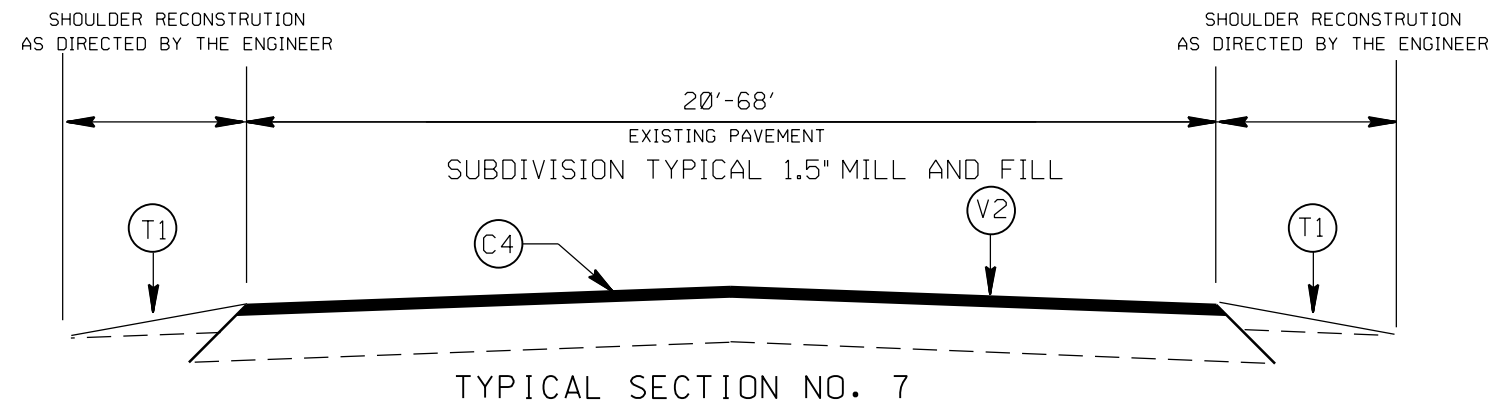


TYPICAL SECTION NO. 7

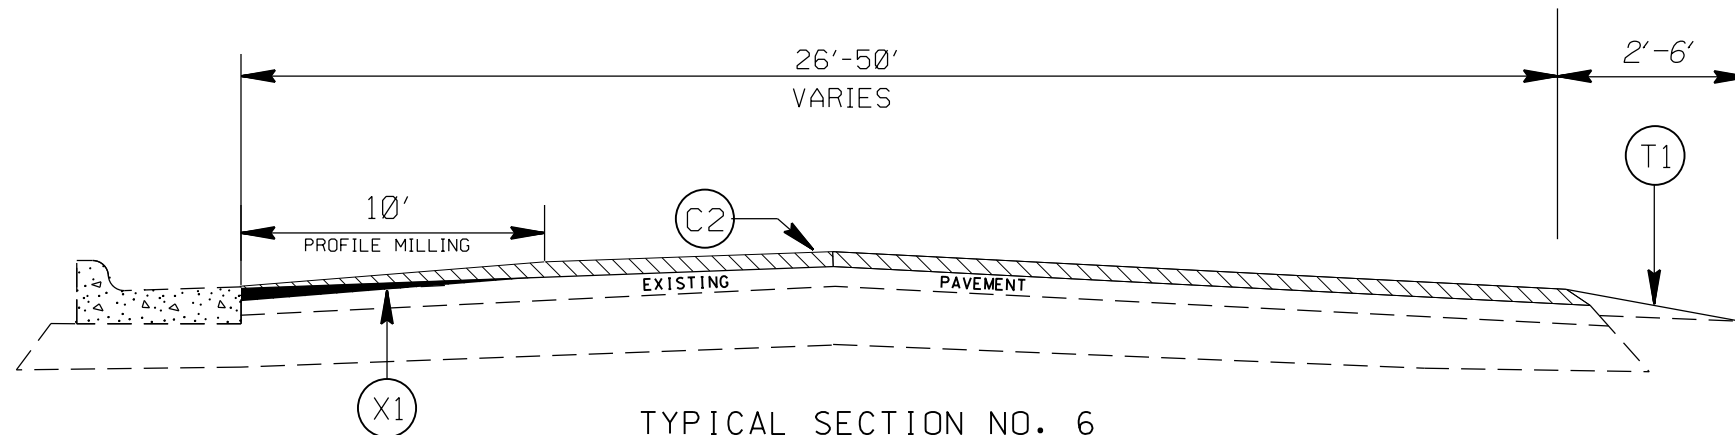

TYPICAL SECTION NO. 6

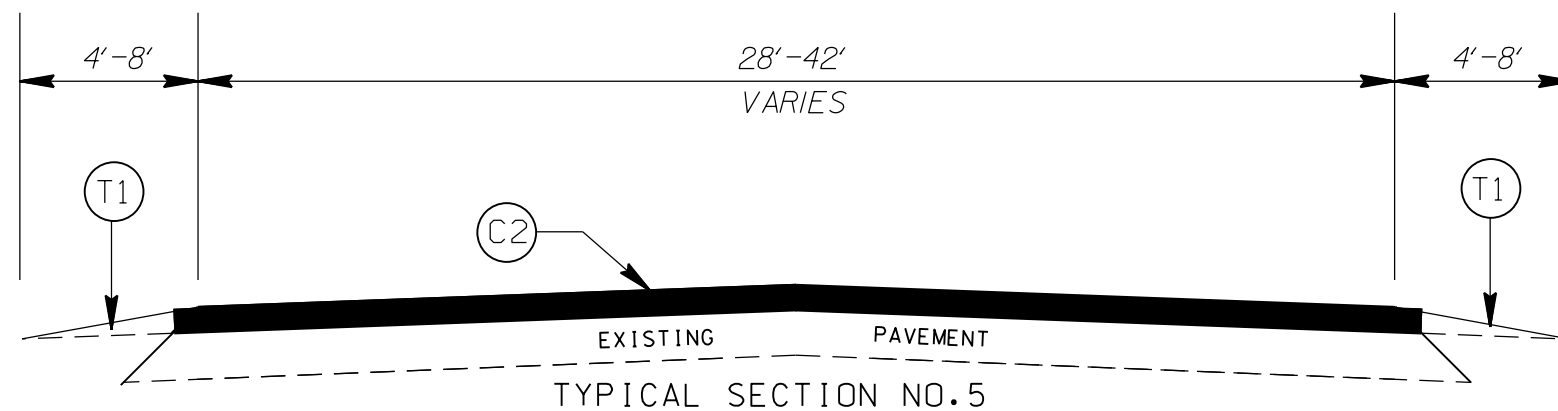

TYPICAL SECTION NO. 5

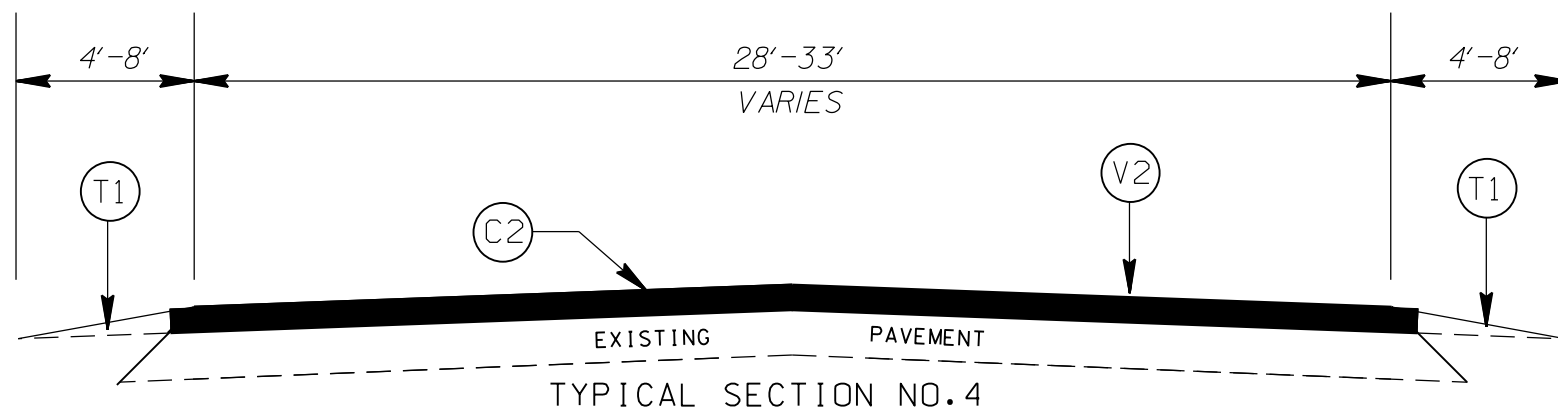

TYPICAL SECTION NO. 4

NC 73 NOTE: 1.5" MILLING FROM PAVEMENT JOINT AT LAFOREST LN. TO APPROX. 3110' WEST OR AS DIRECTED BY THE ENGINEER

CABARRUS COUNTY
 RESURFACING 2016-2017

SCALE	-NA-
DATE	3/16
DWG. BY	JDA
DESIGN BY	JDA
APPROVED	MPM



REVISIONS	