

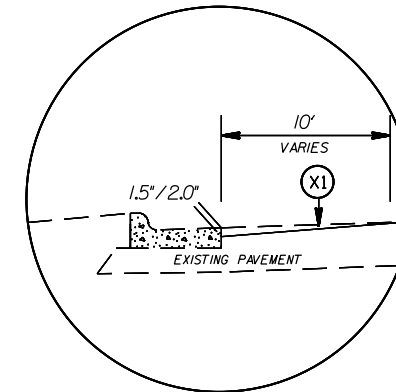



STATE	PROJECT NO.	SHEET NO.	TOTAL SHEETS
N.C.	2016CPT.10.57.10131.I, ETC.	7	
F.A. PROJECT NO.			

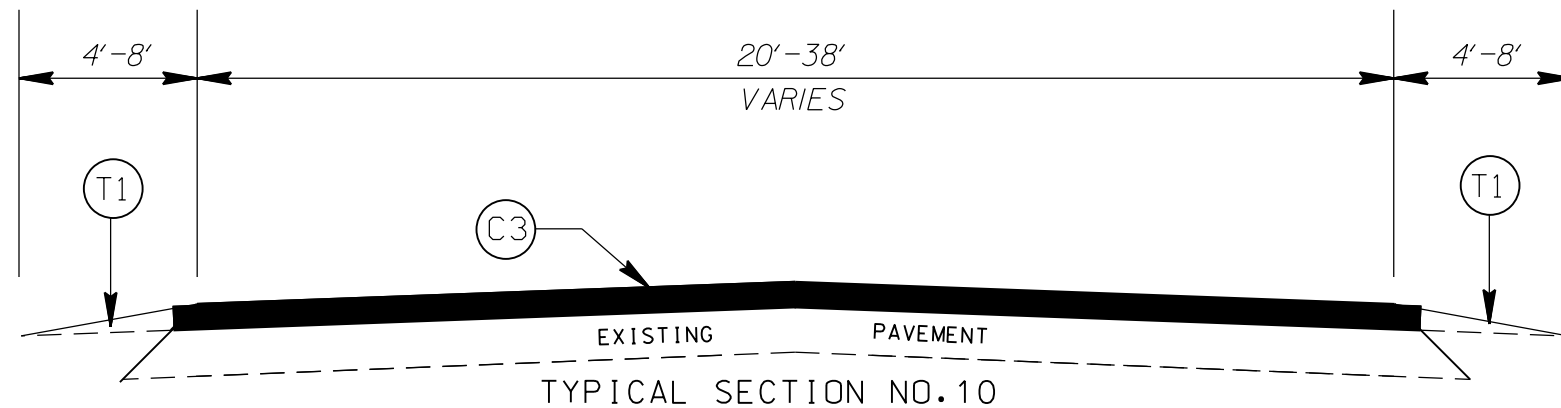


DETAIL FOR PROFILE MILLING (0" TO 1.5")  
 DETAIL FOR PROFILE MILLING (0" TO 2.0")

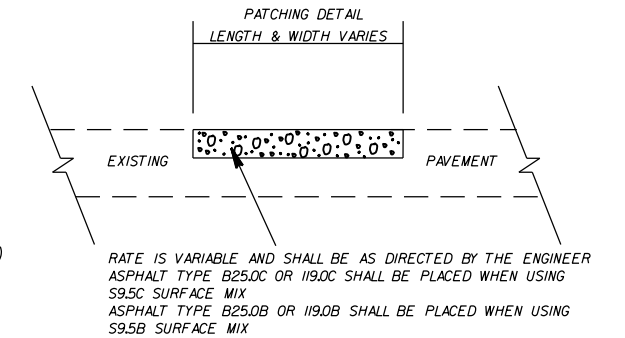

NOTE: DO NOT PAVE NEW RESURFACED SECTION OF HARRIS ROAD 1,050 +/- FEET NORTH OF THE POPLAR TENT ROAD INTERSECTION FOR 850 FEET +/- OR AS DIRECTED BY THE ENGINEER

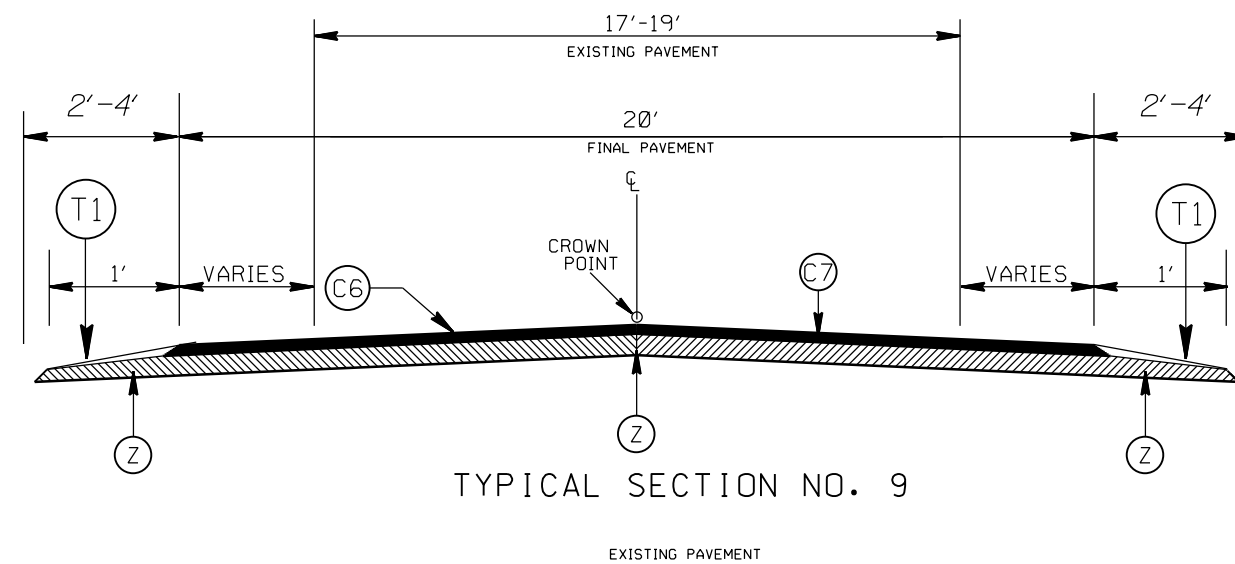

TYPICAL SECTION NO. 9

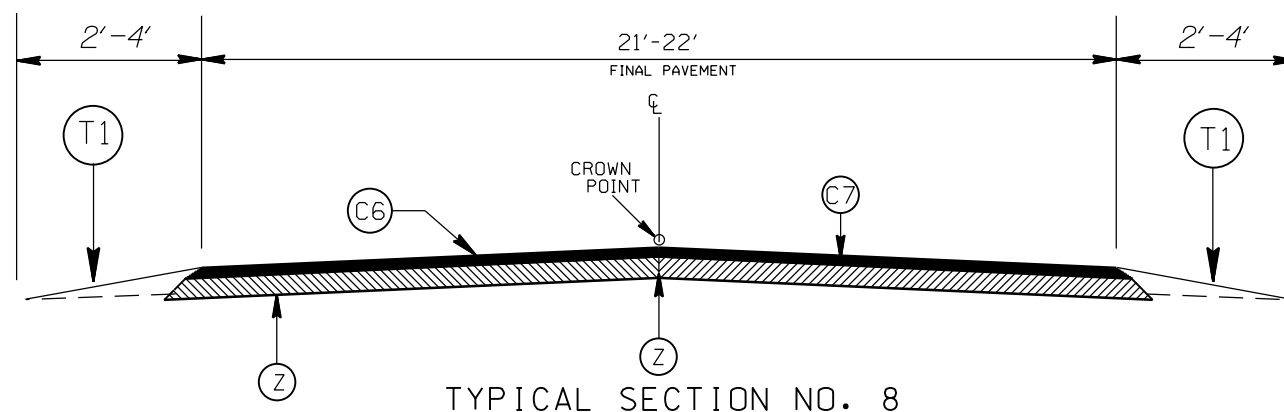

TYPICAL SECTION NO. 8

PAVEMENT SCHEDULE	
C1	PROP. APPROX. 2.0" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 224 LBS. PER SQ. YD.
C2	PROP. APPROX. 1.5" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD.
C3	PROP. APPROX. 1.5" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD.
C4	PROP. APPROX. 1.5" ASPHALT CONCRETE SURFACE COURSE, TYPE SF9.5A, AT AN AVERAGE RATE OF 165 LBS. PER SQ. YD.
C5	PROP. APPROX. 2.0" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B AT AN AVERAGE RATE OF 224 LBS. PER SQ. YD.
C6	PROP. APPROX. 1.0" ASPHALT CONCRETE SURFACE COURSE, TYPE SF9.5A, AT AN AVERAGE RATE OF 110 LBS. PER SQ. YD.
C7	PROP. ASPHALT SURFACE TREATMENT, TYPE AST DOUBLE SEAL (#14/78M), TO BE PLACED AT THE END OF EACH DAY'S PRODUCTION
D1	AST MAT COAT # 67
D2	MAT COAT # 78M
T1	SHOULDER RECONSTRUCTION
V1	MILLING BITUMINOUS PAVEMENT 2.0" DEPTH. AS DIRECTED BY THE ENGINEER
V2	MILLING BITUMINOUS PAVEMENT 1.5" DEPTH.
X1	PROFILE MILLING BITUMINOUS PAVEMENT. 0" TO 1.5"
X2	PROFILE MILLING BITUMINOUS PAVEMENT. 0" TO 2.0"
Z	FULL DEPTH RECLAMATION

CABARRUS COUNTY  
 RESURFACING 2016-2017

SCALE	-NA-
DATE	3/16
DWG. BY	JDA
DESIGN BY	JDA
APPROVED	MPM



REVISIONS	