



FINAL PAVEMENT SCHEDULE	
C1	PROP. APPROX. 2" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 224 LBS. PER SQ. YD.
C2	PROP. APPROX. 1/2" ASPHALT CONCRETE SURFACE COURSE, TYPE SA-1, AT AN AVERAGE RATE OF 50 LBS. PER SQ. YD.
T	AGGREGATE SHOULDER BORROW (SHOULDER RECONSTRUCTION)
U	EXISTING PAVEMENT
V1	0"-2" MILLED ASPHALT PAVEMENT
V2	2" MILLED ASPHALT PAVEMENT
Y	PROPOSED MILLED RUMBLE STRIPS

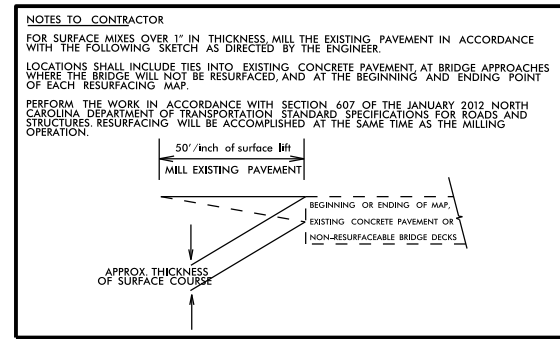


MILLING AT PAVEMENT TIE-INS DETAIL

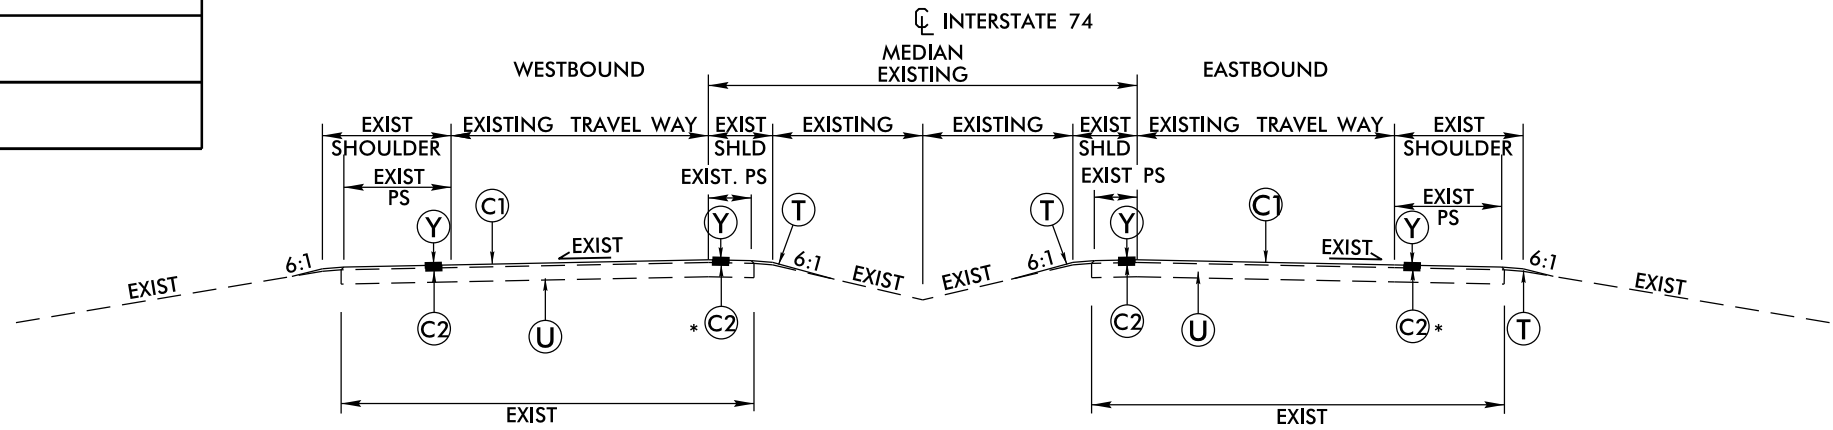

USE TYPICAL SECTION NO. 1


-L- MILE MARKER 193.3 TO MILE MARKER 199.7

\*NOTE: FILL EXISTING RUMBLE STRIPS AT BOTH INSIDE AND OUTSIDE SHOULDERS IN BOTH DIRECTIONS WITH SAND-ASPHALT MIX, TYPE SA-1

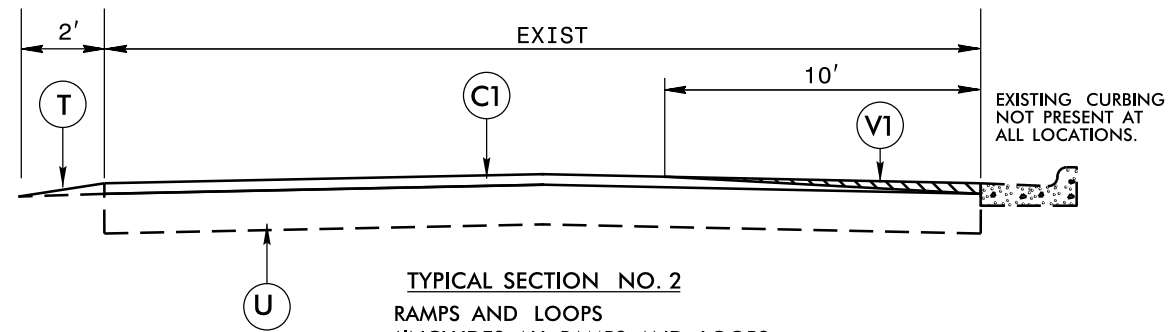


TYPICAL SECTION NO. 2

RAMPS AND LOOPS  
\*INCLUDES ALL RAMPS AND LOOPS UP TO TIE INS THE AT -Y- LINES

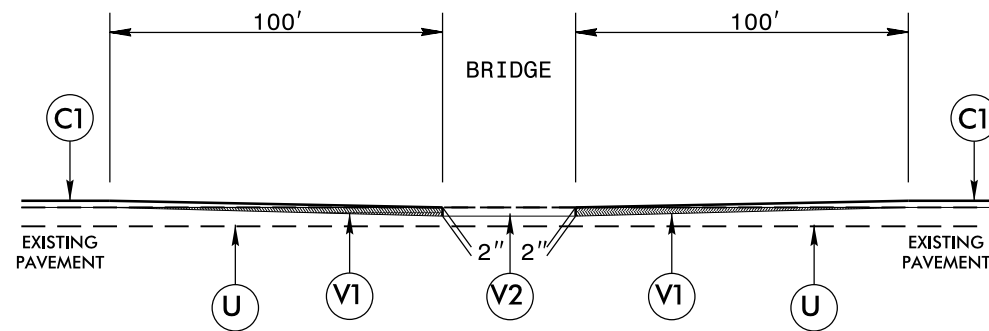

DETAIL 1

MILLING UNDER BRIDGES 476 AND 477

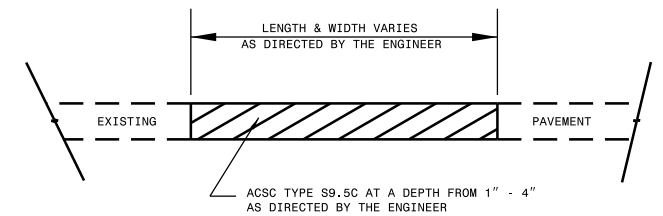

PATCHING EXISTING PAVEMENT  
PATCHING TO BE PERFORMED PRIOR TO MILL AND FILL OPERATION