

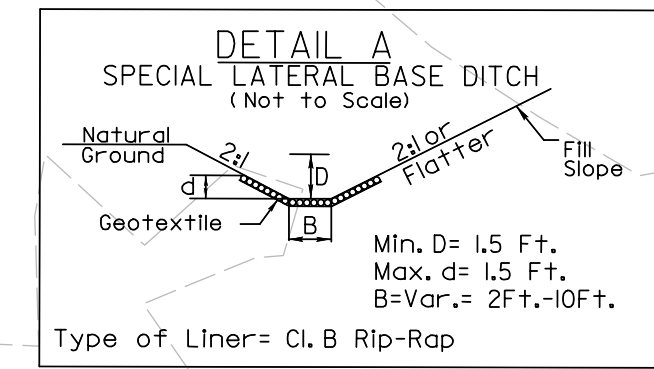


PROJECT REFERENCE NO.	SHEET NO.
U-3308	EC-14/CONST-14
RW SHEET NO.	
ROADWAY DESIGN ENGINEER	HYDRAULICS ENGINEER

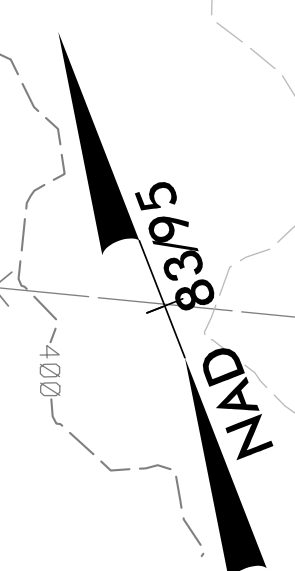

Min. D= 1.5 Ft.
 Max. d= 1.5 Ft.
 B=Var.= 2ft.-10ft.
 Type of Liner= Cl. B Rip-Rap

FROM STA. 12+00 to 20+00 -NSN- MED
 FROM STA. 22+50 to 27+00 -NSN- MED
 FROM STA. 17+00 to 20+00 -NSS- RT
 FROM STA. 23+00 to 30+00 -NSS- RT

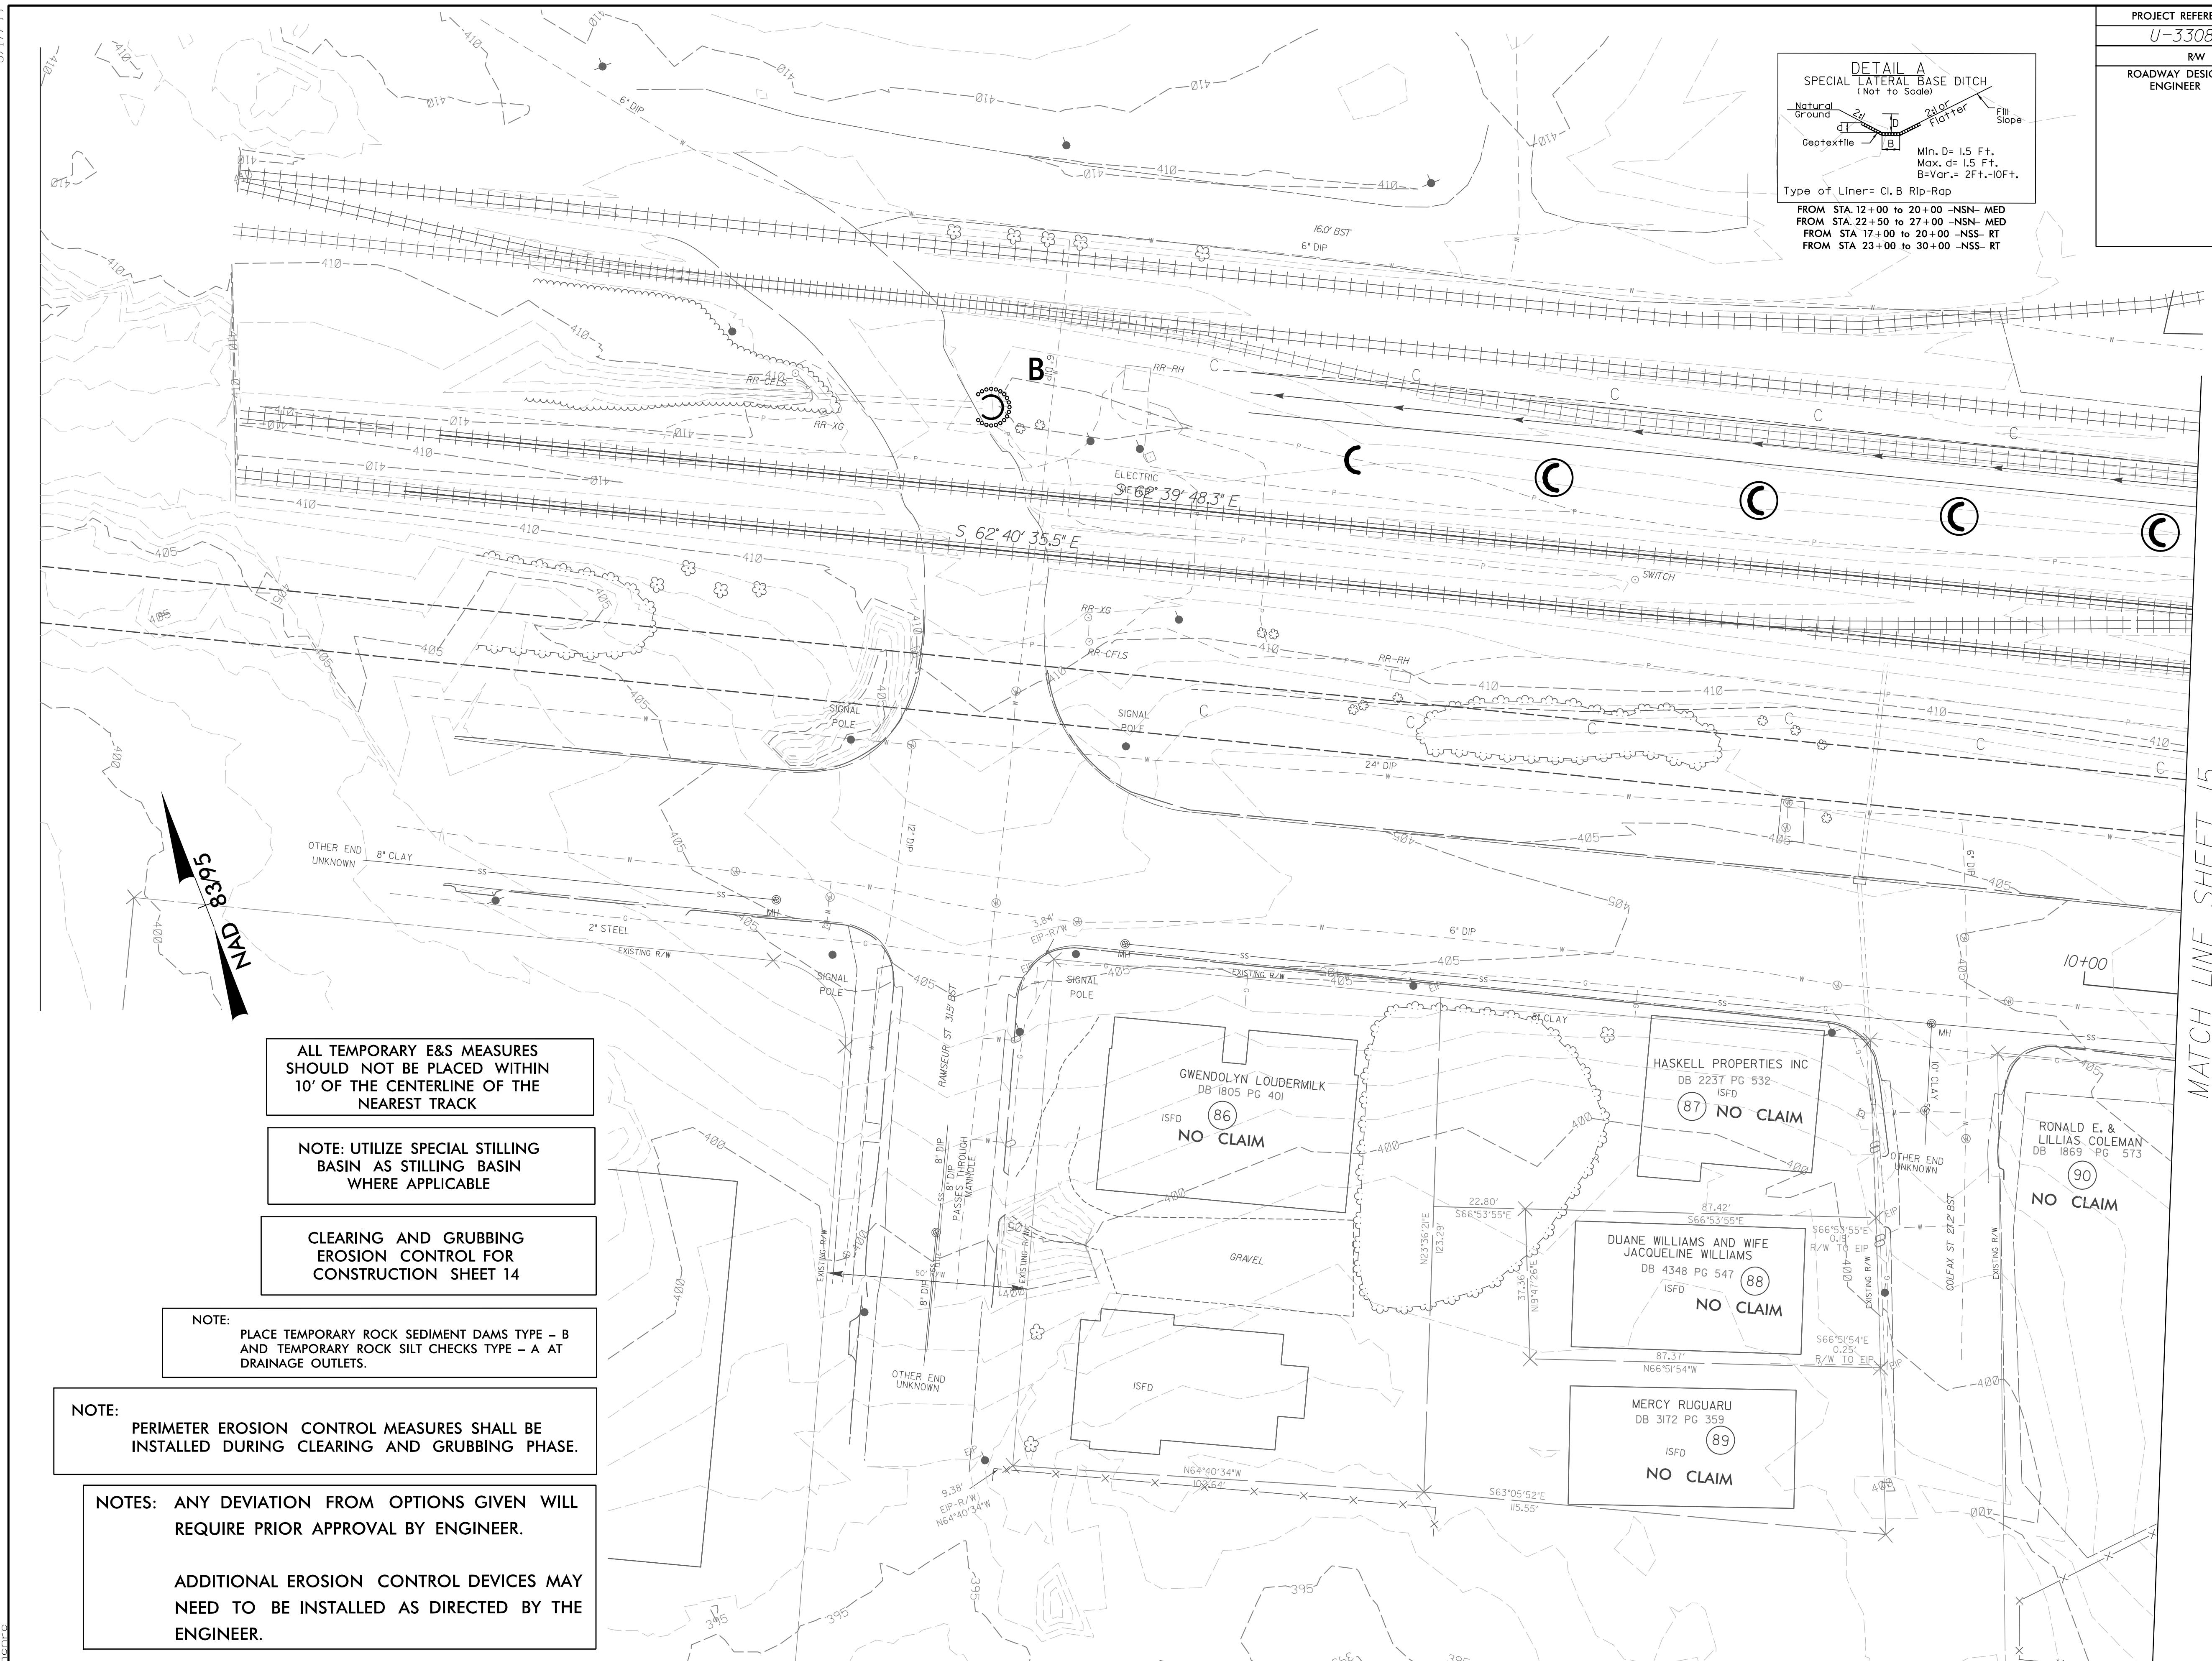

ALL TEMPORARY E&S MEASURES SHOULD NOT BE PLACED WITHIN 10' OF THE CENTERLINE OF THE NEAREST TRACK

NOTE: UTILIZE SPECIAL STILLING BASIN AS STILLING BASIN WHERE APPLICABLE

CLEARING AND GRUBBING EROSION CONTROL FOR CONSTRUCTION SHEET 14

NOTE: PLACE TEMPORARY ROCK SEDIMENT DAMS TYPE - B AND TEMPORARY ROCK SILT CHECKS TYPE - A AT DRAINAGE OUTLETS.

NOTE: PERIMETER EROSION CONTROL MEASURES SHALL BE INSTALLED DURING CLEARING AND GRUBBING PHASE.

NOTES: ANY DEVIATION FROM OPTIONS GIVEN WILL REQUIRE PRIOR APPROVAL BY ENGINEER.
 ADDITIONAL EROSION CONTROL DEVICES MAY NEED TO BE INSTALLED AS DIRECTED BY THE ENGINEER.

MATCH LINE SHEET 15

8/17/99
 4/13/2015
 RA:\ecol\proj\ECN\3308.r\dj.ec.ps14 CG.dgn