

Speed Limit	D1	D2
mph	ft	ft
40	250	80
45	300	90
50	355	100
55	420	110

"Stretch" Operation

 $L1 = 6ft \times 6ft$ 

 $L2 = 6ft \times 6ft$ 


Wired in series

Wired in series

# Low Speed Detection (≤35 mph)


OR

PROJECT REFERENCE NO. I-5734 & I-5762

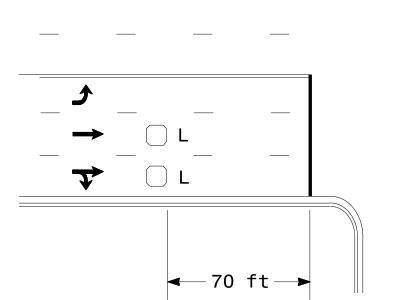

Wired in series

L = 6ft X 6ft

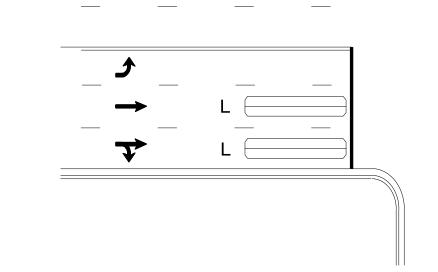

L = 6ft X 40ftQuadrupole loop, wired separately

Right Turn Lane Detection

L2 = 6ft X 6ft [Minimum] Presence loop


L1 = 6ft X 40ft Quadrupole loop

Wired separately

### Left Turn Lane Detection

High Speed Detection

(≥40 mph)

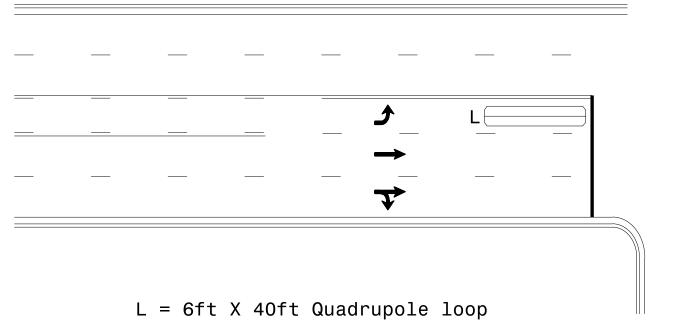

 $L = 6ft \times 6ft$ 

Wired in series for TS1

Wired separately for TS2,


170, and 2070L Controllers

Controllers


Presence Loop Detection

**←** 50 ft **→** L1 = 6ft X 15ft Queue detector L2 = 6ft X 40ft Quadrupole loop


Queue Loop Detection

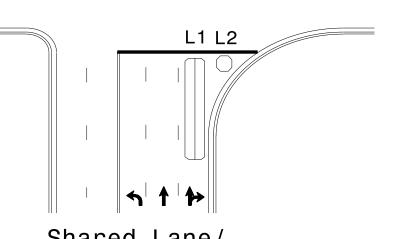


Shared Lane/ Wide Radius Turn

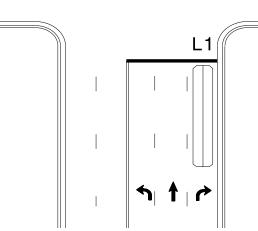

Standard Turn




Wide Radius Turn




Channelized Turn

### Side Street Detection

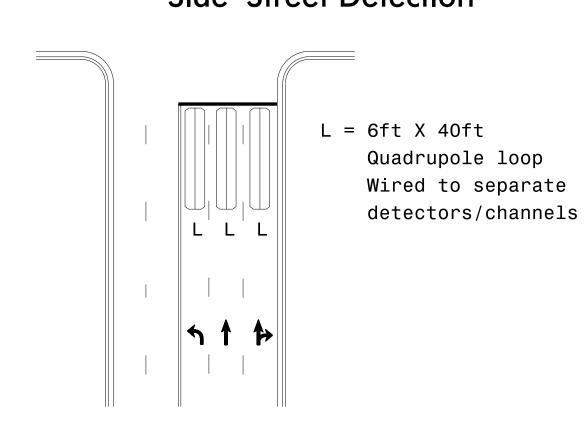

## Presence Loop Placement at Stop Lines

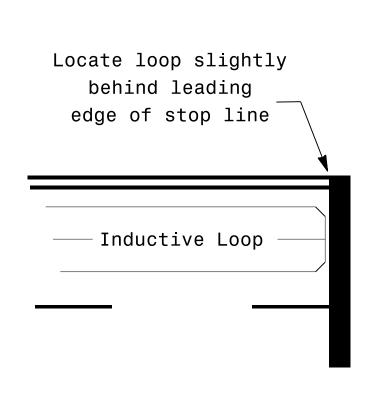

Note:

Loop may be located in advance of stop line under any of the following conditions:

- 1) stop line is greater than 15' from edge of intersecting roadway
- 2) loop detects a permissive or protected/permissive left turn
- 3) for an exclusive right turn lane

#### Recommended Number of Turns

Single 6' X 6' loop (when wired separately):

ich wired Separatery).		
Length of Lead-in ft	Number of Turns	
< 250	3	
250-375	4	
375-525	5	
> 525	6	

Quadrupole loops: Use 2-4-2 turns

6' X 15' Loops: Lead-in < 150', use 2 turns Lead-in > 150', use 3 turns



SCALE

N/A

Typical Signal Loop Locations

PLAN DATE: January 2015 REVIEWED BY: REVIEWED BY: PLA REVISIONS INIT. DATE

PL Alexander