


SURFACING SCHEDULE

PROJECT REFERENCE NO.		SHEET NO.
2017CPT.14.01.10441.1.ETC		22
STATE PROJECT	F.A. PROJECT NO.	DESCRIPTION

TYPICAL 9

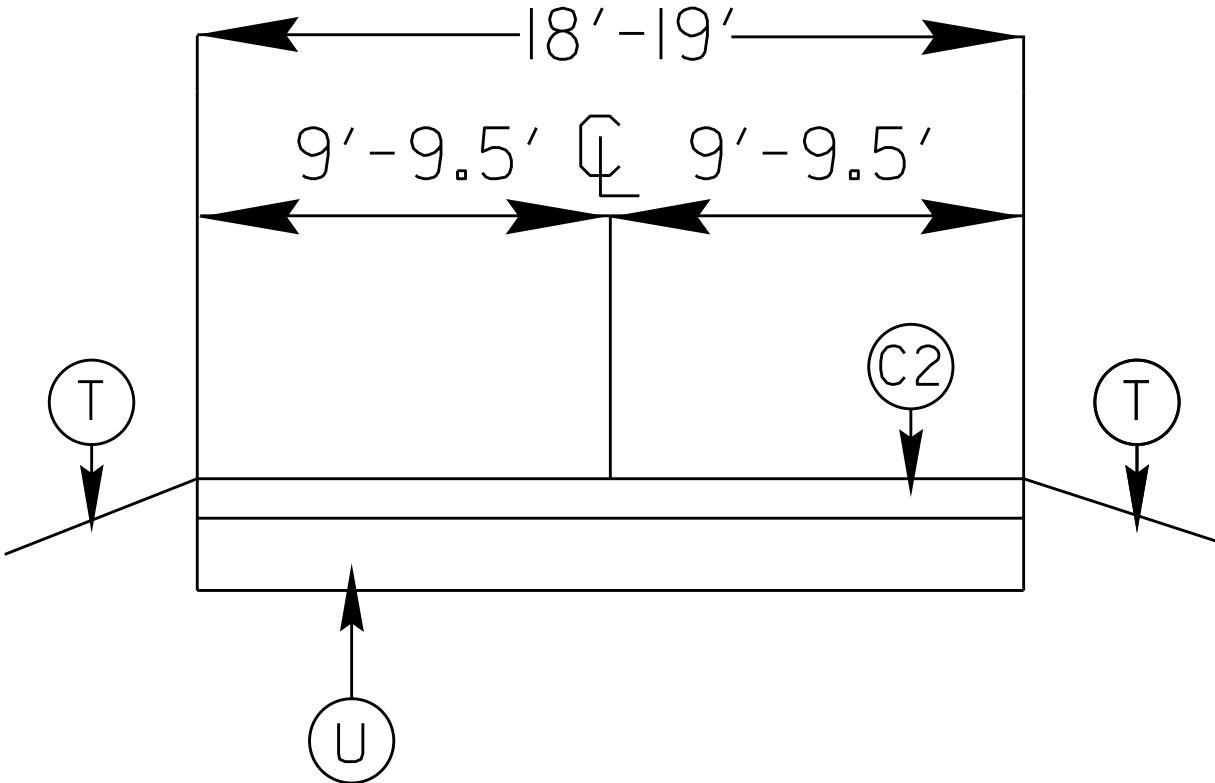

ITEM NO	DESCRIPTION
C1	PROP. APPROX. 3/4" ASPHALT CONCRETE SURFACE COURSE, (LEVELING) TYPE SF9.5A AT AN AVERAGE RATE OF 82.5 LBS.PER.SQ.YD
C2	PROP. APPROX. 1 1/4" ASPHALT CONCRETE SURFACE COURSE, TYPE SF9.5A, AT AN AVERAGE RATE OF 137.5 LBS. PER SQ YD
C3	PROP. APPROX. 1 1/2" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD
C4	PROP. APPROX. 1 1/2" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 168 LBS. PER SQ YD
D1	PROP. APPROX. 3" ASPHALT CONCRETE INTERMEDIATE COURSE,TYPE I19.OB,AT A AVERAGE RATE OF 342 LBS PER SQ.YD.
D2	PROP. APPROX. 3" ASPHALT CONCRETE INTERMEDIATE COURSE,TYPE I19.OC,AT A AVERAGE RATE OF 342 LBS PER SQ.YD.
R	MILLED RUMBLE STRIPS AS DIRECTED BY PROJECT ENGINEER
T	SHOULDER RECONSTRUCTION
V1	MILLED ASPHALT PAVEMENT 1 1/2" IN DEPTH IN LOCATIONS AS DIRECTED BY PROJECT ENGINEER
V2	MILLED ASPHALT PAVEMENT 3" IN DEPTH IN LOCATIONS AS DIRECTED BY PROJECT ENGINEER
V3	MILLED ASPHALT PAVEMENT 4 1/2" IN DEPTH IN LOCATIONS AS DIRECTED BY PROJECT ENGINEER
U	EXISTING ASPHALT