


6/2/09


| PAVEMENT SCHEDULE | |
|-----------------------|--|
| FINAL PAVEMENT DESIGN | |
| C1 | PROP. APPROX. 2½" ASPHALT CONCRETE SURFACE COURSE, TYPE SF9.5A, AT AN AVERAGE RATE OF 137.5 LBS. PER SQ. YD. IN EACH OF TWO LAYERS. |
| C2 | PROP. VAR. DEPTH ASPHALT CONCRETE SURFACE COURSE, TYPE SF9.5A, AT AN AVERAGE RATE OF 110 LBS. PER SQ. YD. PER 1" DEPTH. TO BE PLACED IN LAYERS NOT TO EXCEED 1½" IN DEPTH. |
| E1 | PROP. APPROX. 4½" ASPHALT CONCRETE BASE COURSE, TYPE B25.0B, AT AN AVERAGE RATE OF 513 LBS. PER SQ. YD. |
| T | EARTH MATERIAL. |

NOTE: PAVEMENT EDGE SLOPES ARE 1:1 UNLESS SHOWN OTHERWISE.

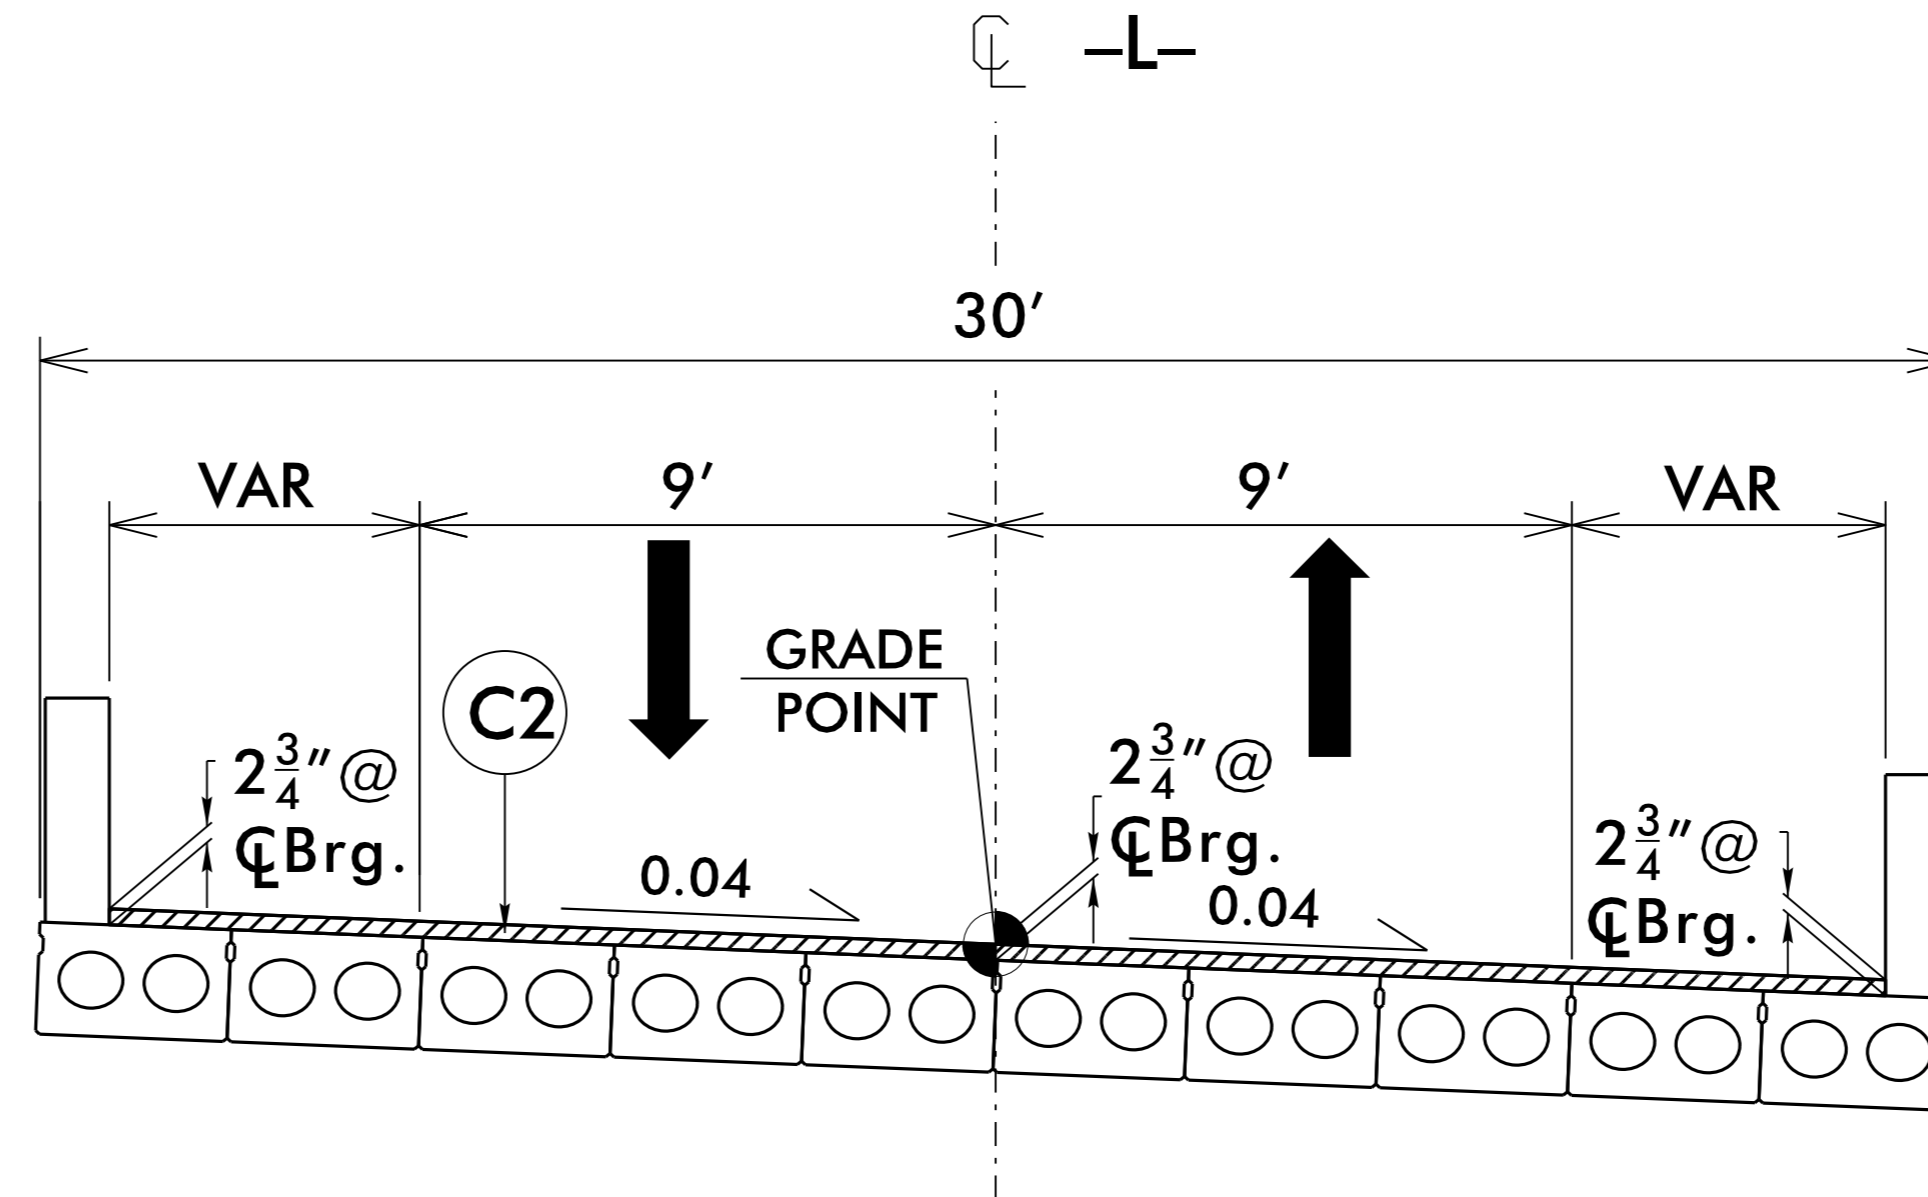


TYPICAL SECTION ON STRUCTURE

-L- STA 12+04.62 TO 12+57.98

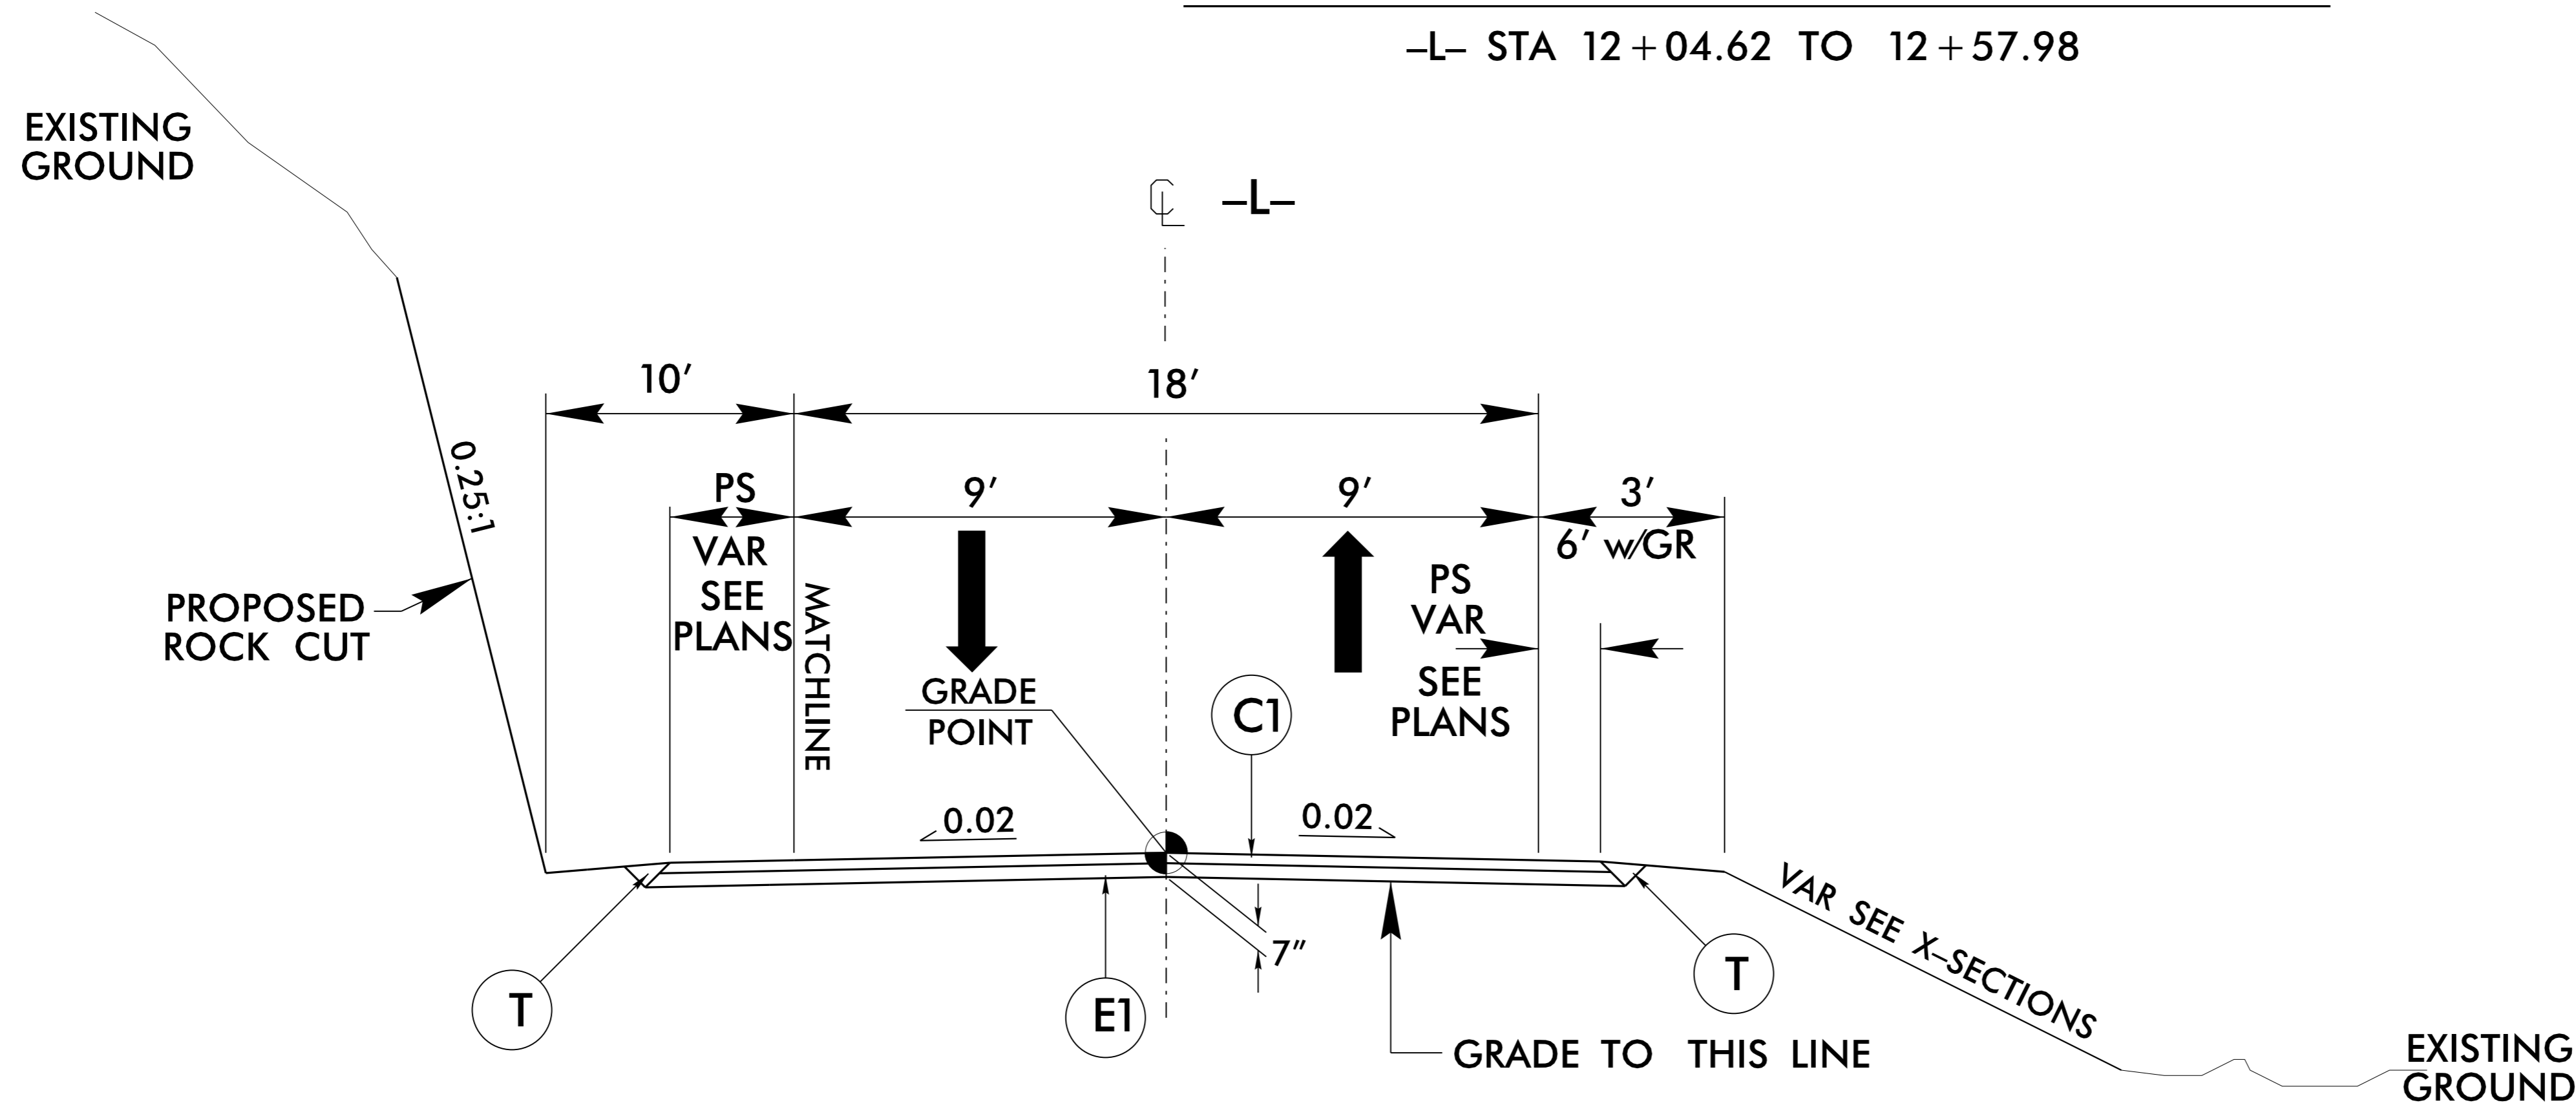

TYPICAL SECTION NO. 1

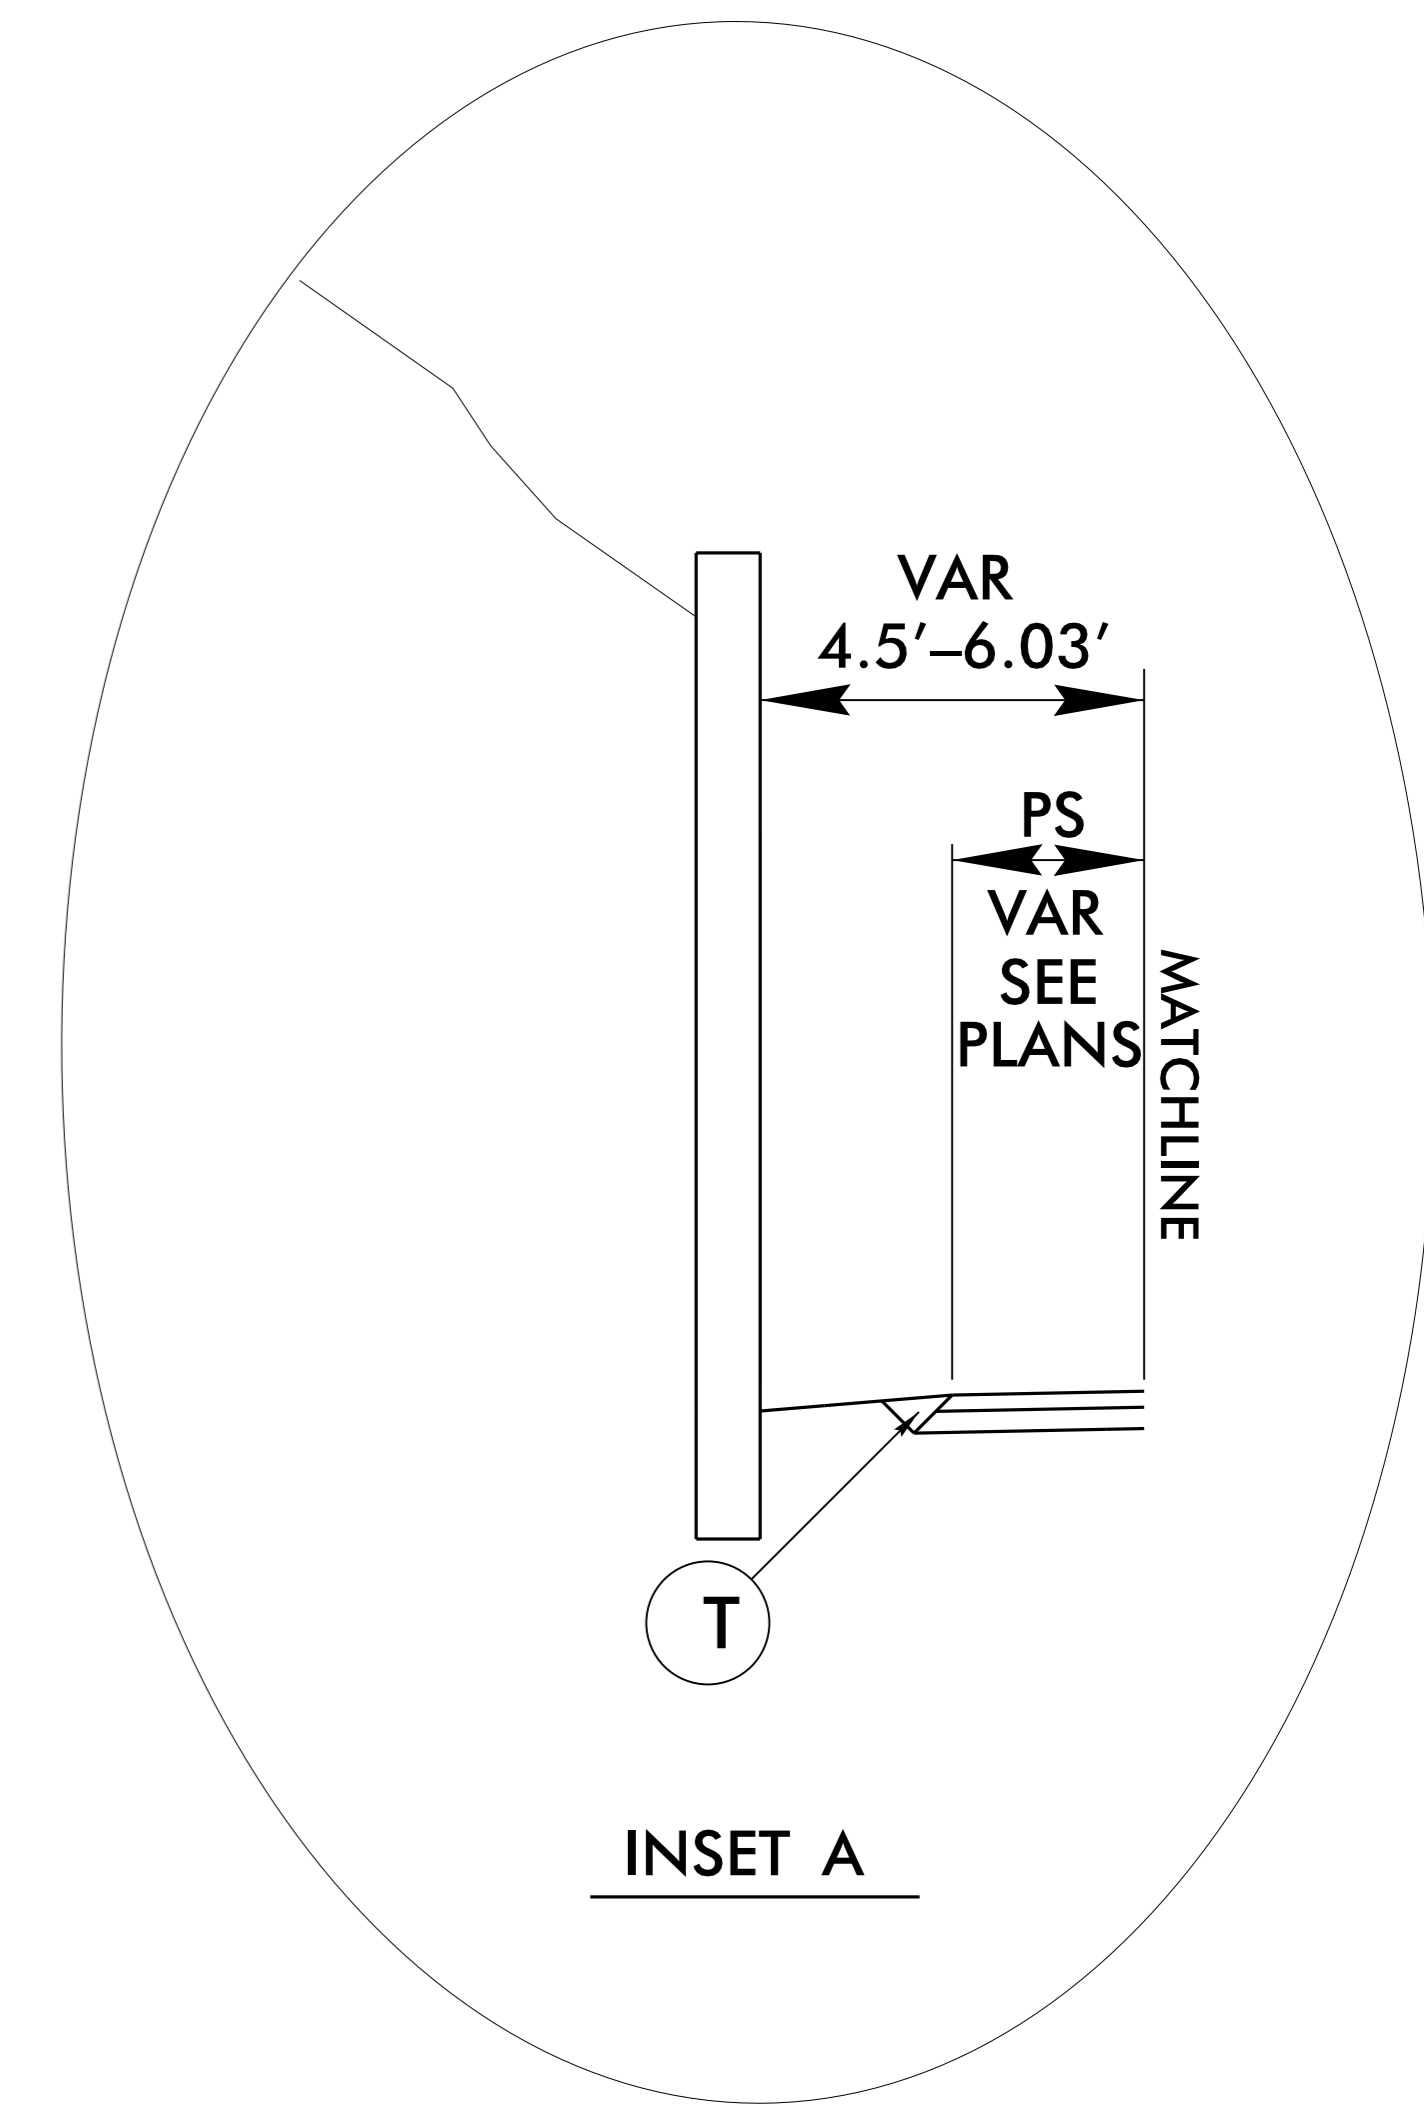

INSET A

USE INSET A -L- STA. 12+73.00-13+50.00

USE TYPICAL SECTION NO. 1

-L- STA 11+00.00 TO BEGIN BRIDGE STA 12+04.62
 -L- END BRIDGE STA 12+57.98 TO STA 13+50.00

| | |
|--|---|
| PROJECT REFERENCE NO. B-5380 | SHEET NO. 2A-1 |
| ROADWAY DESIGN ENGINEER SEAL 026964 C. Key | PAVEMENT DESIGN ENGINEER SEAL 022896 MORRISON |
| DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED | |

REVISIONS

19 JUL 2016 11:45 B5380.Rdy_tup.dgn