

5/14/99



NOTE:
UTILIZE SPECIAL STILLING BASIN(S) AS
STILLING BASIN WHERE APPLICABLE.

NOTE:
UTILIZE TURBIDITY CURTAIN AS NEEDED.

PROJECT REFERENCE NO. B-4945	SHEET NO. EC-4/CONST.4
R/W SHEET NO.	
ROADWAY DESIGN ENGINEER	HYDRAULICS ENGINEER



CLEARING AND GRUBBING
EROSION CONTROL FOR
CONSTRUCTION SHEET 4

BEGIN TIP PROJECT B-4945
-L- POC STA. 14+25.00

BEGIN BRIDGE
-L- STA. 16+40.38
BEGIN APPROACH SLAB
-L- STA. 16+29.51

END BRIDGE
-L- STA. 17+37.63
END APPROACH SLAB
-L- STA. 17+48.51

END TIP PROJECT B-4945
-L- POT STA. 19+00.00

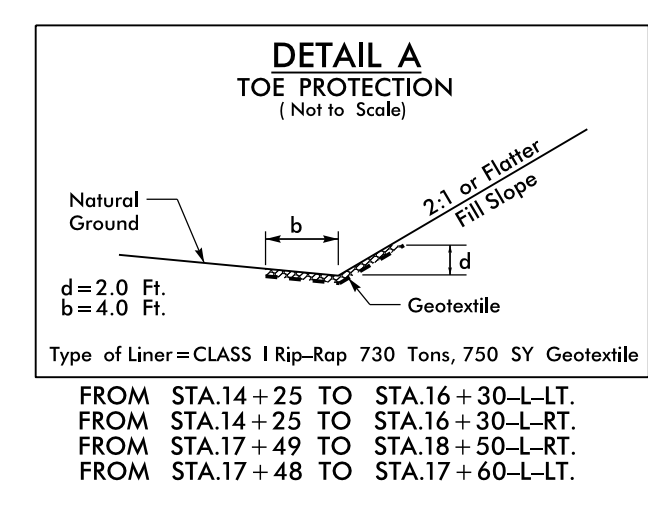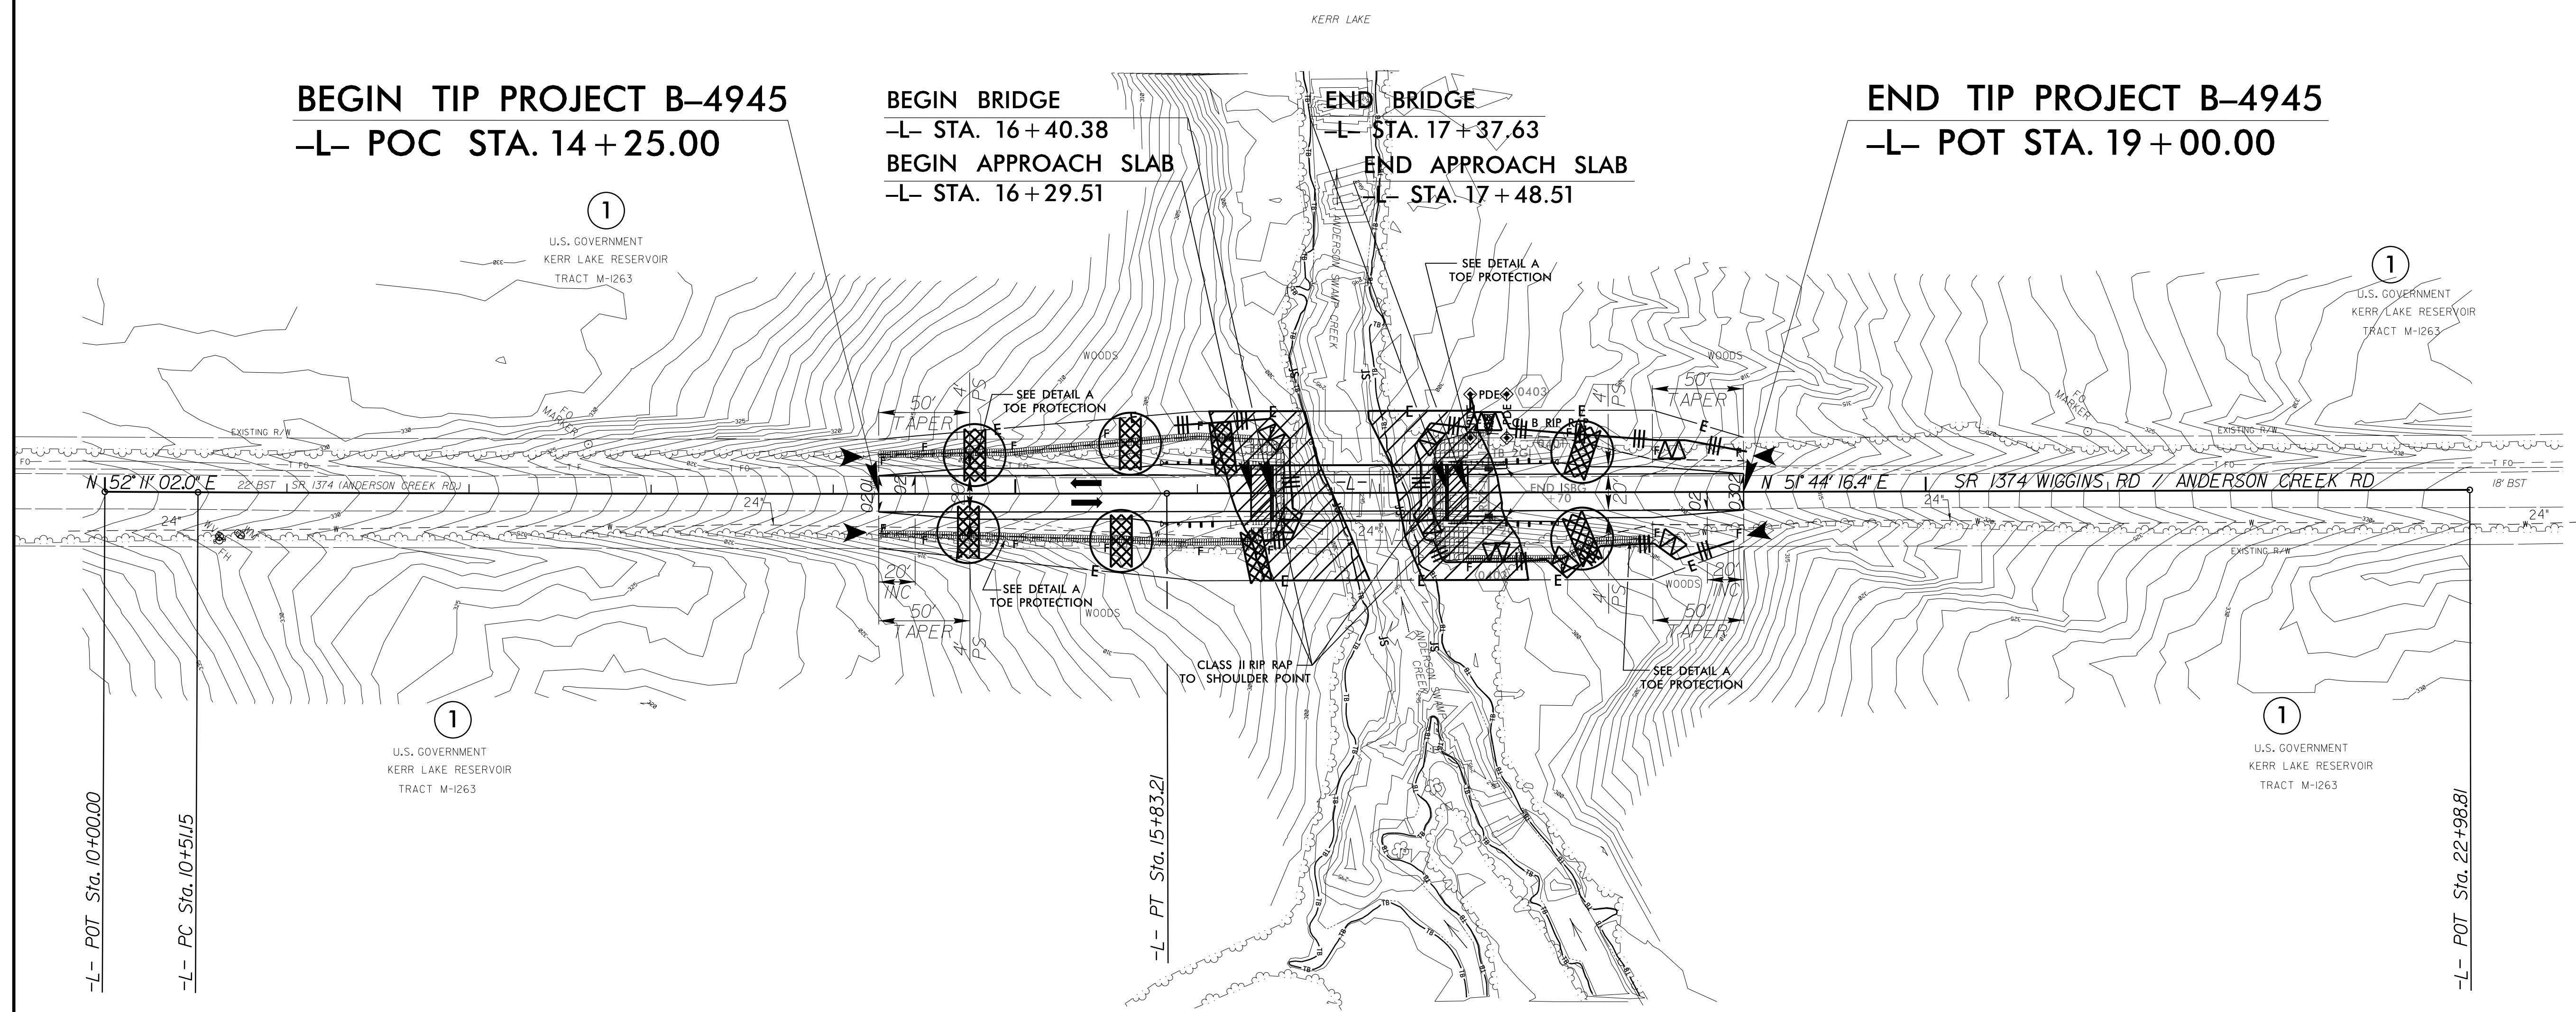

NOTE:
PLACE TEMPORARY ROCK SEDIMENT DAMS TYPE - B
AND TEMPORARY ROCK SILT CHECKS TYPE - A AT
DRAINAGE OUTLETS.

 ENVIRONMENTALLY SENSITIVE AREA
SEE PROJECT SPECIAL PROVISIONS

NOTE: IF THE WATER LEVEL IS ELEVATED DURING CONSTRUCTION,
THEN THE USE OF A ROCK EMBANKMENT WILL BE NECESSARY
TO 1' ABOVE THE WATER LEVEL.
SEE DETAIL SHEET 2G-1 FOR DETAIL.
IF THE ROCK EMBANKMENT IS NOT NECESSARY,
THEN THE TOE PROTECTION MUST BE USED.

09-AUG-2016 14:06
PR:ENYI:ommett:R:\Projects\B-4945-EC.psh_04.dgn
M:\jerry\ec\ec-4.dgn