

STATE	PROJECT NO.	SHEET NO.	TOTAL SHEETS
N.C.	2017CPT.IO.I6.I004I.I - ETC. 2017CPT.IO.I6.2004I.4 - ETC. 2017CPT.IO.I6.20042.8 - ETC.	9	

F.A. PROJECT NO.

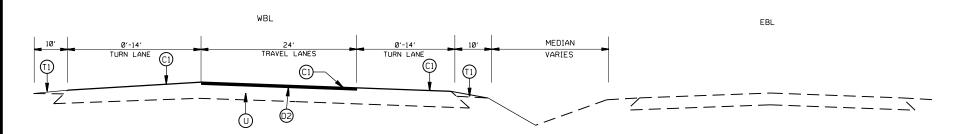

## TYPICAL SECTION NO. 4

US 74 WB (MAP 3) TURNLANES

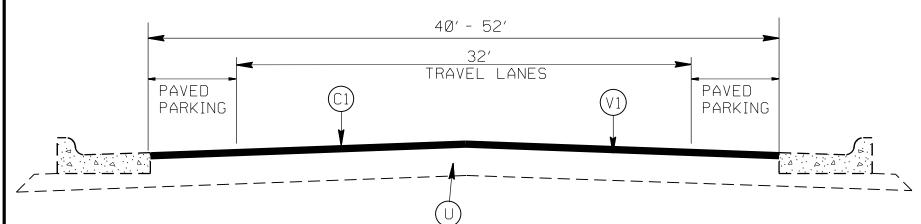

TYPICAL SECTION NO. 5

NC 218 (MAP 4)
FROM PVMT JT TO INTERSECTION WITH SR 1418
\* SEE NOTE 1

## PAVEMENT SCHEDULE

- PROP. APPROX. 2.0" ASPHALT CONC. SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 224 LBS. PER SO. YD.
- PROP. APPROX. 1.5" ASPHALT CONC. SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD.
- PROP. APPROX. 1.0" ASPHALT CONC. SURFACE COURSE, TYPE SF9.5A, AT AN AVERAGE RATE OF 110 LBS. PER SQ. YD.
- $|ig( { t C4} ig)|$  prop.asphalt surface treatment, type 78m, double seal.
- PROPOSED 2.5" ASPHALT CONC. INTERMEDIATE CORSE, TYPE 119.0B, AT AN AVERAGE RATE OF 285 LBS. PER SQ. YD.
- (D2) AST MAT COAT # 67
- (T1) | SHOULDER RECONSTRUCTION
- (V1) | MILLING OF EXISTING PAVEMENT, 2.0" IN DEPTH.
- $( extsf{V2})$  | milling of existing pavement, 3.5" in depth.
- V3 PROFILE MILLING EXISTING ASPHALT, Ø 2"
- (U) EXISTING PAVEMENT
- (Z) | FULL DEPTH RECLAMATION

2017-2018 ANSON COUNTY RESURFACING



REVISIONS