



PAVEMENT SCHEDULE

C1	PROP. APPROX. 1.5" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD.
C2	PROP. APPROX. 0.75" OPEN GRADE ASPHALT FRICTION COURSE, TYPE FC-2 MODIFIED, AT AN AVERAGE RATE OF 90 LBS. PER SQ. YD.
V1	MILLING BITUMINOUS PAVEMENT. 1.5" IN DEPTH.
U	EXISTING PAVEMENT.

NOTES:

- \*ALL RAMPS TO BE MILLED AND RESURFACED TO THE ENDS OF THE RADII, OR AS DIRECTED BY THE ENGINEER
- \*ALL ACCESS/EXIT RAMPS, EDGES, PAVEMENT WIDENING, INTERSECTIONS, AND BRIDGE FLARES ARE INCLUDED IN THE SUMMARY OF QUANTITIES
- \*EXISTING PAVED SHOULDERS NOT TO BE MILLED
- \*1.5" MILLING AND 1.5" OF S9.5C TO BE APPLIED IN TRAVEL LANES ONLY
- \*OPEN GRADE ASPHALT FRICTION COURSE TO BE APPLIED ± 26' WIDE OR ONE FOOT BEYOND TRAVEL LANES ON EACH SIDE OF TRAVELWAY
- \*EXISTING MILLED RUMBLE STRIPS NOT TO BE DISTURBED
- \*RAMPS DO NOT RECEIVE (OGAFC) APPLICATION. ADDITIONAL QUANTITIES ARE FOR EXTRA LANE WIDTHS ON THE MAIN LINE.

REVISED: 1/11/17 SPF

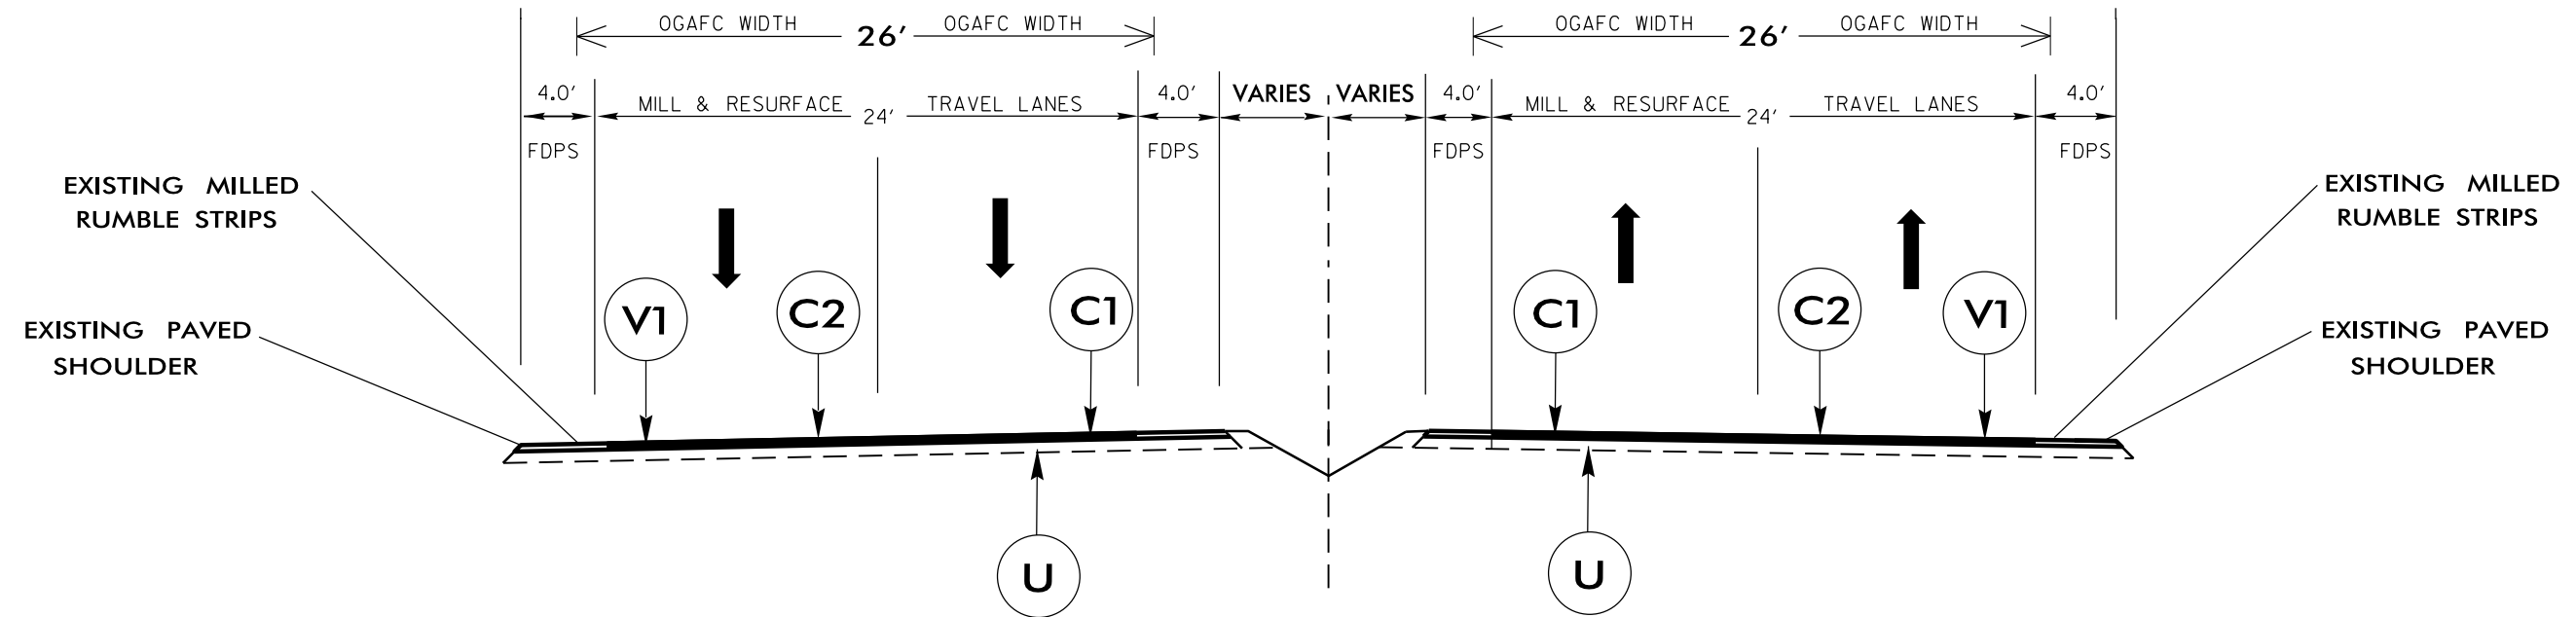

**TYPICAL SECTION NO. 1**

USE WITH MAPS 1-2, 4-5

NTS