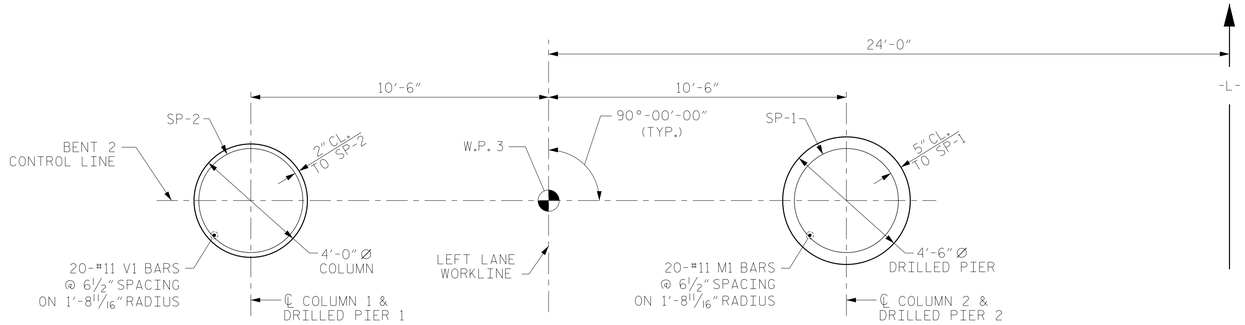

TYP. COLUMN REINFORCEMENT

TYP. DRILLED PIER REINFORCEMENT

PLAN OF DRILLED PIERS & COLUMNS

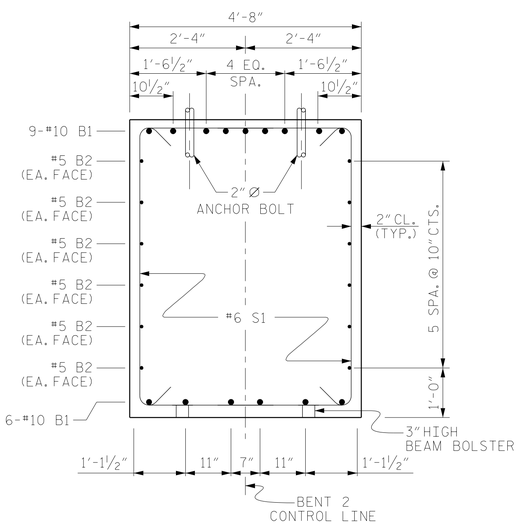

SECTION A-A

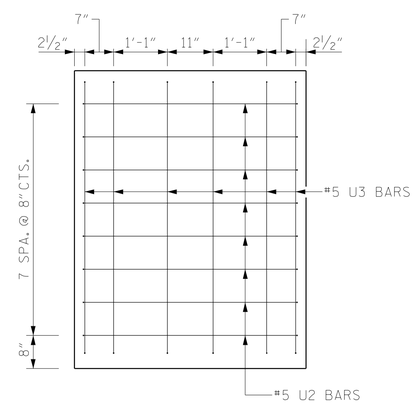

VIEW B-B

(OPPOSITE SIDE SIMILAR)

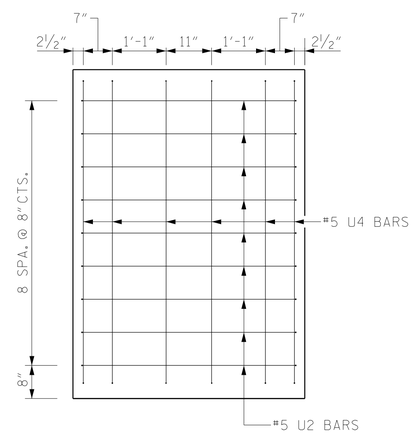

VIEW D-D

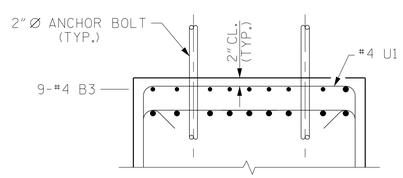

SECTION C-C

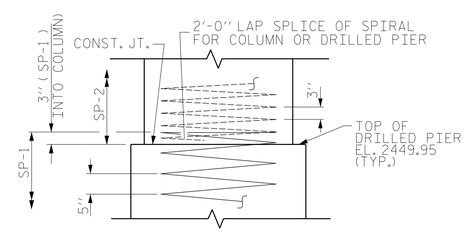

CONSTRUCTION JOINT DETAIL

BAR TYPES

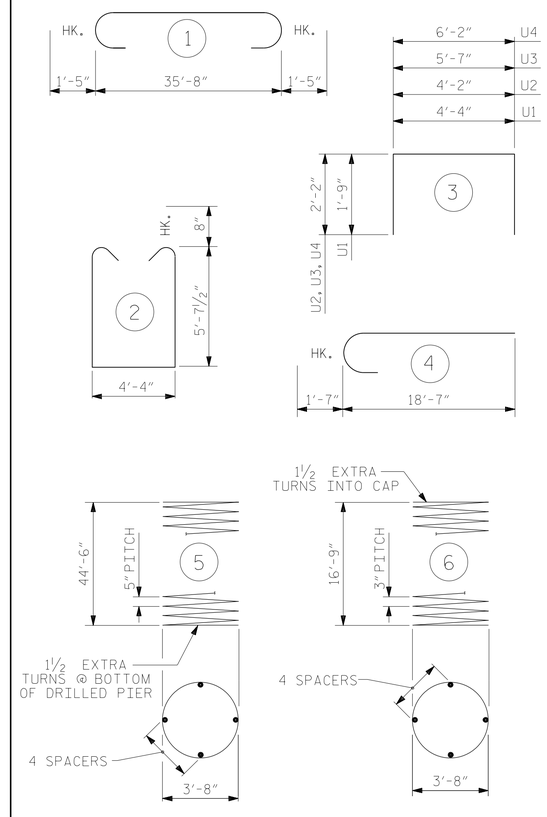

ALL BAR DIMENSIONS ARE OUT TO OUT.

BILL OF MATERIAL

BENT 2

BAR	NO.	SIZE	TYPE	LENGTH	WEIGHT
B1	15	#10	1	38'-6"	2485
B2	12	#5	STR	35'-8"	446
B3	9	#4	STR	4'-8"	28
B4	9	#4	STR	9'-2"	55
M1	40	#11	STR	57'-3"	12167
S1	102	#6	2	16'-11"	2592
U1	49	#4	3	7'-10"	256
U2	17	#5	3	8'-6"	151
U3	6	#5	3	9'-11"	62
U4	6	#5	3	10'-6"	66
V1	40	#11	4	20'-2"	4286
REINFORCING STEEL				LBS.	22594
SP-1	2	*	5	1230'-8"	2567
SP-2	2	**	6	780'-4"	1043
SPIRAL COLUMN REINFORCING STEEL				LBS.	3610

CLASS A CONCRETE BREAKDOWN

POUR #2 - COLUMNS	C.Y.	15.4
POUR #3 - CAP	C.Y.	39.0
TOTAL CLASS A CONCRETE	C.Y.	54.4

DRILLED PIERS

DRILLED PIER CONCRETE POUR #1 (DRILLED PIERS)	C.Y.	53.0
4'-6" DIA. DRILLED PIER NOT IN SOIL	LIN.FT.	37.0
4'-6" DIA. DRILLED PIER IN SOIL	LIN.FT.	53.0
CSL TUBES	LIN.FT.	465.0
PERM. STEEL CASING FOR 4'-6" DIA. DRILLED PIER	LIN.FT.	34.9

* THE SP-1 SPIRAL REINFORCING STEEL SHALL BE W31 OR D-31 COLD DRAWN WIRE OR #5 PLAIN OR DEFORMED BAR.

** THE SP-2 SPIRAL REINFORCING STEEL SHALL BE W20 OR D-20 COLD DRAWN WIRE OR #4 PLAIN OR DEFORMED BAR.

PROJECT NO. R-2519B

YANCEY/MITCHELL COUNTY

STATION: 122+22.50 -L-

SHEET 2 OF 2

NORTH CAROLINA PROFESSIONAL SEAL 18442 ENGINEER RICHARD LEON BOLLINGER, JR.

Digitally signed by Richard L Bollinger
Date: 2014.08.26 15:48:07 -04'00'

RS&H IMPROVING YOUR WORLD

RS&H Architects-Engineers-Planners, Inc.
8601 Six Forks Road, Suite 260
Raleigh, NC 27615
919-846-6701 FAX 919-846-9080
www.rsandh.com
North Carolina License Nos. 50073 * F-0493 * C-28

STATE OF NORTH CAROLINA
DEPARTMENT OF TRANSPORTATION
RALEIGH

SUBSTRUCTURE

BENT 2 DETAILS & BILL OF MATERIAL

LEFT LANE

REVISIONS							SHEET NO.
NO.	BY:	DATE:	NO.	BY:	DATE:		S-86
1			3				TOTAL SHEETS
2			4				194

DWG. No. 032

DRAWN BY :	MKO	DATE :	07/2013
CHECKED BY :	JMR	DATE :	07/2013
DESIGN ENGINEER OF RECORD :	JMR	DATE :	07/2013