LOAD AND RESISTANCE FACTOR RATING (LRFR) SUMMARY FOR PRESTRESSED CONCRETE GIRDERS

LEVEL		VEHICLE	WEIGHT (W) (TONS)	CONTROLLING LOAD RATING (#)	MINIMUM RATING FACTORS (RF)	TONS = W × RF	STRENGTH I LIMIT STATE											SERVICE III LIMIT STATE						COMMENT NUMBER
							LIVE-LOAD FACTORS (γ_L)	MOMENT					SHEAR					LIVE-LOAD FACTORS (γ_L)	MOMENT					
								DISTRIBUTION FACTORS (DF)	RATING FACTOR	SPAN	GIRDER LOCATION	DISTANCE FROM LEFT END OF SPAN (ft)	DISTRIBUTION FACTORS (DF)	RATING FACTOR	SPAN	GIRDER LOCATION	DISTANCE FROM LEFT END OF SPAN (ft)		DISTRIBUTION FACTORS (DF)	RATING FACTOR	SPAN	GIRDER LOCATION	DISTANCE FROM LEFT END OF SPAN (ft)	
DESIGN LOAD RATING		HL-93 (INVENTORY)	N/A	1	1.09	--	1.75	0.90	1.29	2	ER	68.9	0.90	1.31	2	ER	41.0	0.80	0.90	1.09	2	ER	68.9	
		HL-93 (OPERATING)	N/A		1.68	--	1.35	0.90	1.68	2	ER	68.9	0.99	2.10	2	I	13.2	N/A	--	--	--	--	--	
		HS-20 (INVENTORY)	36.000	2	1.66	59.8	1.75	0.96	1.74	3	ER	36.1	0.99	2.21	1	I	78.2	0.80	0.90	1.66	2	ER	68.9	
		HS-20 (OPERATING)	36.000		2.26	81.4	1.35	0.96	2.26	3	ER	36.1	0.99	2.91	1	I	78.2	N/A	--	--	--	--	--	
LEGAL LOAD RATING	SINGLE VEHICLE (SV)	SNSH	13.500		4.08	55.1	1.40	0.96	4.97	3	ER	36.1	0.99	7.45	1	I	78.2	0.80	0.90	4.08	2	ER	68.9	
		SNGARBS2	20.000		2.89	57.8	1.40	0.96	3.68	3	ER	36.1	0.99	5.22	1	I	78.2	0.80	0.90	2.89	2	ER	68.9	
		SNAGRIS2	22.000		2.68	59.0	1.40	0.96	3.47	3	ER	36.1	0.99	4.82	1	I	78.2	0.80	0.90	2.68	2	ER	68.9	
		SNCOTTS3	27.250		2.03	55.3	1.40	0.96	2.46	3	ER	36.1	0.99	3.58	1	I	78.2	0.80	0.90	2.03	2	ER	68.9	
		SNAGGRS4	34.925		1.64	57.3	1.40	0.96	2.05	3	ER	36.1	0.99	2.79	1	I	78.2	0.80	0.90	1.64	2	ER	68.9	
		SNS5A	35.550		1.60	56.9	1.40	0.96	2.01	3	ER	36.1	0.99	2.81	1	I	78.2	0.80	0.90	1.60	2	ER	68.9	
		SNS6A	39.950		1.45	57.9	1.40	0.96	1.84	3	ER	36.1	0.99	2.54	1	I	78.2	0.80	0.90	1.45	2	ER	68.9	
		SNS7B	42.000		1.38	58.0	1.40	0.96	1.75	3	ER	36.1	0.99	2.44	1	I	78.2	0.80	0.90	1.38	2	ER	68.9	
	TRUCK TRACTOR SEMI-TRAILER (TTST)	TNAGRIT3	33.000		1.76	58.1	1.40	0.96	2.25	3	ER	36.1	0.99	3.02	1	I	78.2	0.80	0.90	1.76	2	ER	68.9	
		TNT4A	33.075		1.76	58.2	1.40	0.96	2.25	3	ER	36.1	0.99	3.09	2	I	13.2	0.80	0.90	1.76	2	ER	68.9	
		TNT6A	41.600		1.42	59.1	1.40	0.96	1.84	3	ER	36.1	0.99	2.58	2	I	13.2	0.80	0.90	1.42	2	ER	68.9	
		TNT7A	42.000		1.41	59.2	1.40	0.96	1.85	3	ER	36.1	0.99	2.56	1	I	78.2	0.80	0.90	1.41	2	ER	68.9	
		TNT7B	42.000		1.44	60.5	1.40	0.96	1.90	3	ER	36.1	0.99	2.42	1	I	78.2	0.80	0.90	1.44	2	ER	68.9	
		TNAGRIT4	43.000		1.39	59.8	1.40	0.96	1.82	3	ER	36.1	0.99	2.39	1	I	78.2	0.80	0.90	1.39	2	ER	68.9	
		TNAGT5A	45.000		1.32	59.4	1.40	0.96	1.71	3	ER	36.1	0.99	2.27	1	I	78.2	0.80	0.90	1.32	2	ER	68.9	
		TNAGT5B	45.000	3	1.31	59.0	1.40	0.96	1.70	3	ER	36.1	0.99	2.26	1	I	78.2	0.80	0.90	1.31	2	ER	68.9	

LOAD FACTORS:

DESIGN LOAD RATING FACTORS	LIMIT STATE	γ_{DC}	γ_{DW}
	STRENGTH I	1.25	1.50
	SERVICE III	1.00	1.00

NOTES:

MINIMUM RATING FACTORS ARE BASED ON THE STRENGTH I AND SERVICE III LIMIT STATES.

ALLOWABLE STRESSES FOR SERVICE III LIMIT STATE ARE AS REQUIRED FOR DESIGN.

COMMENTS:

1.
2.
3.
4.

(#) CONTROLLING LOAD RATING

(1) DESIGN LOAD RATING (HL-93)

(2) DESIGN LOAD RATING (HS-20)

(3) LEGAL LOAD RATING **

** SEE CHART FOR VEHICLE TYPE

GIRDER LOCATION

I - INTERIOR GIRDER
EL - EXTERIOR LEFT GIRDER
ER - EXTERIOR RIGHT GIRDER

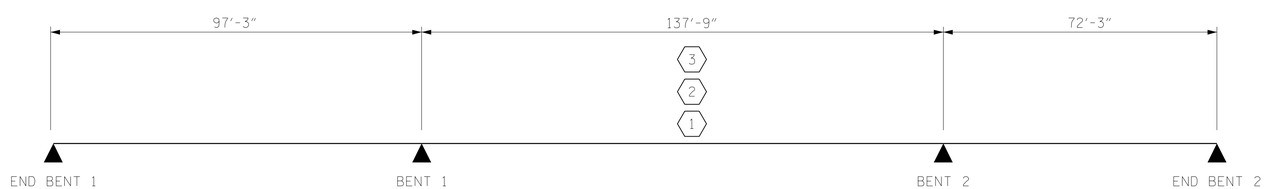

LRFR SUMMARY

PROJECT NO. R-2519B
YANCEY/MITCHELL COUNTY
STATION: 122+22.50 -L-

NORTH CAROLINA PROFESSIONAL SEAL 18442 ENGINEER RICHARD LEON BOLLINGER JR.

Digitally signed by Richard L Bollinger
Date: 2014.08.26 14:50:36 -04'00'

RS&H IMPROVING YOUR WORLD

RS&H Architects-Engineers-Planners, Inc.
8601 Six Forks Road, Suite 260
Raleigh, NC 27615
919-846-6701 FAX 919-846-9080
www.rsandh.com
North Carolina License Nos. 50073 * F-0493 * C-28

STATE OF NORTH CAROLINA
DEPARTMENT OF TRANSPORTATION
RALEIGH

STANDARD
LRFR SUMMARY FOR PRESTRESSED CONCRETE GIRDERS
(NON-INTERSTATE TRAFFIC)

REVISIONS						
NO.	BY:	DATE:	NO.	BY:	DATE:	
1			3			
2			4			

SHEET NO. S-58
TOTAL SHEETS 194

DRAWN BY : JML DATE : 04/2013
CHECKED BY : JMR DATE : 04/2013
DESIGN ENGINEER OF RECORD : JMR DATE : 04/2013

DWG. No. 004