
## PROJECT REFERENCE NO. U-5742 Sig. 72.0

## PHASING DIAGRAM

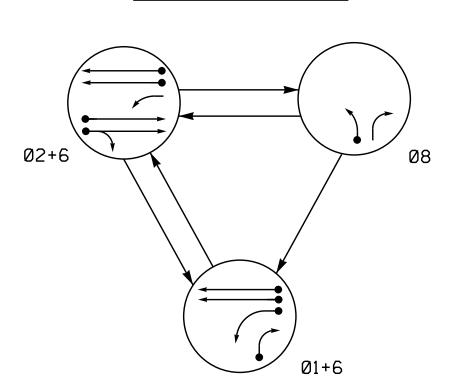


| TABLE OF OPERATION |          |              |    |                |  |  |  |
|--------------------|----------|--------------|----|----------------|--|--|--|
|                    | PHASE    |              |    |                |  |  |  |
| SIGNAL<br>FACE     | 01+6     | <b>∞</b> N+6 | ∞∞ | 止しなのエ          |  |  |  |
| 11                 | <b>←</b> | 수            | #  | <del>-</del> \ |  |  |  |
| 21,22              | R        | G            | R  | Υ              |  |  |  |
| 61,62              | G        | G            | R  | Y              |  |  |  |
| 81                 | R        | R            | G  | R              |  |  |  |
| 82                 | R/       | R            | G  | IJ             |  |  |  |


### ASC/3 DETECTOR INSTALLATION CHART **DETECTOR** PROGRAMMING EXTEND DELAY TIME TIME SIZE FROM TURNS (FT) STOPBAR (FT) 6X60 +5 | 2-4-2 6X60 +5 2-4-2 15 I Yes 2A 6XI6 60 4 2 Yes 6A,6B 6X6 90 4 6 Yes 8 Yes -8A | 6X60 | +5 | 2-4-2 | - |

## SIGNAL FACE I.D.

All Heads L.E.D.

# 12"





|             | DETECTED MOVEMENT             |  |  |  |
|-------------|-------------------------------|--|--|--|
| <del></del> | UNDETECTED MOVEMENT (OVERLAP) |  |  |  |
| <u></u>     | UNSIGNALIZED MOVEMENT         |  |  |  |

PHASING DIAGRAM DETECTION LEGEND

DETECTED MOVEMENT

<−−> PEDESTRIAN MOVEMENT


|     |     | SR 1404 (Morganton Road) | 35 MPH -3% Grade                                      |  |
|-----|-----|--------------------------|---|--|
| _   |     |                          | →62<br>→61 — []6B<br>— []6A                           |  |
|     |     | 2A                       | 21————————————————————————————————————                |  |
|     |     | 35 MPH +2% Grade         | SR 1404 (Morganton Road)                              |  |
| RT  |     |                          |   |  |
|     |     |                          |   |  |
| 6   | 8   |                          | Drive   |  |
| 12  | 5   |                          |   |  |
| -   | -   |                          |   |  |
| -   | -   |                          | May 1 Hay   |  |
| 4.0 | 2.0 |                          | $\begin{array}{c ccccccccccccccccccccccccccccccccccc$ |  |

# 3 Phase Fully Actuated Fayetteville Signal System

# NOTES

- Refer to "Roadway Standard Drawings NCDOT" dated January 2012 and "Standard Specifications for Roads and Structures" dated January 2012.
- 2. Do not program signal for late night flashing operation unless otherwise directed by the Engineer.
- 3. Phase 1 may be lagged.
- 4. Set all detector units to presence mode.
- 5. In the event of loop replacement, refer to the current ITS and Signals Design Manual and submit a Plan of Record to the Signal Design Section.
- 6. Locate new cabinet so as not to obstruct sight distance of vehicles turning right on red.
- 7. Pavement markings are existing.
- 8. Maximum times shown in timing chart are for free-run operation only. Coordinated signal system timing values supersede these values.

## LEGEND **PROPOSED** <u>EXISTING</u> Traffic Signal Head Modified Signal Head Sign Pedestrian Signal Head With Push Button & Sign Signal Pole with Guy Signal Pole with Sidewalk Guy Inductive Loop Detector Controller & Cabinet Junction Box 2-in Underground Conduit Right of Way Directional Arrow

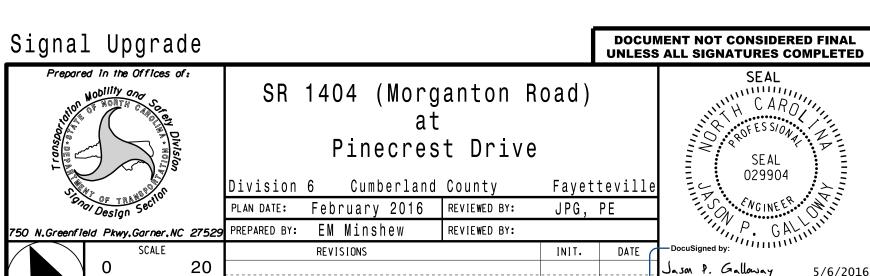

phases 2 and 6 lower than what is shown. Min Green for all other phases should not be lower than 4 seconds.

ASC/3 TIMING CHART

15

3.0

1.6

**FEATURE** 

Min Green \*

Walk \*

Ped Clear

Red Clear

Max Initial \*

Veh. Extension \*

Actuations B4 Add \*

Seconds /Actuation \*

Time Before Reduction

Time To Reduce \*

Minimum Gap

Locking Detector

Simultaneous Gap

Recall Position

Dual Entry

PHASE

VEH. RECALL VEH. RECAL

45

4.1

1.1

20

3.0

2.3

\_

-

-

\_

-

12

4.0

45

4.1

SIG. INVENTORY NO.

1"=20'