


PHASING DIAGRAM

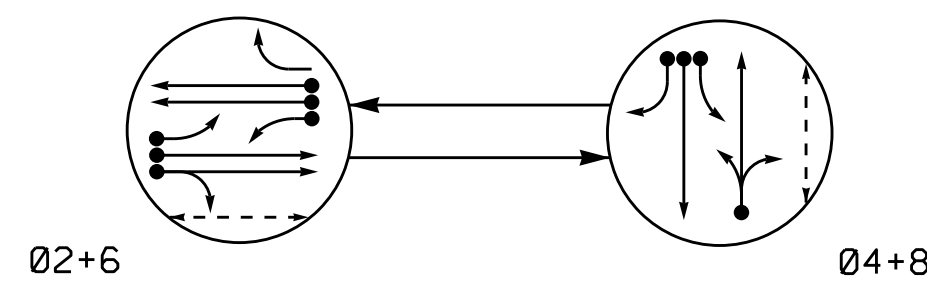

PHASING DIAGRAM DETECTION LEGEND



- DETECTED MOVEMENT
- ← UNDETECTED MOVEMENT (OVERLAP)
- UNSIGNALIZED MOVEMENT
- ⚡ PEDESTRIAN MOVEMENT

TABLE OF OPERATION

SIGNAL FACE	PHASE		
	02+6	04+8	F L
21	Y	R	Y
22,23	G	R	Y
41,42,43	R	G	R
61	Y	R	Y
62,63	G	R	Y
81,82	R	G	R
P21,P22	W	DW	DRK
P81,P82	DW	W	DRK

SIGNAL FACE I.D.

All Heads L.E.D.

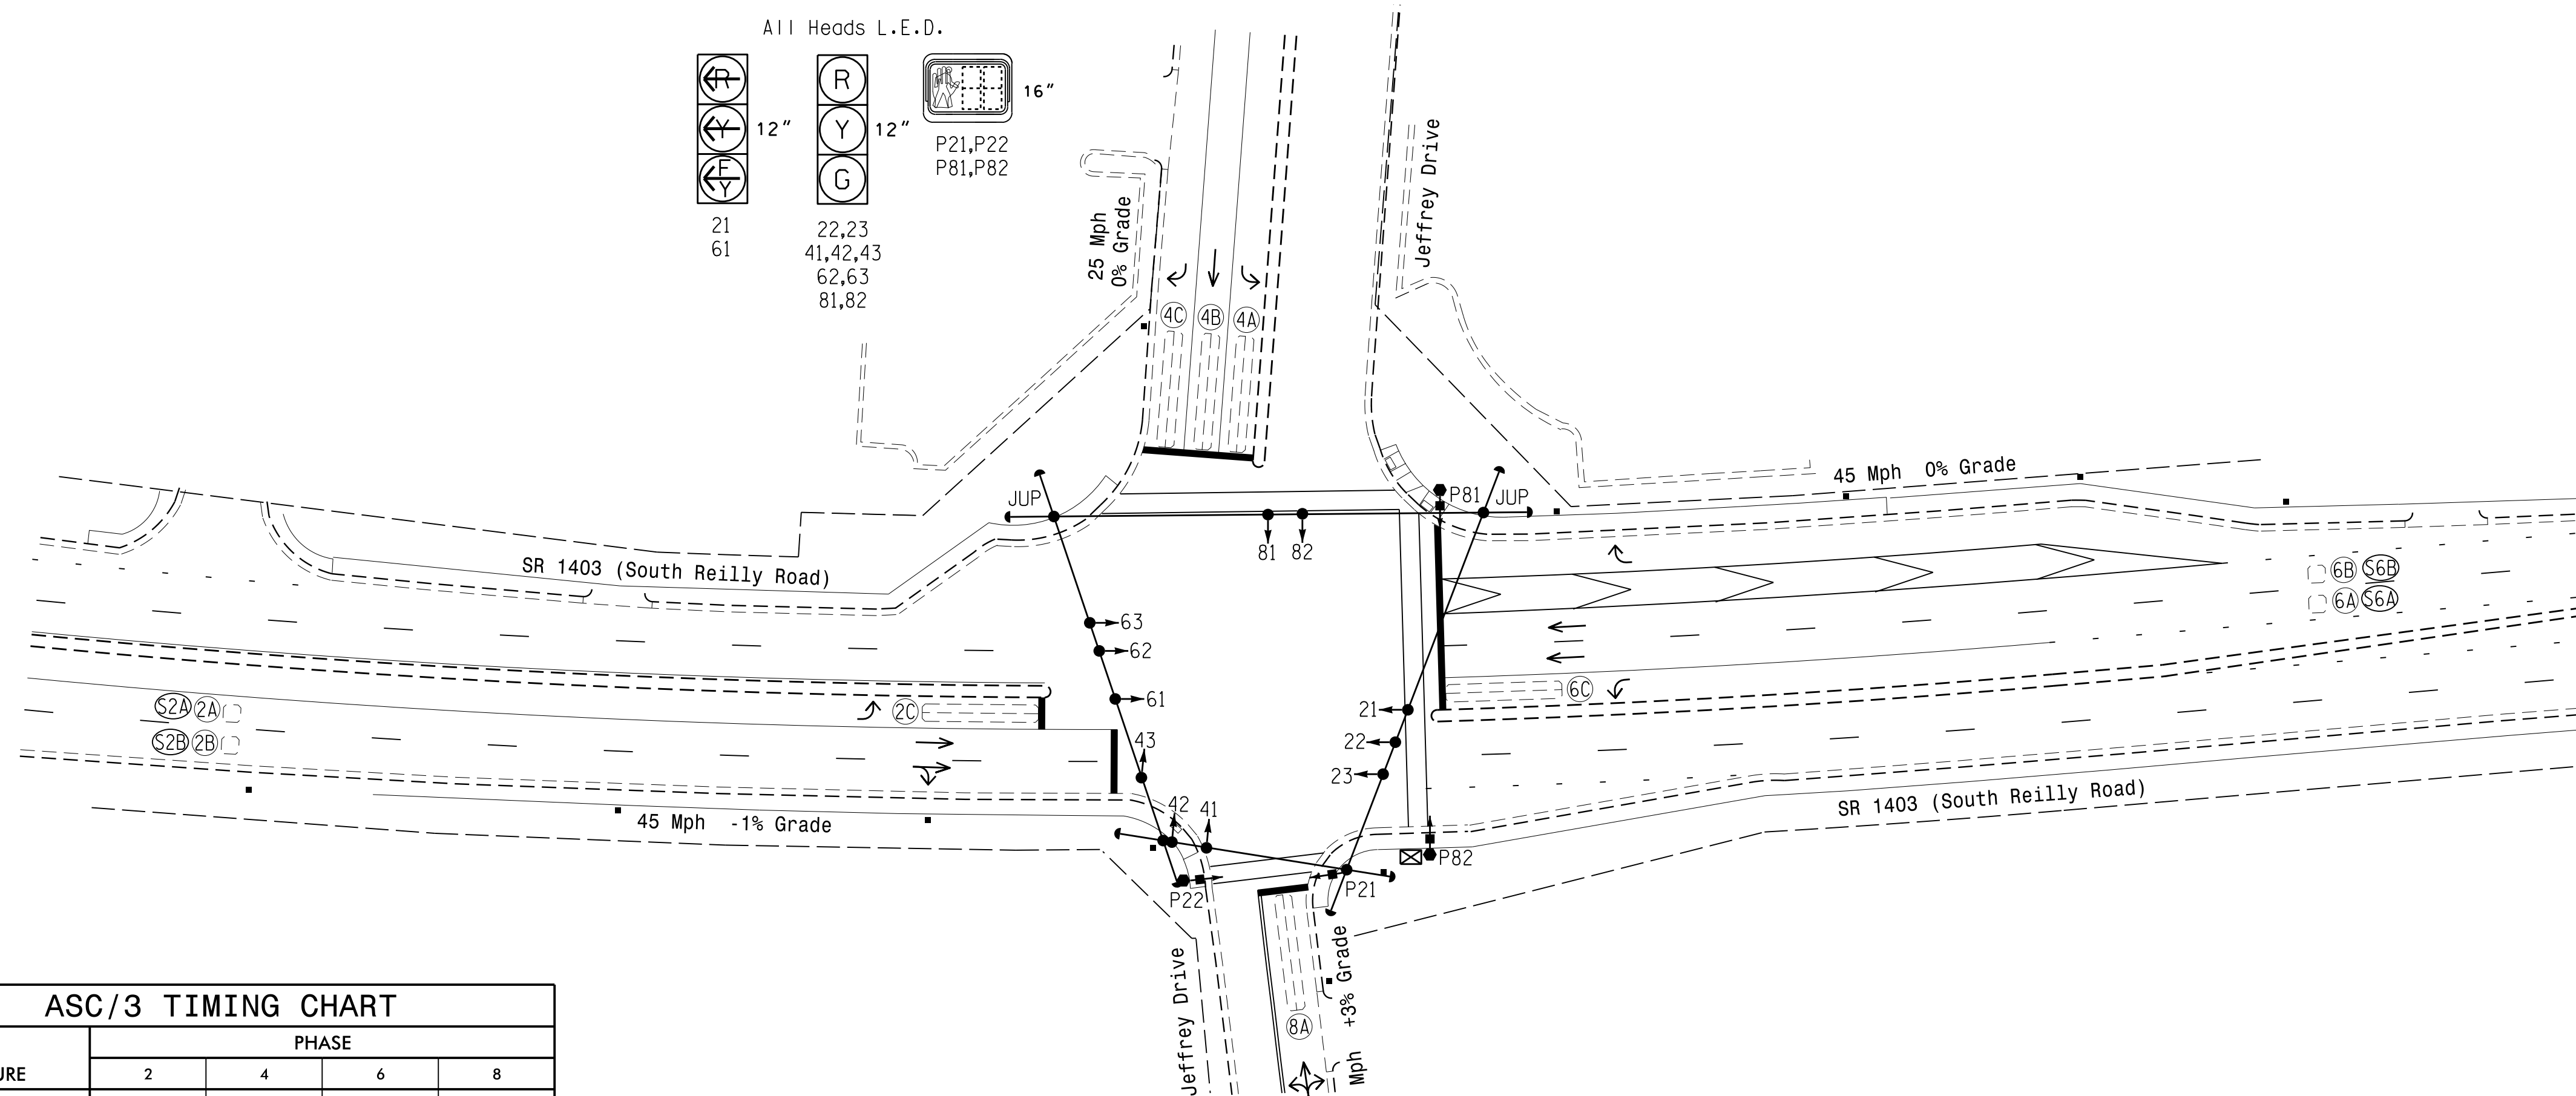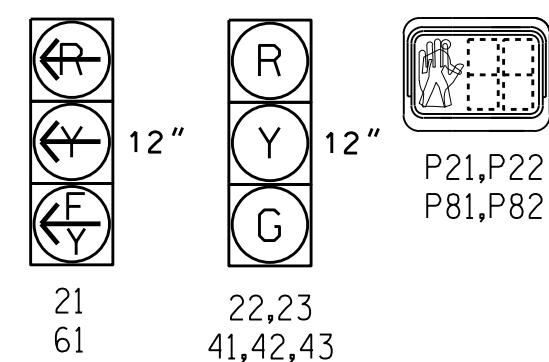

ASC/3 DETECTOR INSTALLATION CHART											
LOOP	SIZE (FT)	DISTANCE FROM STOPBAR (FT)	TURNS	NEW LOOP	PROGRAMMING						
					PHASE	CALLING	EXTEND TIME	DELAY TIME	TYPE	SYSTEM LOOP	NEW CARD
2A/S2A	6X6	300	5	-	2	Yes	-	-	N	X	X
2B/S2B	6X6	300	5	-	2	Yes	-	-	N	X	X
2C	6X40	0	2-4-2	-	2	Yes	-	3	G	-	X
4A	6X40	0	2-4-2	-	4	Yes	-	-	S	-	X
4B	6X40	0	2-4-2	-	4	Yes	-	-	S	-	X
4C	6X40	0	2-4-2	-	4	Yes	-	15	S	-	X
6A/S6A	6X6	300	5	-	6	Yes	-	-	N	X	X
6B/S6B	6X6	300	5	-	6	Yes	-	-	N	X	X
6C	6X40	0	2-4-2	-	6	Yes	-	3	G	-	X
8A	6X40	0	2-4-2	-	8	Yes	-	10	S	-	X

2 Phase Fully Actuated Fayetteville Signal System

NOTES

- Refer to "Roadway Standard Drawings NCDOT" dated January 2012 and "Standard Specifications for Roads and Structures" dated January 2012.
- Do not program signal for late night flashing operation unless otherwise directed by the Engineer.
- Set all detector units to presence mode.
- Locate new cabinet so as not to obstruct sight distance of vehicles turning right on red.
- Omit "WALK" and flashing "DON'T WALK" with no pedestrian calls.
- Program pedestrian heads to countdown the flashing "Don't Walk" time only.
- Pavement markings are existing.
- Maximum times shown in timing chart are for free-run operation only. Coordinated signal system timing values supersede these values.

ASC/3 TIMING CHART				
FEATURE	PHASE			
	2	4	6	8
Min Green *	12	7	12	7
Walk *	7	0	0	7
Ped Clear	7	0	0	29
Veh. Extension *	6.0	2.0	6.0	2.0
Max I *	80	20	80	20
Yellow	4.6	3.2	4.6	3.1
Red Clear	1.8	3.5	1.8	3.4
Actuations B4 Add *	0	-	0	-
Seconds / Actuation *	1.5	-	1.5	-
Max Initial *	34	-	34	-
Time Before Reduction *	15	-	15	-
Time To Reduce *	30	-	30	-
Minimum Gap	3.0	-	3.0	-
Locking Detector	X	-	X	-
Recall Position	VEH. RECALL	-	VEH. RECALL	-
Dual Entry	-	X	-	X
Simultaneous Gap	X	X	X	X

* These values may be field adjusted. Do not adjust Min Green and Extension times for phases 2 and 6 lower than what is shown. Min Green for all other phases should not be lower than 4 seconds.

LEGEND

- | PROPOSED | EXISTING |
|--|---------------------------------|
| ○ → Traffic Signal Head | ● → N/A |
| ● → Modified Signal Head | — Sign |
| ⊥ Pedestrian Signal Head With Push Button & Sign | ⊥ Signal Pole with Guy |
| ⊥ Signal Pole with Guy | ⊥ Signal Pole with Sidewalk Guy |
| ⊥ Inductive Loop Detector | ⊥ Controller & Cabinet |
| ⊥ Junction Box | ⊥ Junction Box |
| ⊥ 2-in Underground Conduit | ⊥ Right of Way |
| → Directional Arrow | → Directional Arrow |
| ○ Type II Signal Pedestal | ● Type II Signal Pedestal |

Signal Upgrade

750 N. Greenfield Pkwy, Garner, NC 27529

SR 1403 (South Reilly Road) at Jeffrey Drive

Division 6 Cumberland County Fayetteville

PLAN DATE: March 2016 REVIEWED BY: JPG

PREPARED BY: Jeff Spence REVIEWED BY:

SEAL

NORTH CAROLINA PROFESSIONAL ENGINEER

SEAL 029904

JASON P. GALLOWAY

DocuSigned by: Jason P. Galloway 5/6/2016

SIG. INVENTORY NO. 06-1339

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

06-MAY-2016 11:58 S:\MIS\5742\SIG\15_Signal\06\Signal_Design_Section\06\Eastern_Regional\U-5742_Fayetteville\06\U-5742_Sig.dgn U-5742_Sig.dgn_2016mmd.dgn JPD/lloway