


| | | |
|--------------------|------------------|---------------------|
| PROJECT NO. | SHEET NO. | TOTAL SHEETS |
| I-5892 | 3 | |

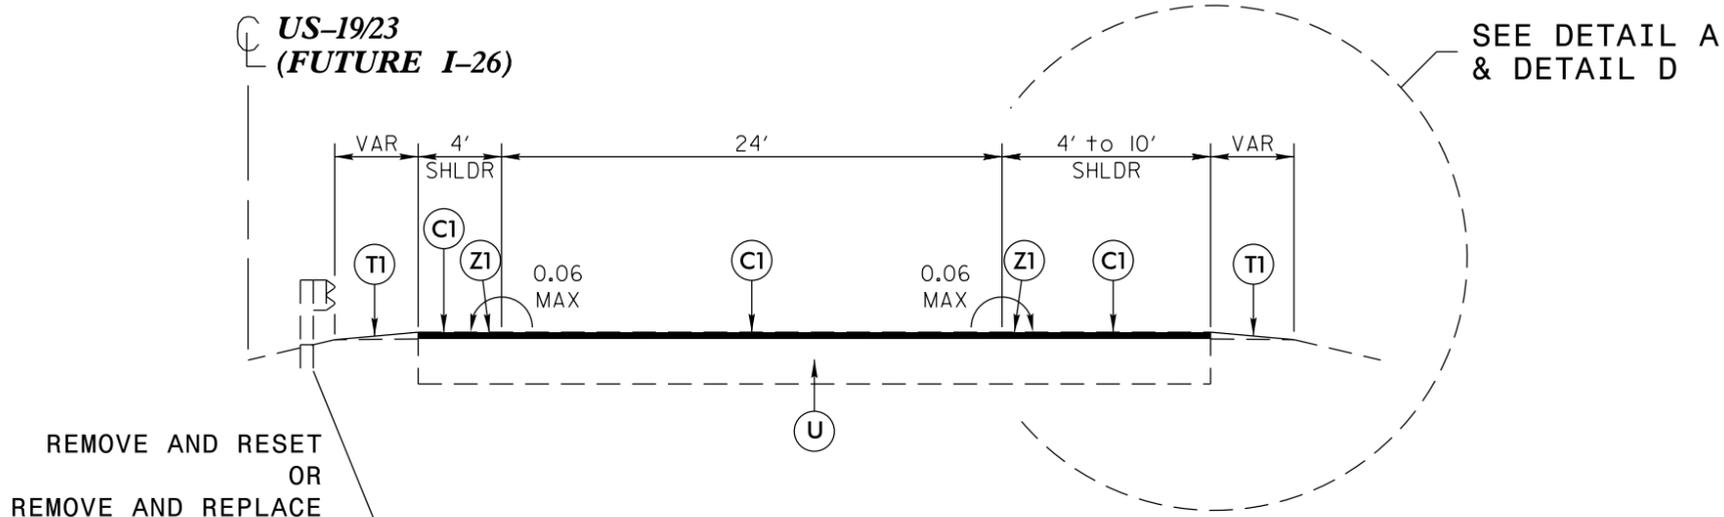

TYPICAL SECTION NO. 1


**CLIP/CUT/FILL SHOULDERS PER NCDOT STANDARD
DRAWING 560.01 & 560.02
BEFORE RE-INSTALLING GUARDRAIL
IN AREAS AS DIRECTED BY THE ENGINEER**

*EFF. 01-17-2012
REV. 02-29-2016*

2012 ROADWAY ENGLISH STANDARD DRAWINGS

The following Roadway Standards as appear in "Roadway Standard Drawings" Highway Design Branch - N.C. Department of Transportation - Raleigh, N.C., Dated January, 2012 are applicable to this project and by reference hereby are considered a part of these plans:

| STD. NO. | TITLE |
|---------------------------------|---|
| DIVISION 8 - INCIDENTALS | |
| 846.01 | Concrete Curb, Gutter and Curb & Gutter |
| 850.01 | Concrete Paved Ditches |
| 862.01 | Guardrail Placement |
| 862.02 | Guardrail Installation |
| 862.03 | Structure Anchor Units |
| 862.04 | Anchoring End of Guardrail - B-77 and B-83 Anchor Units |

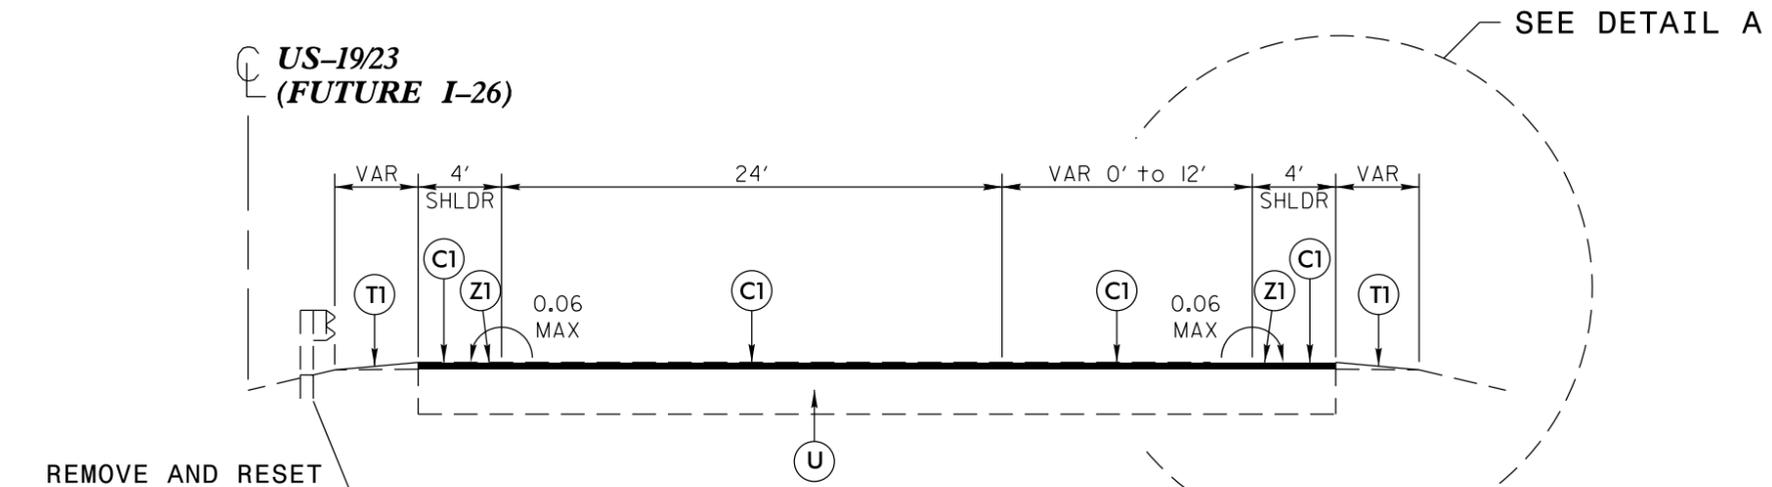

TYPICAL SECTION NO. 2

**CLIP/CUT/FILL SHOULDERS PER NCDOT STANDARD
DRAWING 560.01 & 560.02
BEFORE RE-INSTALLING GUARDRAIL
IN AREAS AS DIRECTED BY THE ENGINEER**

| PAVEMENT SCHEDULE | |
|-------------------|--|
| C1 | PROP. APPROX. 1-1/2" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD. |
| D1 | PROP. APPROX. 3" ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.0C, AT AN AVERAGE RATE OF 342 LBS. PER SQ. YD. |
| T1 | SHOULDER RECONSTRUCTION |
| U | EXISTING PAVEMENT |
| V1 | MILLING ASPHALT PAVEMENT, 1-1/2" DEPTH |
| V2 | MILLING ASPHALT PAVEMENT, 0" TO 1-1/2" DEPTH |
| V3 | MILLING ASPHALT PAVEMENT, 0" TO 5" DEPTH |
| V4 | INCIDENTIAL MILLING |
| Z1 | MILLED RUMBLE STRIPS (ASPHALT CONCRETE) |

BUNCOMBE COUNTY