



**TYPICAL SECTION NO. 8**  
 MAP 11 SR 4315 WAUGHTOWN ST.  
 MAP 12 SR 1686 SHATTALON ROAD  
 MAP 13 SR 1393 SHATTALON ROAD  
 MAP 17 SR 1001 SHALLOWFORD RD.  
 MAP 23 SR 2004 MAIN ST.  
 MAP 25 SR 4205 SOUTH MAIN ST.

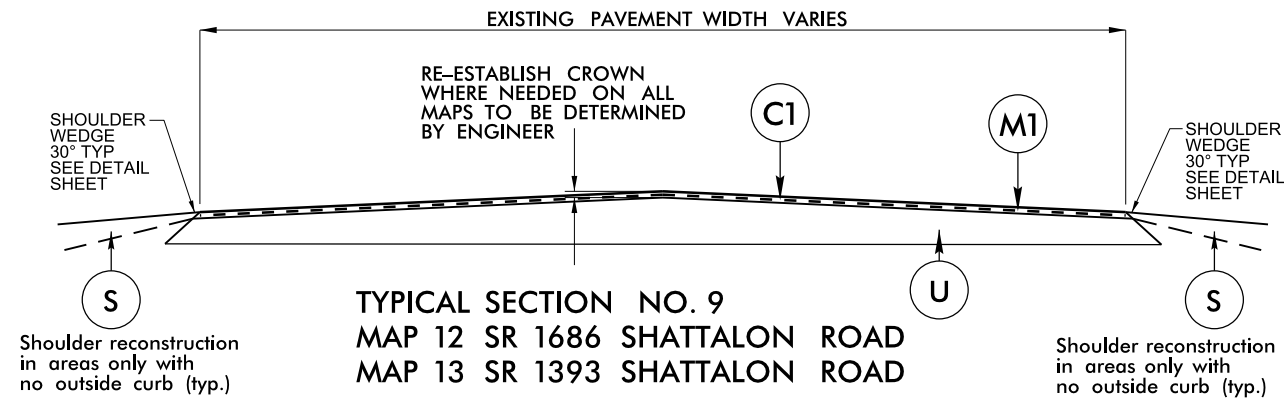

**TYPICAL SECTION NO. 9**  
 MAP 12 SR 1686 SHATTALON ROAD  
 MAP 13 SR 1393 SHATTALON ROAD

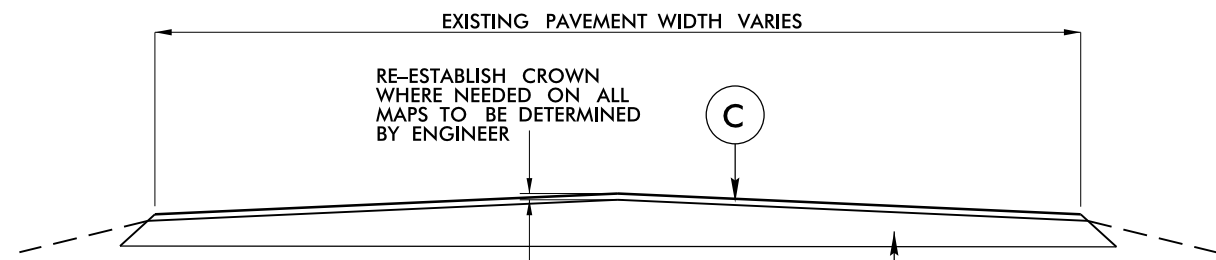

**TYPICAL SECTION NO. 10**  
 MAP 14 SR 3855 STONEHAVEN RD.  
 MAP 15 SR 3843 WHITE HORN DR.

PAVEMENT SCHEDULE	
C	PROP. APPROX. 1 1/2" ASPHALT CONCRETE SURFACE COURSE, TYPE SF9.5A, TO BE APPLIED AT AN AVERAGE RATE OF 165 LBS PER SQ. YD.
C1	PROP. APPROX. 1 1/2" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, TO BE APPLIED AT AN AVERAGE RATE OF 168 LBS PER SQ. YD.
C2	PROP. APPROX. 1 1/2" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, TO BE APPLIED AT AN AVERAGE RATE OF 168 LBS PER SQ. YD.
E	PROP. APPROX. 4 1/2" ASPHALT CONCRETE BASE COURSE, TYPE B25.0B, TO BE APPLIED AT AN AVERAGE RATE OF 513 LBS PER SQ. YD.
F	AST, MAT & SINGLE SEAL
M	MILL ASPHALT PAVEMENT, 0" TO 1 1/2"
M1	MILL ASPHALT PAVEMENT, 1 1/2" DEPTH
M2	MILL ASPHALT PAVEMENT, 2" DEPTH
M3	MILL ASPHALT PAVEMENT, 6" DEPTH
M4	MILLED RUMBLE STRIP
M5	FINE MILLING
N	PROP. APPROX. 5/8" ULTRATHIN HOT MIX BONDED WEARING SURFACE COURSE, AT AN AVERAGE RATE OF 70 LBS. PER SQ. YD.
S	SHOULDER RECONSTRUCTION (SEE DETAIL)
U	EXISTING PAVEMENT