
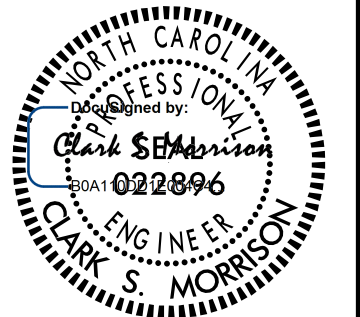

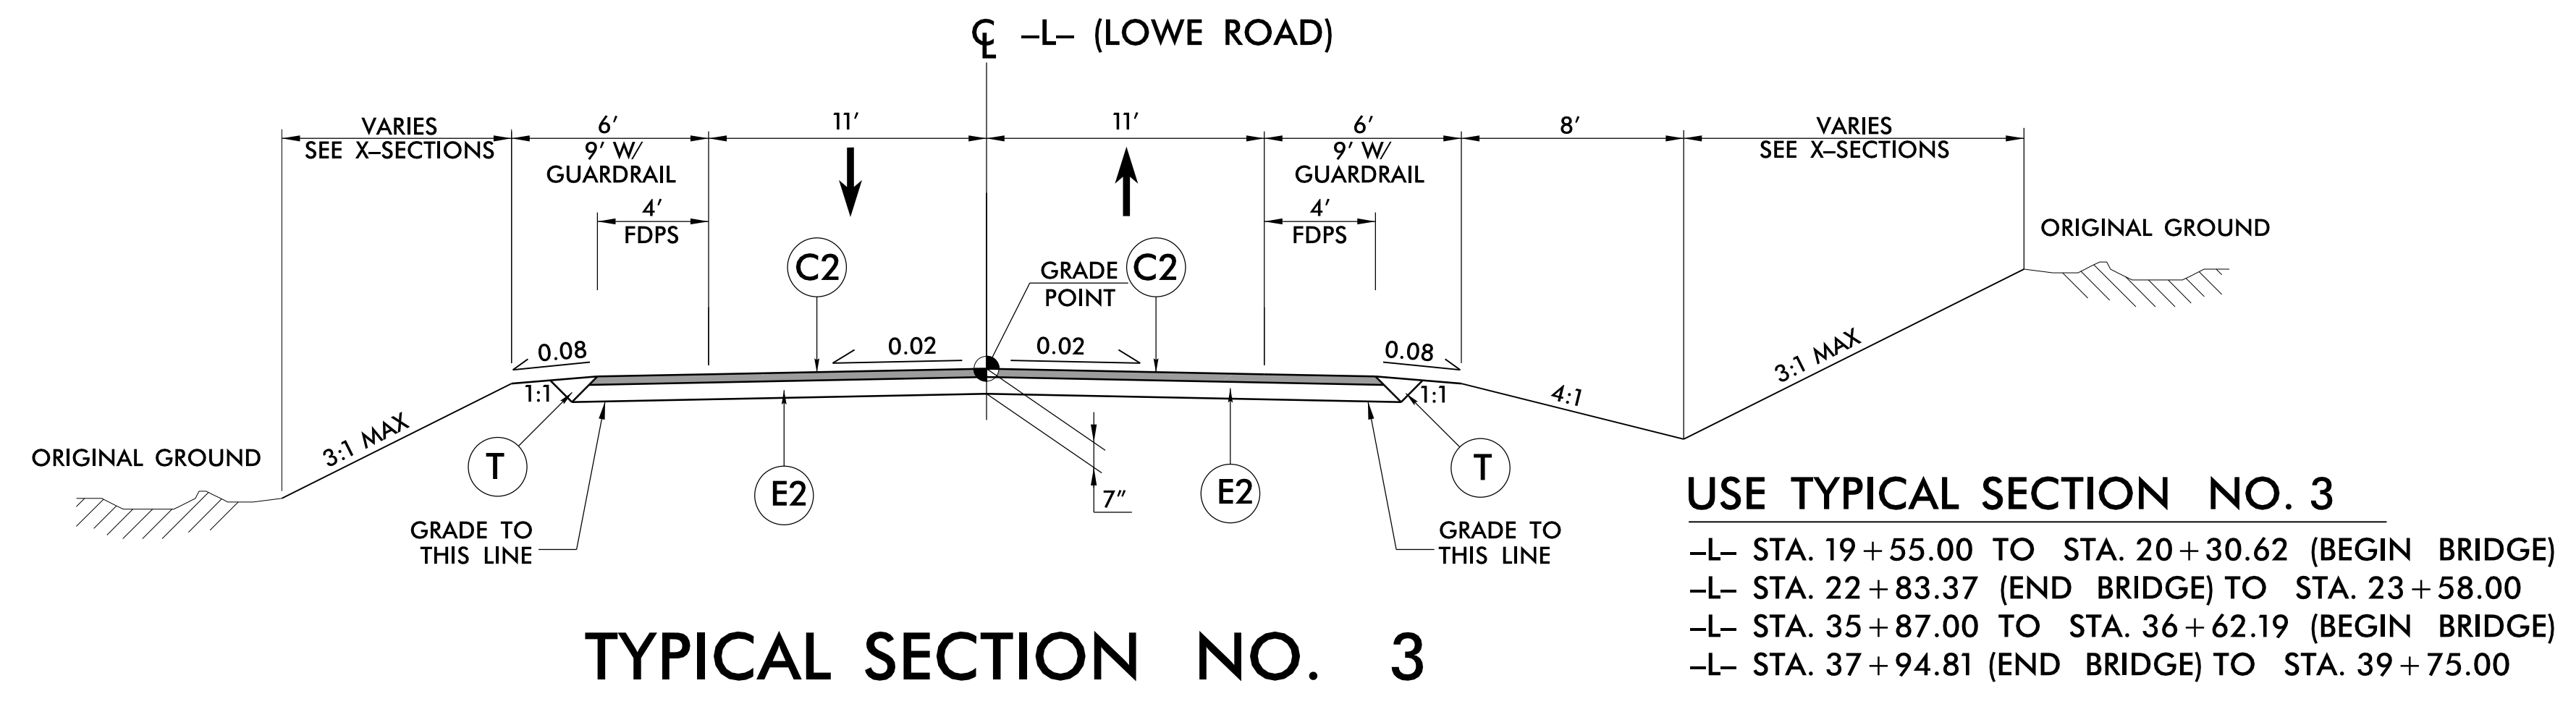
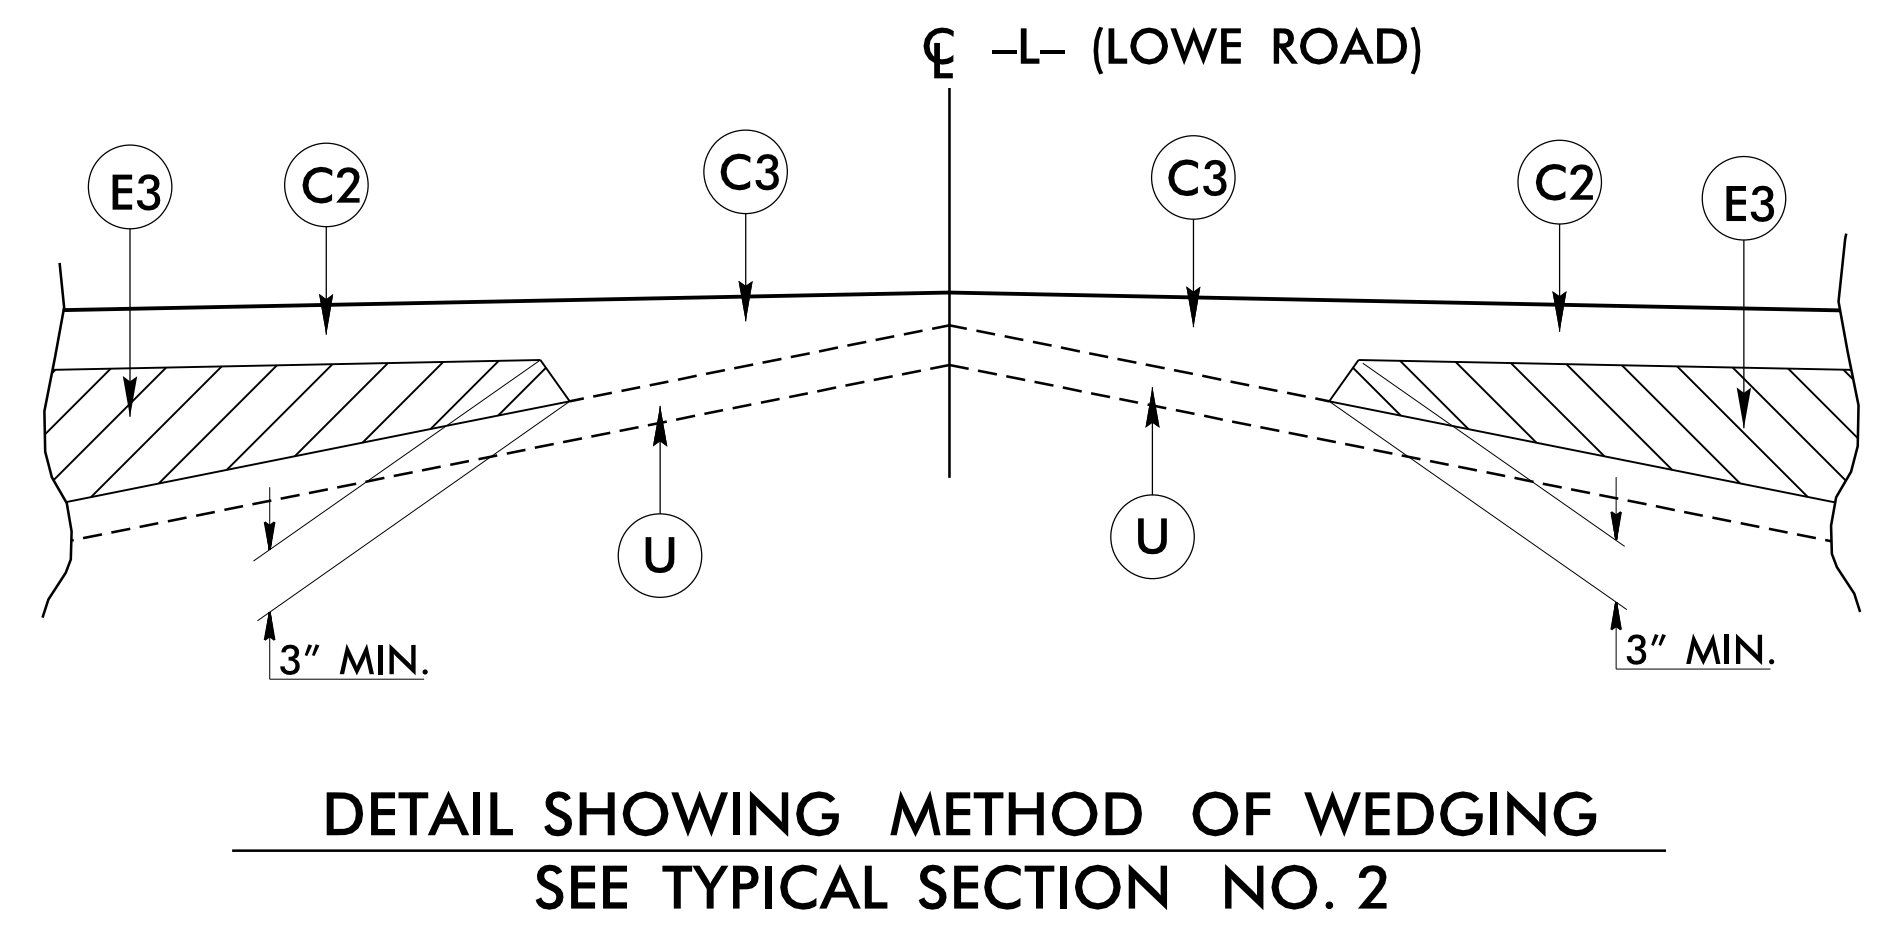
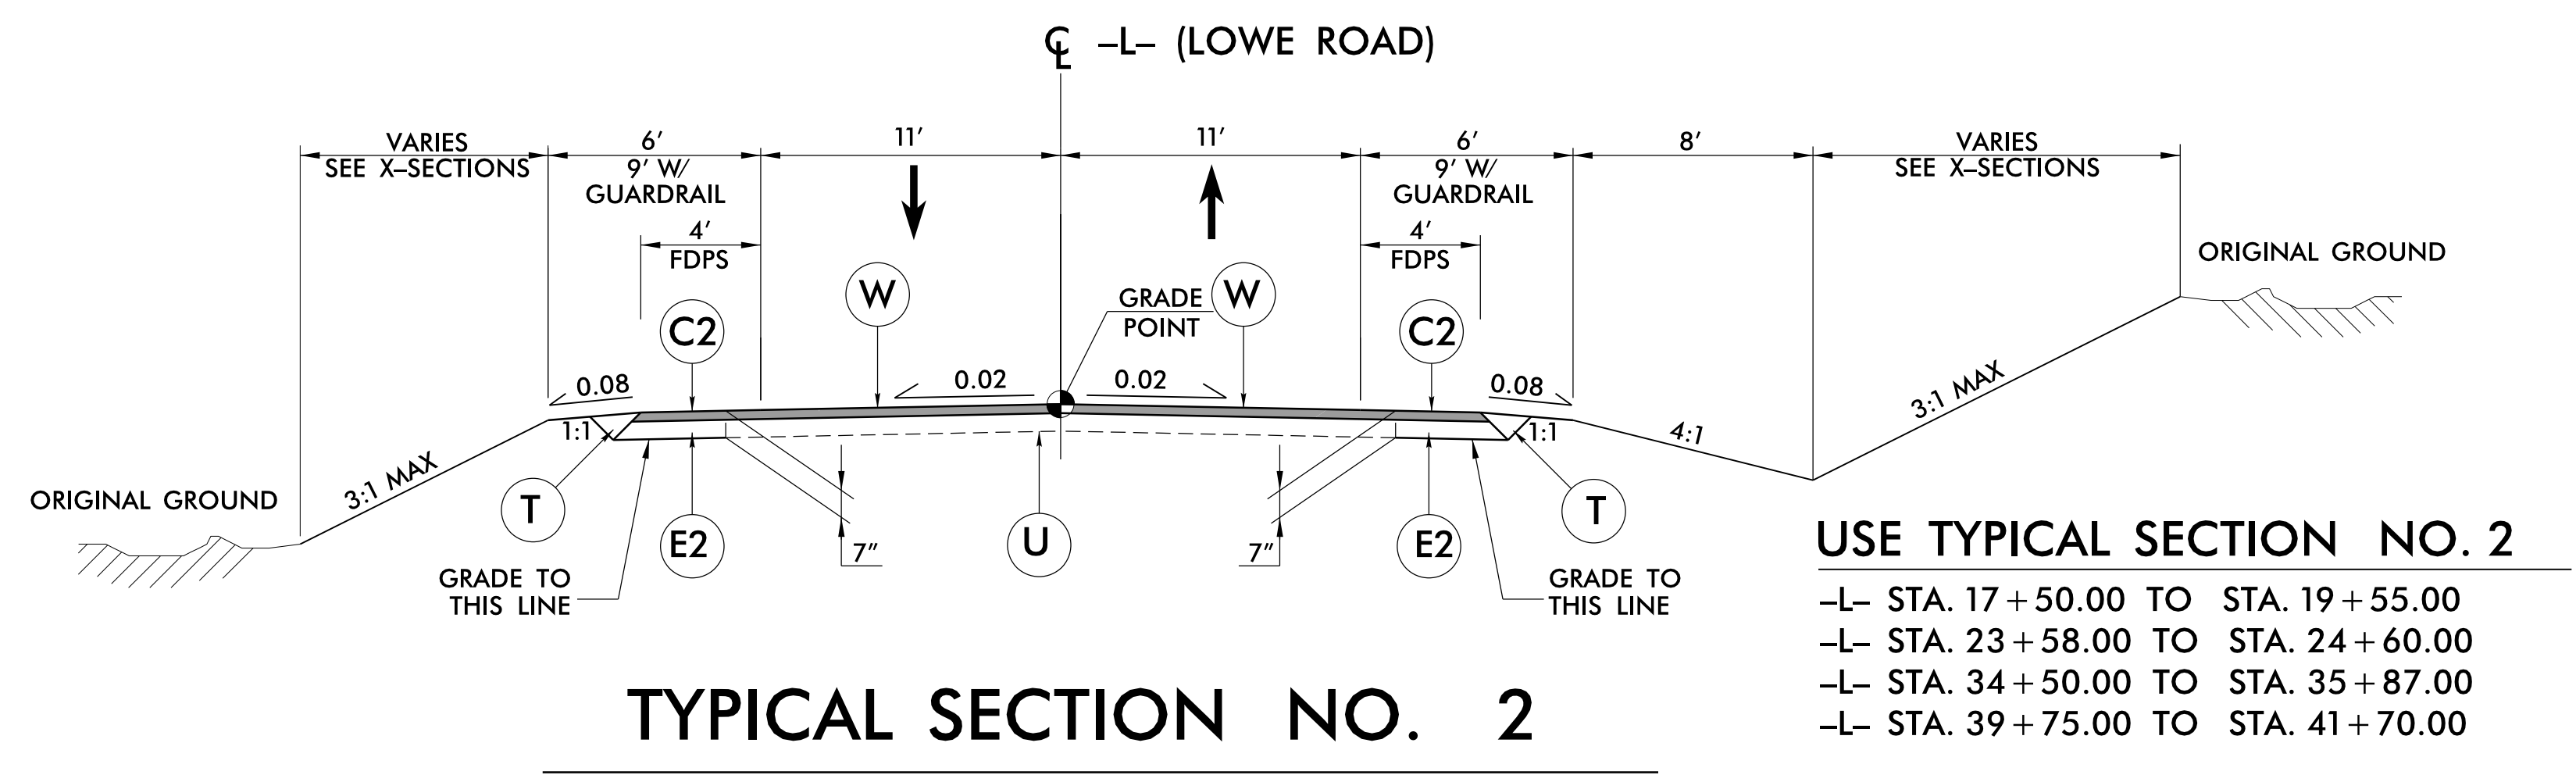
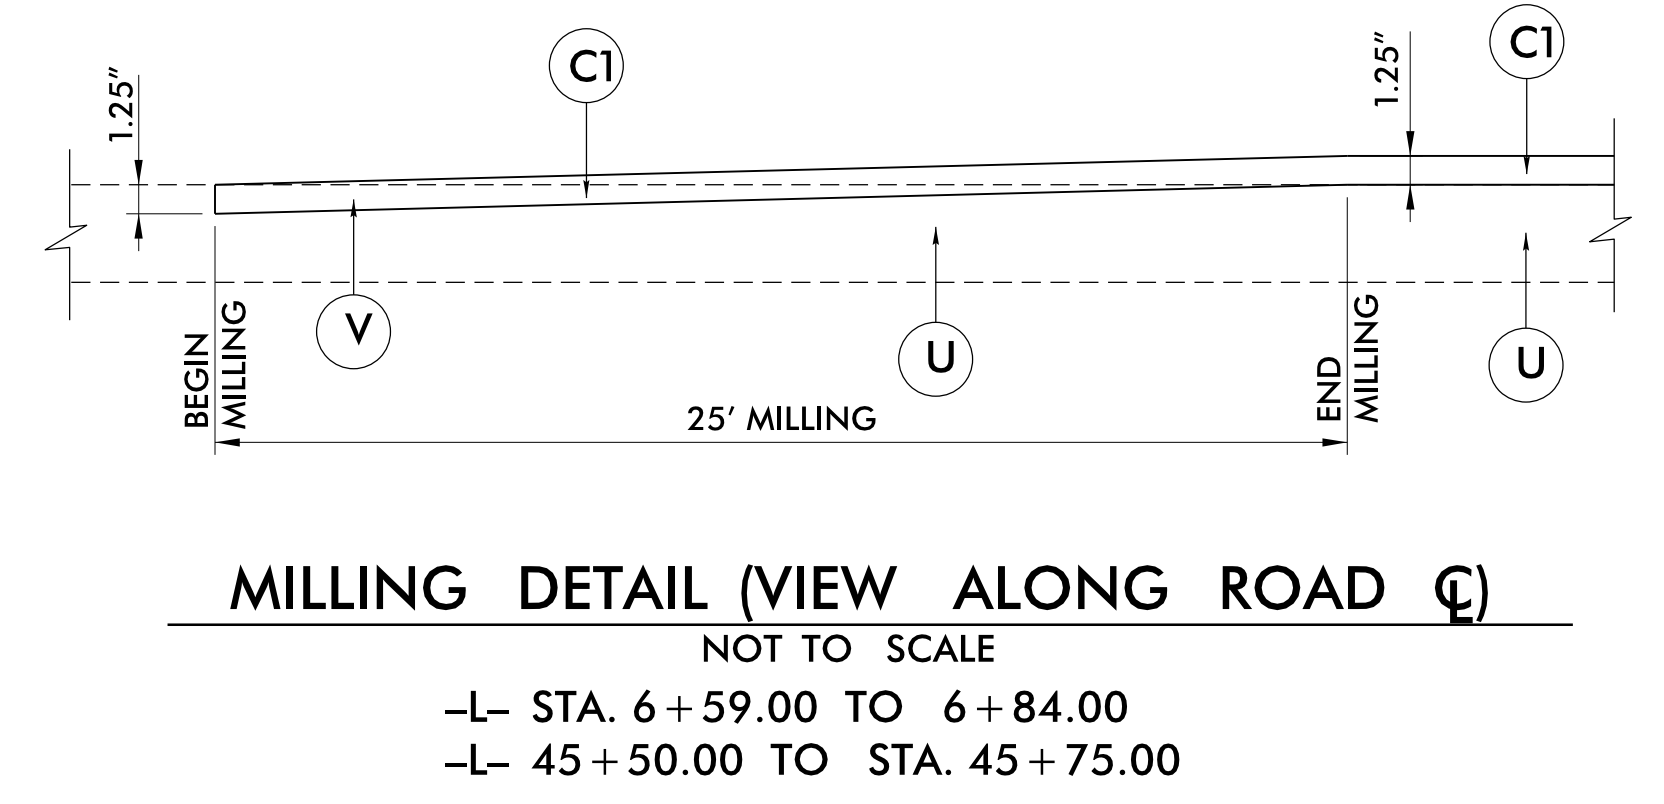
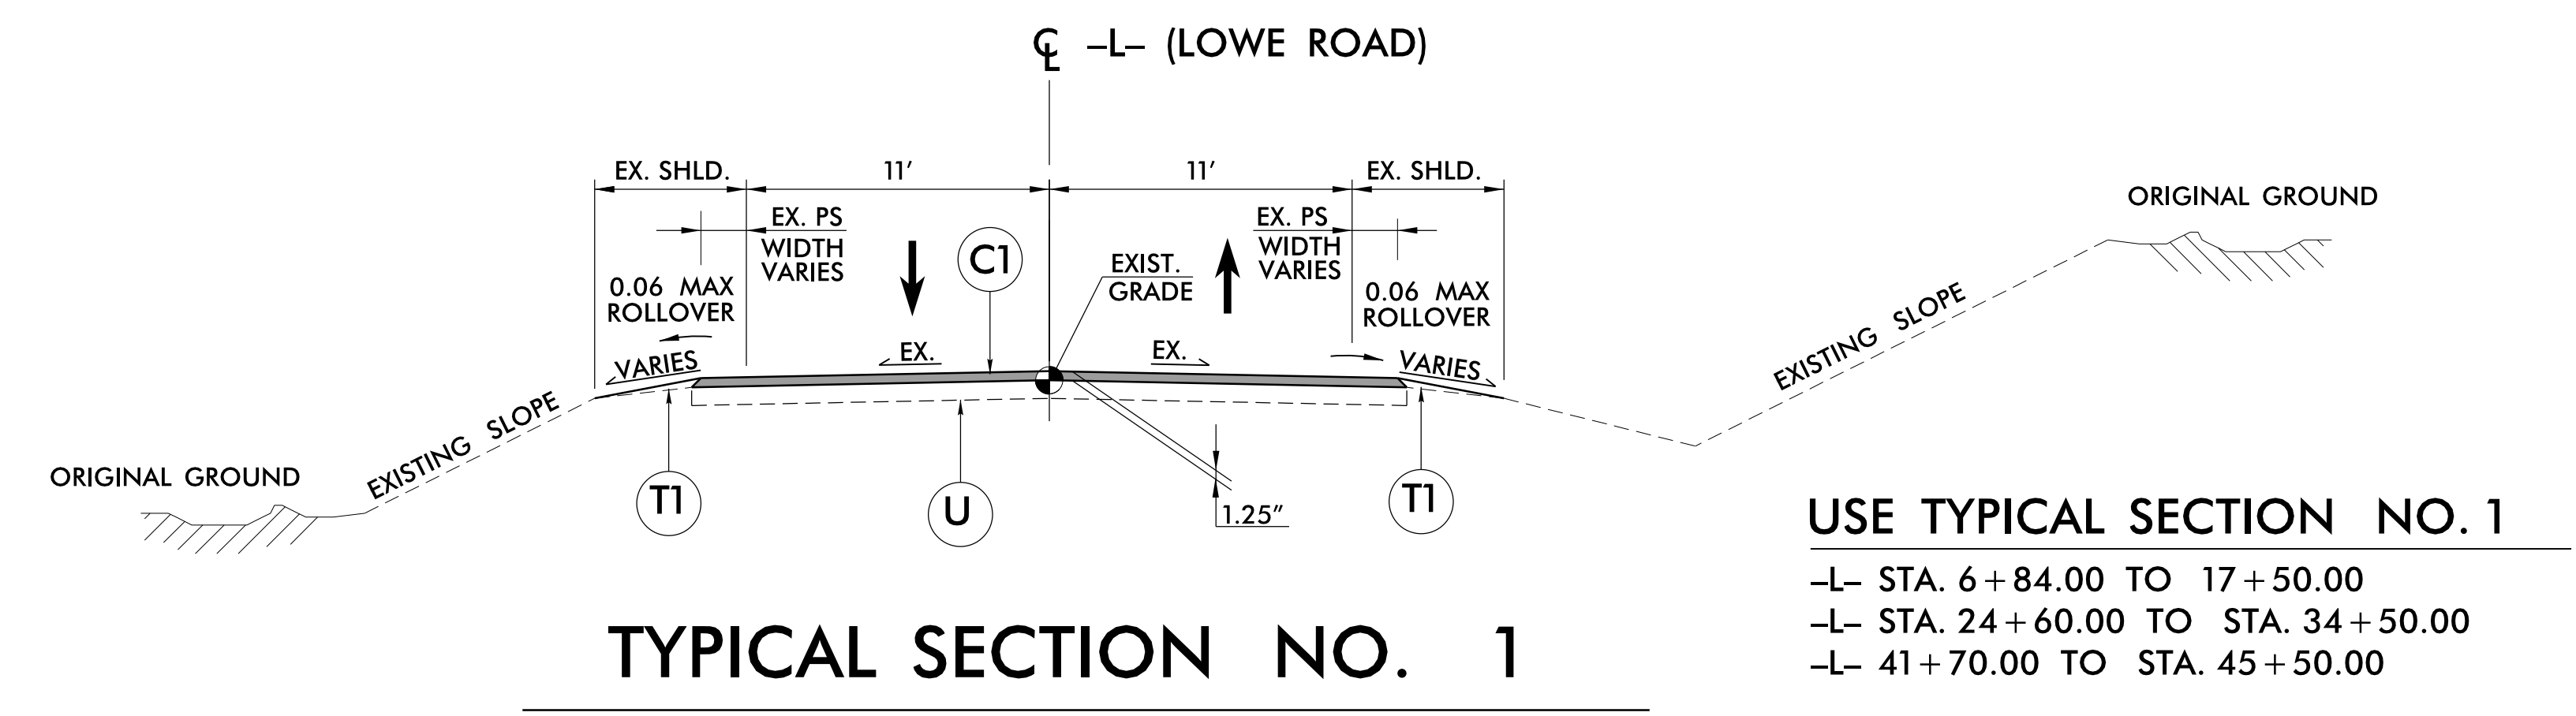


FINAL PAVEMENT SCHEDULE

PROJECT REFERENCE NO. B-5333	SHEET NO. 2A-1
ROADWAY DESIGN ENGINEER 	PAVEMENT DESIGN ENGINEER 
2/7/2017	2/7/2017
DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED	
 Dewberry	
2610 WYCLIFF ROAD SUITE 410 RALEIGH, NC 27607 PHONE: 919.881.9239 NC CCR NO. F-2929	

ITEM	DESCRIPTION	ITEM	DESCRIPTION	ITEM	DESCRIPTION
C1	PROPOSED APPROXIMATE 1.25" ASPHALT CONC. SURFACE COURSE, TYPE SF9.5A, AT AN AVERAGE RATE OF 137.50 LBS. PER SQ. YARD.	E2	PROP. APPROX. 4.5" ASPHALT CONCRETE BASE COURSE, TYPE B25.0B, AT AN AVERAGE RATE OF 513 LBS. PER SQ. YARD.	T1	AGGREGATE SHOULDER BORROW
C2	PROPOSED APPROXIMATE 2.5" ASPHALT CONC. SURFACE COURSE, TYPE SF9.5A, AT AN AVERAGE RATE OF 137.50 LBS. PER SQ. YARD IN EACH OF TWO LAYERS.	E3	PROP. VAR. DEPTH ASPHALT CONC. BASE COURSE, TYPE B25.0B, AT AN AVERAGE RATE OF 114 LBS. PER SQ. YD. PER 1" DEPTH, TO BE PLACED IN LAYERS NOT GREATER THAN 5.5" IN DEPTH OR LESS THAN 3" IN DEPTH.	U	EXISTING PAVEMENT
C3	PROP. VAR. DEPTH ASPHALT CONC. SURFACE COURSE, TYPE SF9.5A, AT AN AVERAGE RATE OF 110 LBS. PER SQ. YARD PER 1" DEPTH TO BE PLACED IN LAYERS NOT TO EXCEED 1.5" IN DEPTH.	R1	SHOULDER BERM GUTTER	V	MILLING (SEE MILLING DETAIL ON THIS SHEET)
E1	PROP. APPROX. 4.0" ASPHALT CONCRETE BASE COURSE, TYPE B25.0B, AT AN AVERAGE RATE OF 456 LBS. PER SQ. YARD.	T	EARTH MATERIAL	W	WEDGING (SEE WEDGE DETAIL ON THIS SHEET)

NOTE: PAVEMENT EDGES ARE 1:1 UNLESS OTHERWISE NOTED.



6/2/2017 8:45:04 AM TYP_02A-1.dgn
 2/6/2017 8:45:04 AM TYP_02A-1.dgn
 11:55:30 AM