

NOTES

CONTRACTOR SHALL REMOVE SURFACE CONCRETE TO VERIFY THAT SAWCUT DEPTH WILL NOT DAMAGE EXISTING REINFORCING STEEL OR PRESTRESSED TENDONS.

CONTRACTOR SHALL SAW CUT TO A NOMINAL DEPTH OF 1/2" BUT REINFORCING STEEL AND PRESTRESSED TENDONS SHALL NOT BE DAMAGED.


CONTRACTOR SHALL SAW CUT THE REPAIR AREAS SO THAT THE CORNERS ARE SQUARE AS INDICATED ON THE DETAILS.

ALL REPAIRS ON GIRDER SHALL USE PRESTRESSED CONCRETE GIRDER REPAIR MATERIAL.


FOR PRESTRESSED CONCRETE GIRDER REPAIR, SEE "PRESTRESSED CONCRETE GIRDERS WITH THERMAL SPRAY ANODE" SPECIAL PROVISION.

FOR SHOTCRETE REPAIRS, SEE SPECIAL PROVISIONS.

PRESTRESSED CONCRETE GIRDER REPAIR MAY BE SUBSTITUTED IN LIEU OF SHOTCRETE REPAIRS WITH THE APPROVAL OF THE ENGINEER.

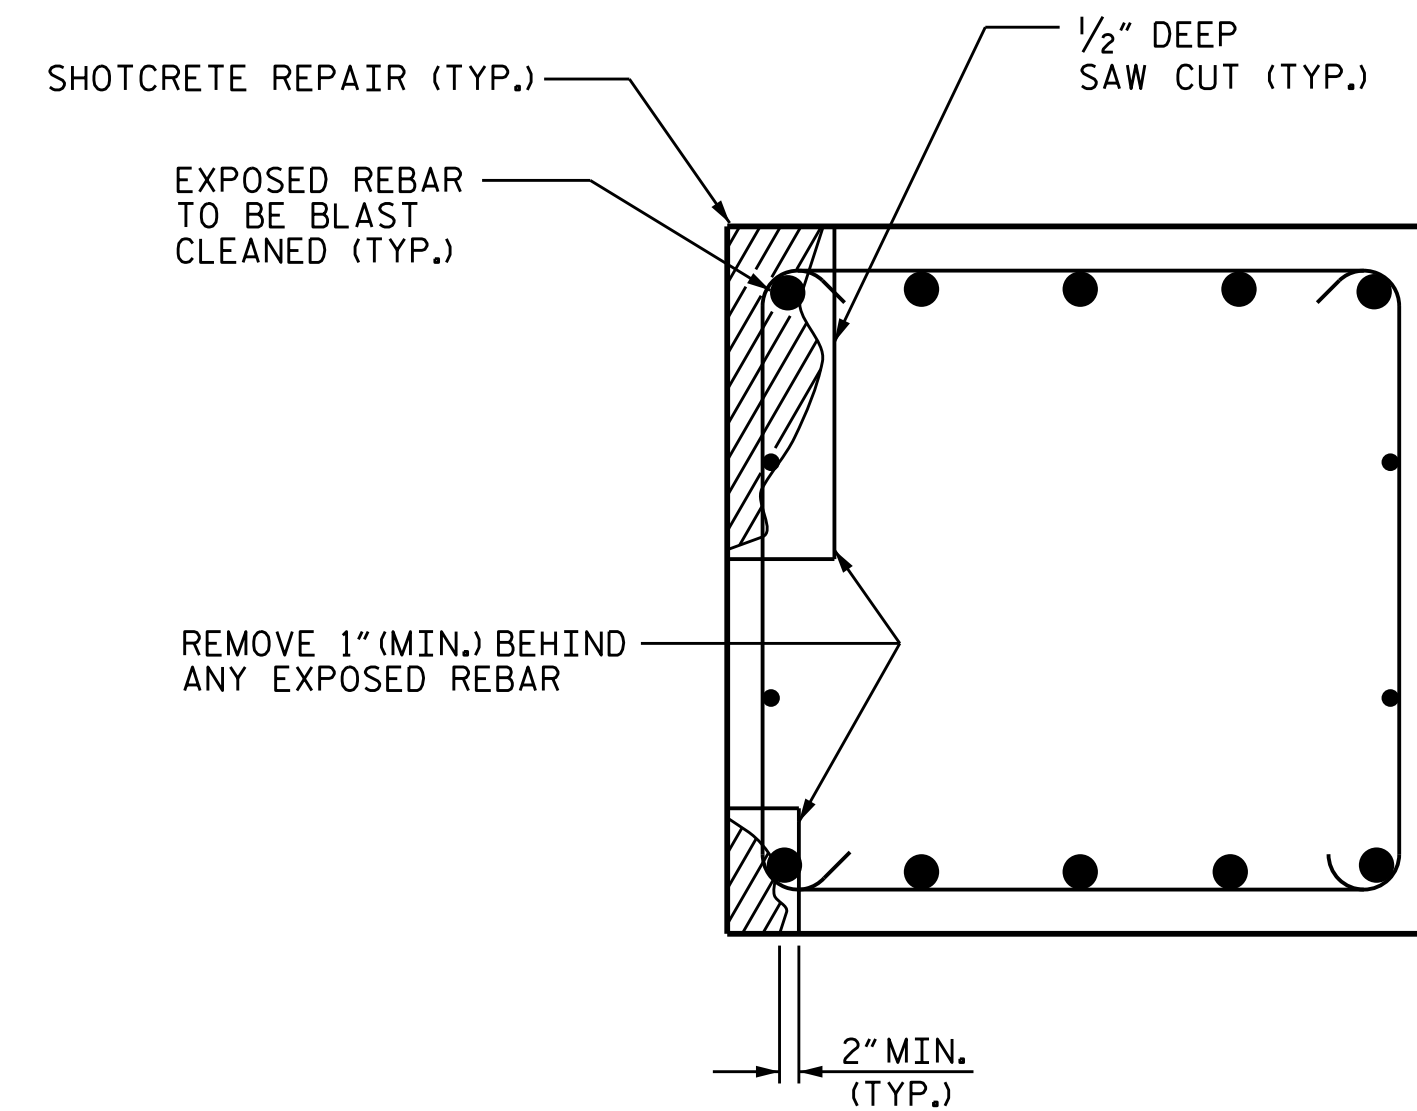

SECTION A-A

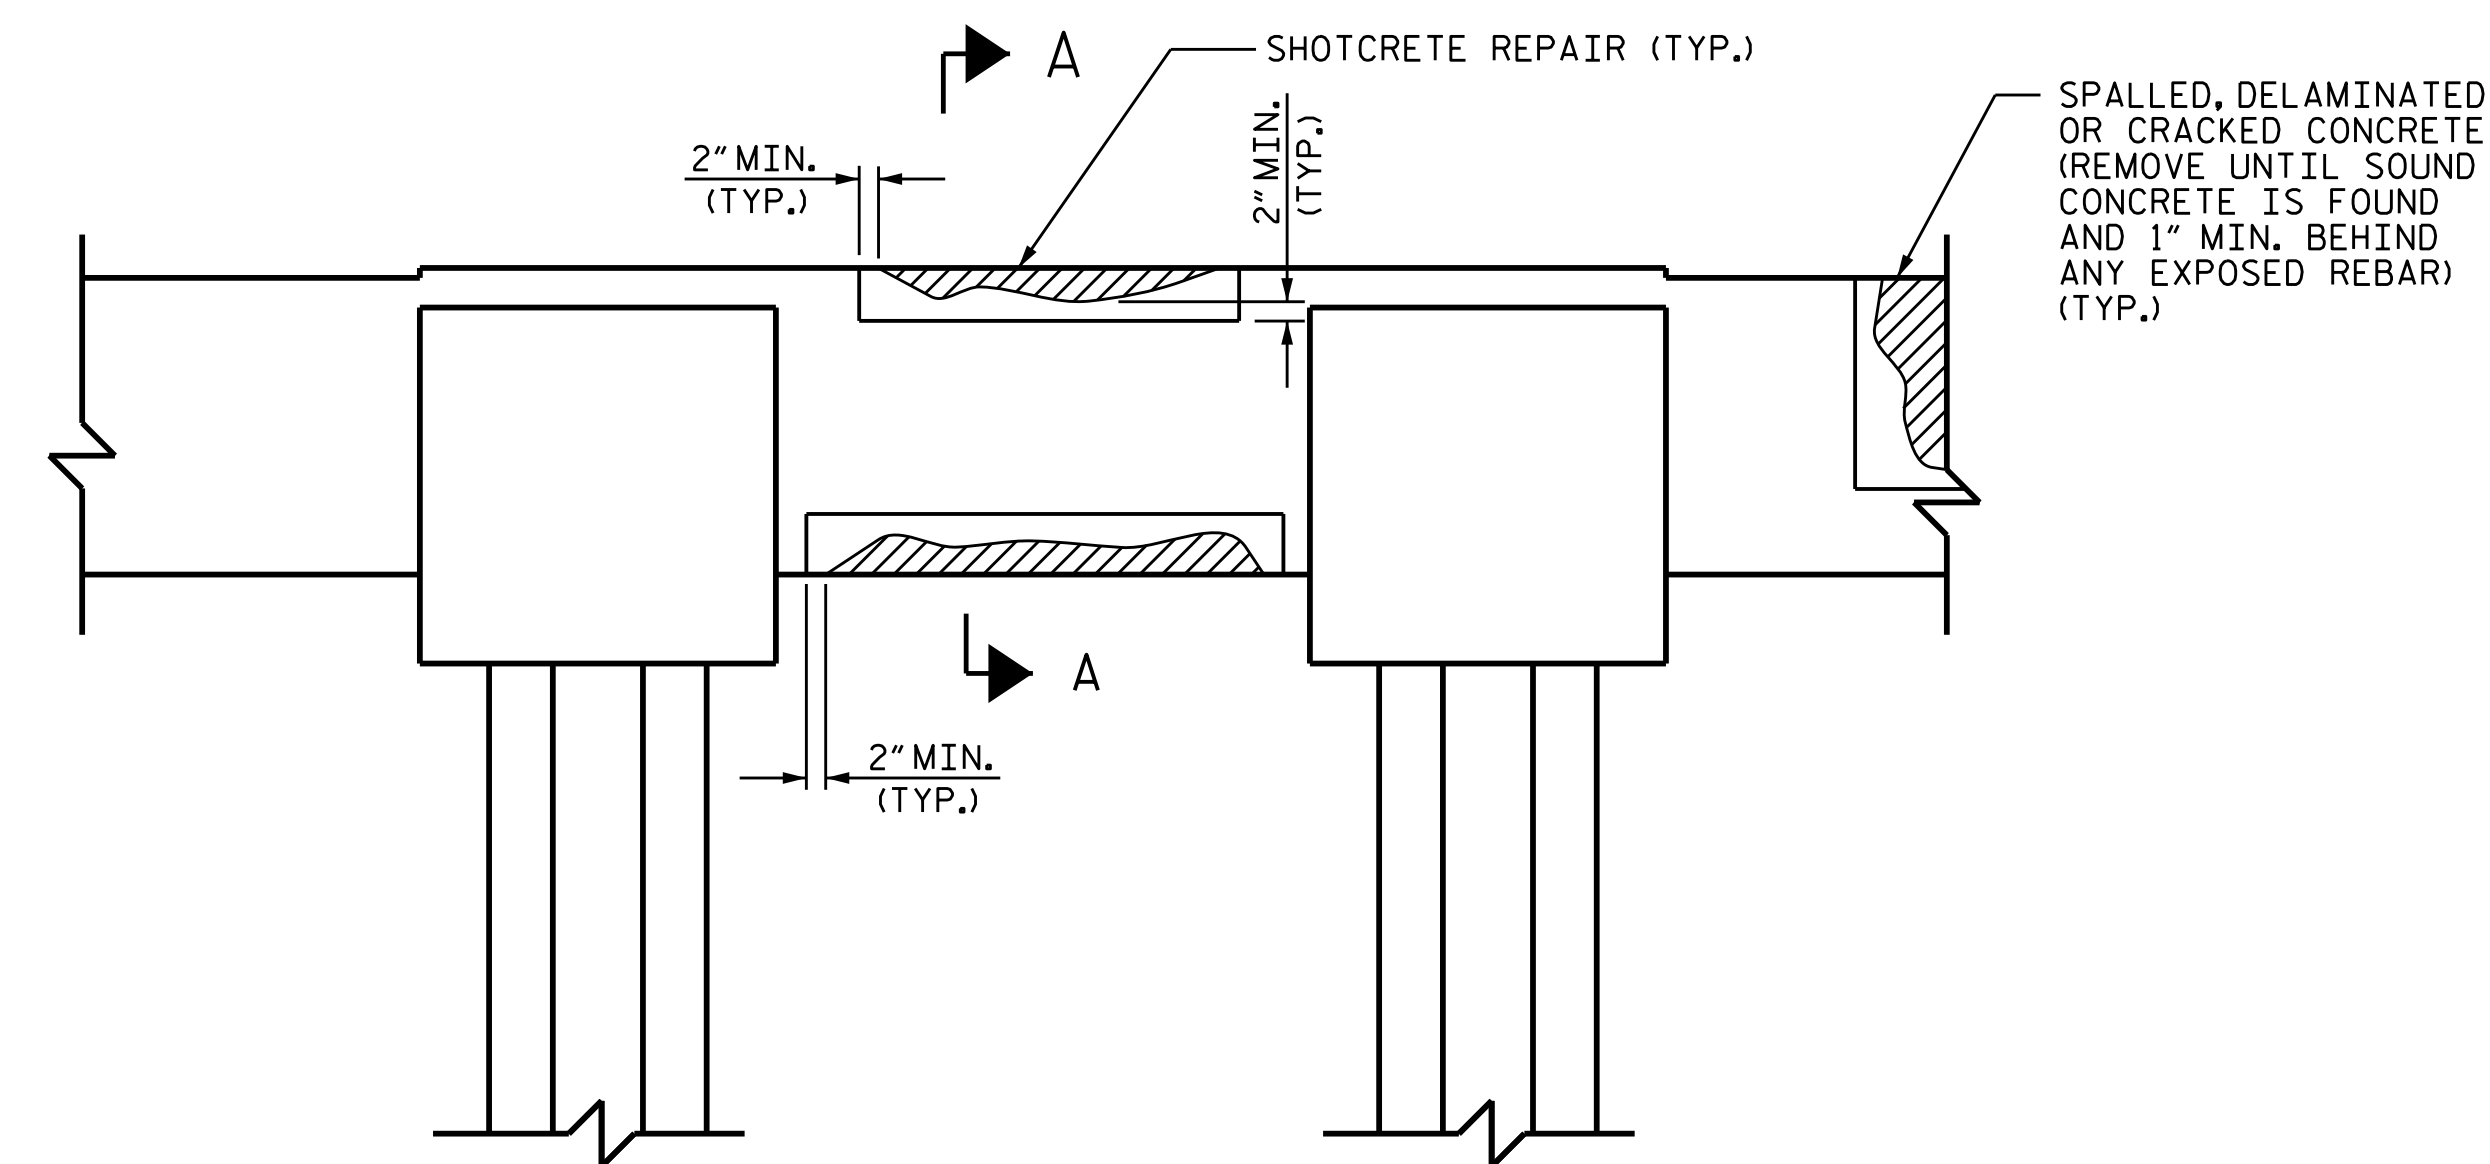

BENT CAP REPAIRS

CAP REPAIR
(COLUMN & FOOTING REPAIRS SIMILAR)

PROJECT NO. B-5939
CARTERET COUNTY
 BRIDGE NO. 6



DocuSigned by:
Greg Dickey
 884E488CE5B4B6...

STATE OF NORTH CAROLINA
 DEPARTMENT OF TRANSPORTATION
 RALEIGH

**TYPICAL
 SUBSTRUCTURE
 REPAIR DETAILS**

DRAWN BY : R.WEISZ DATE : 2/2017
 CHECKED BY : P.BRYANT DATE : 2/2017

DOCUMENT NOT CONSIDERED
 FINAL UNLESS ALL
 SIGNATURES COMPLETED

REVISIONS						SHEET NO.
NO.	BY:	DATE:	NO.	BY:	DATE:	TOTAL SHEETS
1			3			S2-131
2			4			-