
| PAVEMENT SCHEDULE | | | | | |
|-------------------|--|--|--|--|--|
| Υ | SHOULDER RECONSTRUCTION (ASB) | | | | |
| C1 | PROP. APPROX. 1½" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD. | | | | |
| C2 | PROP. APPROX. $11\!\!/2$ " ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD. | | | | |
| СЗ | PROP. APPROX. 1" ASPHALT CONCRETE SURFACE COURSE, TYPE SF9.5A, AT AN AVERAGE RATE OF 110 LBS. PER SQ. YD. | | | | |
| E1 | PROP. APPROX. 5.5" ASPHALT CONCRETE BASE COURSE, TYPE B25.0B, AT AN AVERAGE RATE OF 627 LBS. PER SQ. YD. | | | | |
| V1 | MILL ASPHALT PAVEMENT APPROX. 1 $1^{\prime}2^{\prime\prime}$ AS DIRECTED BY THE ENGINEER. | | | | |
| Z | INCIDENTAL MILLING AS DIRECTED BY THE ENGINEER. | | | | |

NOTE: PAVEMENT EDGE SLOPES ARE 1:1 UNLESS SHOWN OTHERWISE.

MILL BRIDGE APPROACHES 100' TO PROVIDE A SMOOTH TRANSITION AS DIRECTED.


MILL INTO GUTTER LINE WHERE SHOWN AND AS DIRECTED.

MAINTAIN PROPER CROWN FOR DRAINAGE OF THE ROAD SURFACE.

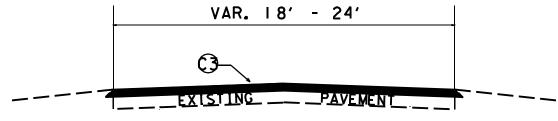

TYPICAL SECTION NO. 11

(MAP 4-10, 12-34, 36-44)

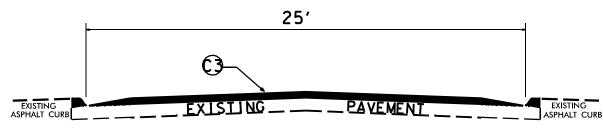

TYPICAL SECTION NO. 12

(MAP 35)

| PROJ. REFERENCE NO | | SHEET NO. | | TOTAL SHEET | 5 |
|-------------------------|-------|-----------|-----|-------------|---|
| CLEVELAND CO. 2017-2 | :01 B | | 6 | | |
| STATE PROJ. NO. | F. A. | PROJ. | NO. | DESCRIPTION | |
| 201 7CPT. 12. 18. 10231 | | | | | |
| 201 7CPT. 12. 18. 20231 | | | | | |
| | | | | | |
| | | | | | |

