


6/2/99


PAVEMENT SCHEDULE

| | | | |
|----|---|----|--|
| C1 | PROP. APPROX. 1½" ASPHALT CONCRETE SURFACE COURSE, TYPE SF9.5A, AT AN AVERAGE RATE OF 165 LBS. PER SQ. YD. | E5 | PROP. APPROX. 14" ASPHALT CONCRETE BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 532 LBS. PER SQ. YD. IN EACH OF THREE LAYERS. |
| C2 | PROP. APPROX. 2" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 224 LBS. PER SQ. YD. | J | PROP. 6" AGGREGATE BASE COURSE. |
| C3 | PROP. APPROX. 1.5" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD. | N | GEOTEXTILE FOR PAVEMENT STABILIZATION (SEE CHART ON THIS SHEET FOR LOCATIONS) |
| C4 | PROP. VAR. DEPTH ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 112 LBS. PER SQ. YD. PER 1" DEPTH. TO BE PLACED IN LAYERS NOT TO EXCEED 2" IN DEPTH. | P | PRIME COAT AT A RATE OF 0.35 GAL. PER SQ. YD. |
| C5 | PROP. APPROX. 1.5" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD. | R1 | 2'-6" CONCRETE CURB AND GUTTER (STD. 846.01) |
| C6 | PROP. APPROX. 3" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD. IN EACH OF TWO LAYERS. | R2 | CONCRETE EXPRESSWAY GUTTER (STD. 846.01) |
| C7 | PROP. VAR. DEPTH ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 112 LBS. PER SQ. YD. PER 1" DEPTH. TO BE PLACED IN LAYERS NOT TO EXCEED 2" IN DEPTH. | R3 | 5" MONOLITHIC CONCRETE ISLAND (KEYED IN) (STD. 852.01) |
| C8 | PROP. APPROX. 1½" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5D, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD. | R4 | DOUBLE FACED CONCRETE BARRIER TYPE T, T1 AND T2 (STD. 854.02) |
| C9 | PROP. APPROX. 3" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5D, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD. IN EACH OF TWO LAYERS. | R5 | CONCRETE SHOULDER BERM GUTTER (STD. 846.01) |
| D1 | PROP. APPROX. 2.5" ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.0B, AT AN AVERAGE RATE OF 285 LBS. PER SQ. YD. | T | EARTH MATERIAL |
| D2 | PROP. VAR. DEPTH ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.0B, AT AN AVERAGE RATE OF 114 LBS. PER SQ. YD. PER 1" DEPTH. TO BE PLACED IN LAYERS NOT LESS THAN 2½" IN DEPTH OR GREATER THAN 4" IN DEPTH. | U | EXISTING PAVEMENT |
| D3 | PROP. APPROX. 4" ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.0C, AT AN AVERAGE RATE OF 456 LBS. PER SQ. YD. | V1 | INCIDENTAL MILLING BITUMINOUS PAVEMENT (SEE DETAIL) |
| D4 | PROP. APPROX. 4" ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.0D, AT AN AVERAGE RATE OF 456 LBS. PER SQ. YD. | V2 | MILLING BITUMINOUS PAVEMENT, 1½" DEPTH |
| E1 | PROP. APPROX. 4" ASPHALT CONCRETE BASE COURSE, TYPE B25.0B, AT AN AVERAGE RATE OF 456 LBS. PER SQ. YD. | V3 | MILLING BITUMINOUS PAVEMENT, 3" DEPTH |
| E2 | PROP. VAR. DEPTH ASPHALT CONCRETE BASE COURSE, TYPE B25.0B, AT AN AVERAGE RATE OF 114 LBS. PER SQ. YD. PER 1" DEPTH. TO BE PLACED IN LAYERS NOT LESS THAN 4" IN DEPTH OR GREATER THAN 5½" IN DEPTH. | W | VARIABLE DEPTH ASPHALT PAVEMENT (SEE STANDARD WEDGING DETAIL BELOW) |
| E3 | PROP. APPROX. 8" ASPHALT CONCRETE BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 456 LBS. PER SQ. YD. IN EACH OF TWO LAYERS. | | |

NOTE: PAVEMENT EDGE SLOPES ARE 1:1 UNLESS SHOWN OTHERWISE.

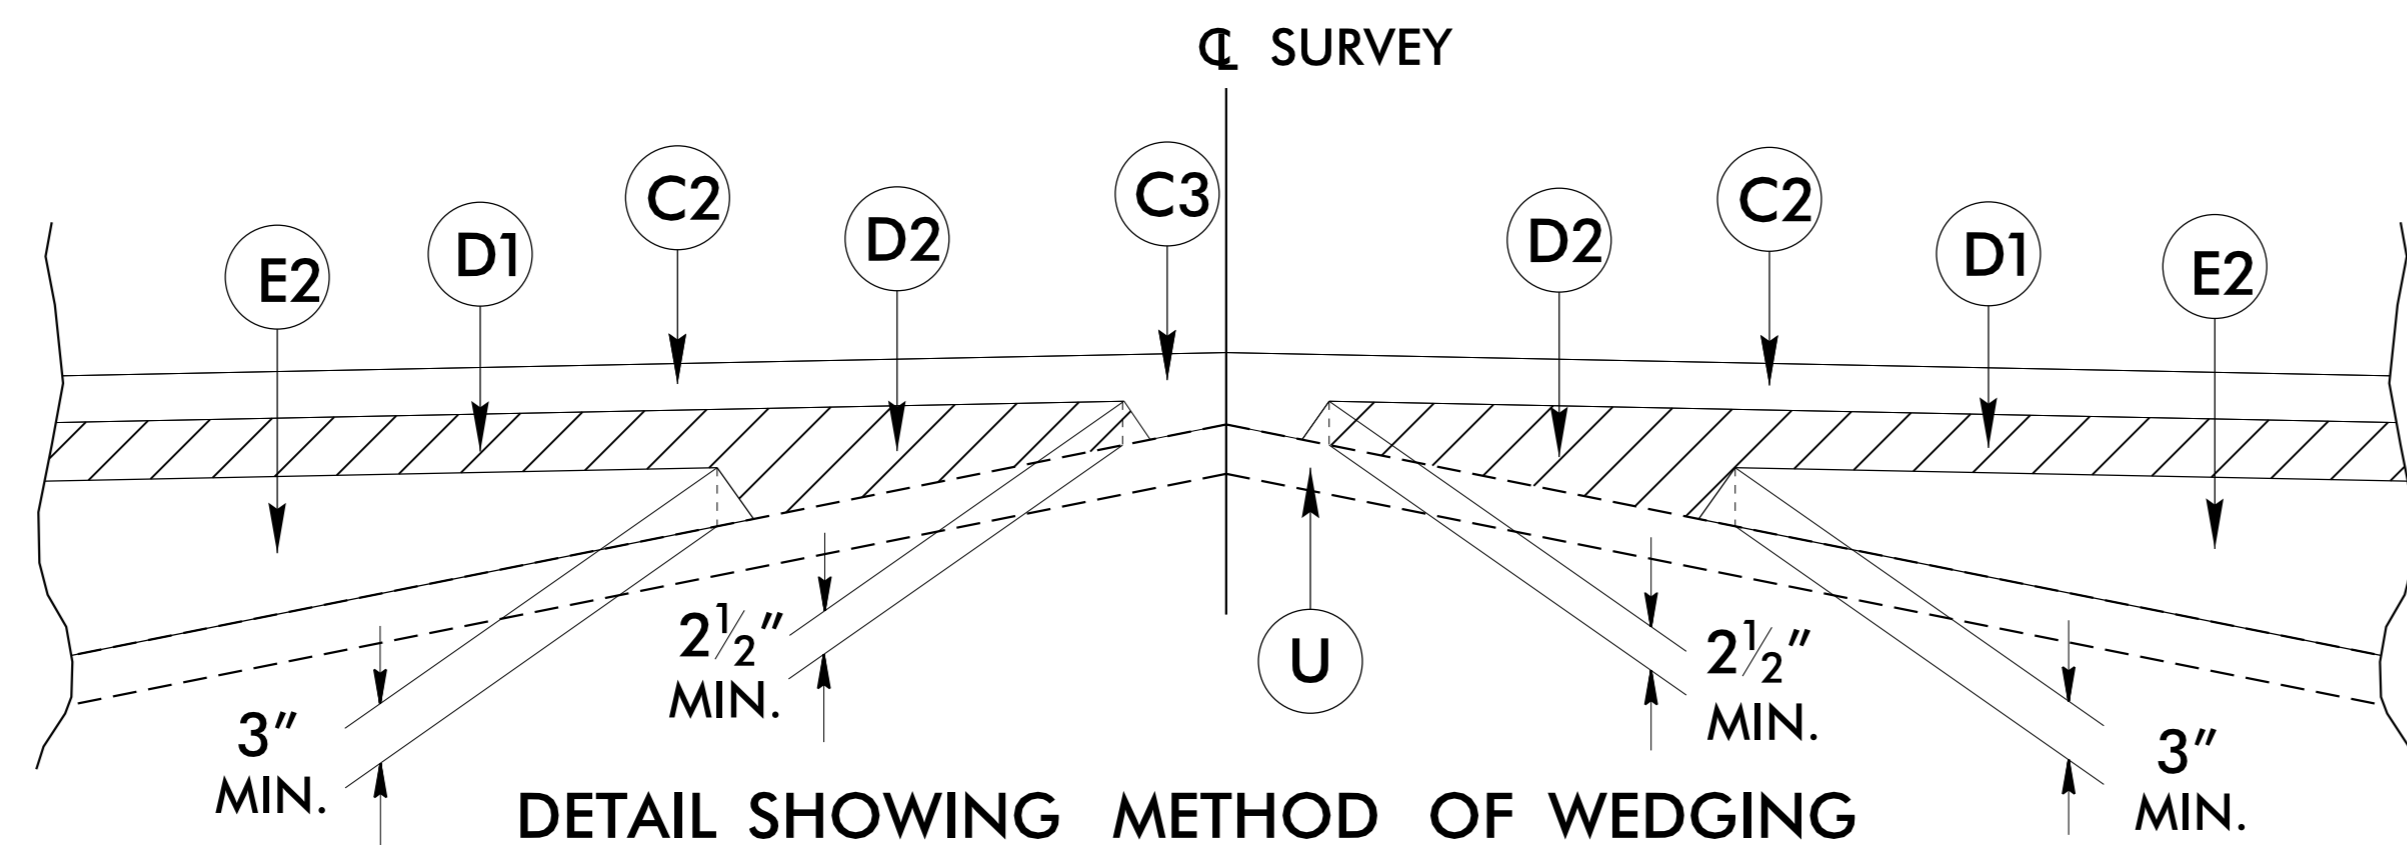


| | |
|--|------------------------------|
| PROJECT REFERENCE NO. I-5000 | SHEET NO. 2A-1 |
| ROADWAY DESIGN ENGINEER | PAVEMENT DESIGN ENGINEER |
| DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED | |

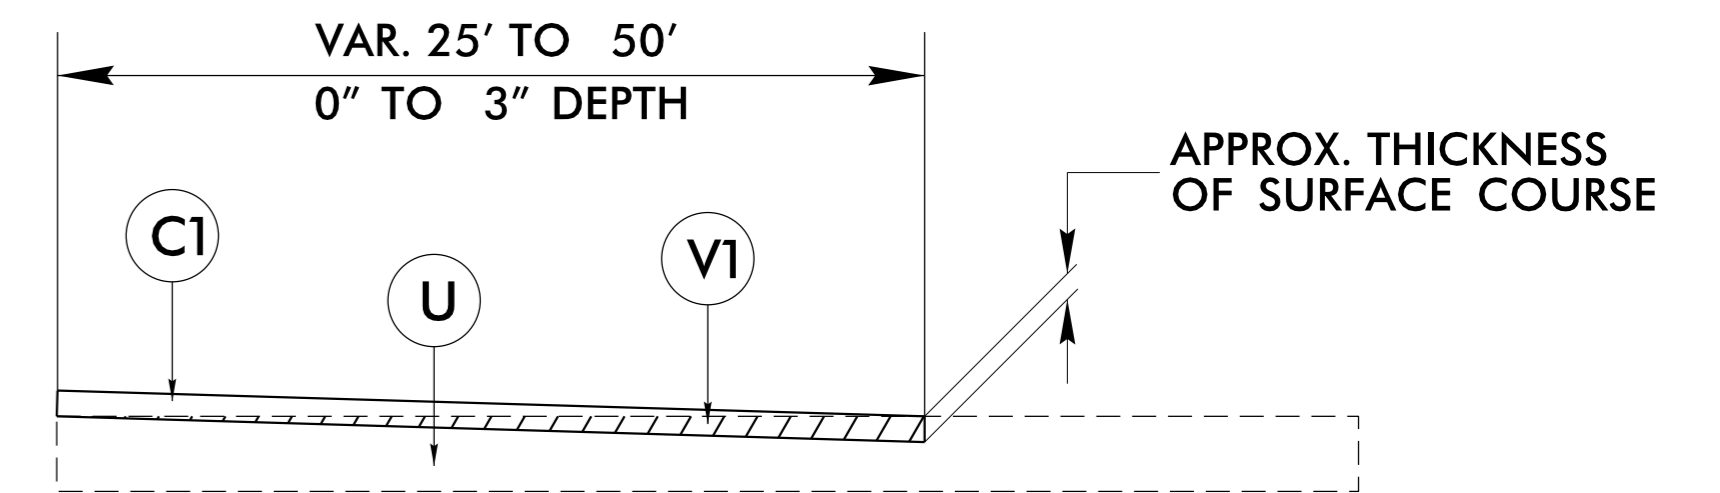

INCIDENTAL MILLING DETAIL

USE MILLING DETAIL AT RESURFACING TIES

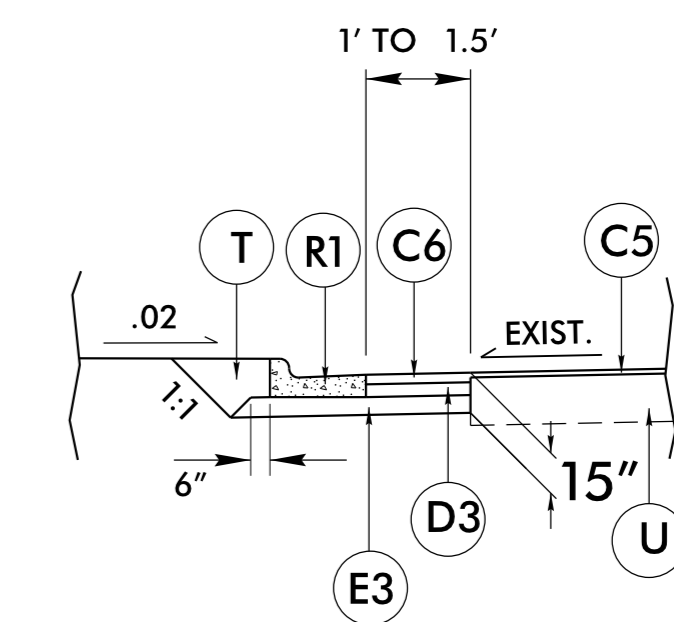


NARROW WIDENING DETAIL

USE NARROW WIDENING DETAIL FOR CURB AND GUTTER REPLACEMENT (MIRROR FOR RIGHT SIDE APPLICATION)

GEOTEXTILE FOR PAVEMENT STABILIZATION (LOCATIONS & DETAIL)
(THE FOLLOWING AREAS SHOULD BE INVESTIGATED FOR NEED DURING CONSTRUCTION)

| LINE | STATIONS | SY |
|-------|----------------|-------|
| -Y2- | 21+50 TO 25+00 | 1,400 |
| -Y3- | 20+75 TO 23+25 | 778 |
| -RPA- | 15+00 TO 23+41 | 2,153 |
| -RPD- | 29+00 TO 34+50 | 2,471 |

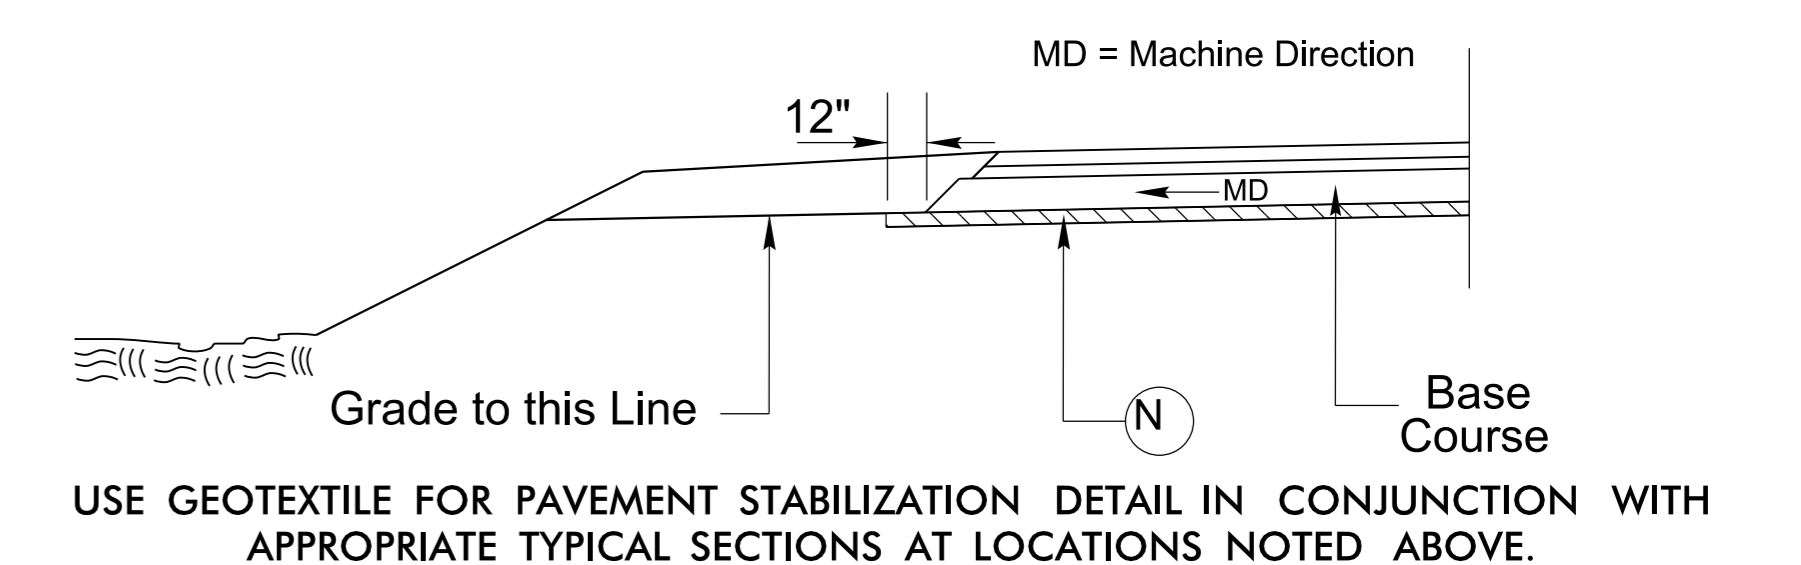

07-MAR-2017 17:57 I-5000-RdJ.txd.dgn