


PROJECT REFERENCE NO.	SHEET NO.
I-5000	EC-16/CONST.6
RW SHEET NO.	
ROADWAY DESIGN ENGINEER	HYDRAULICS ENGINEER

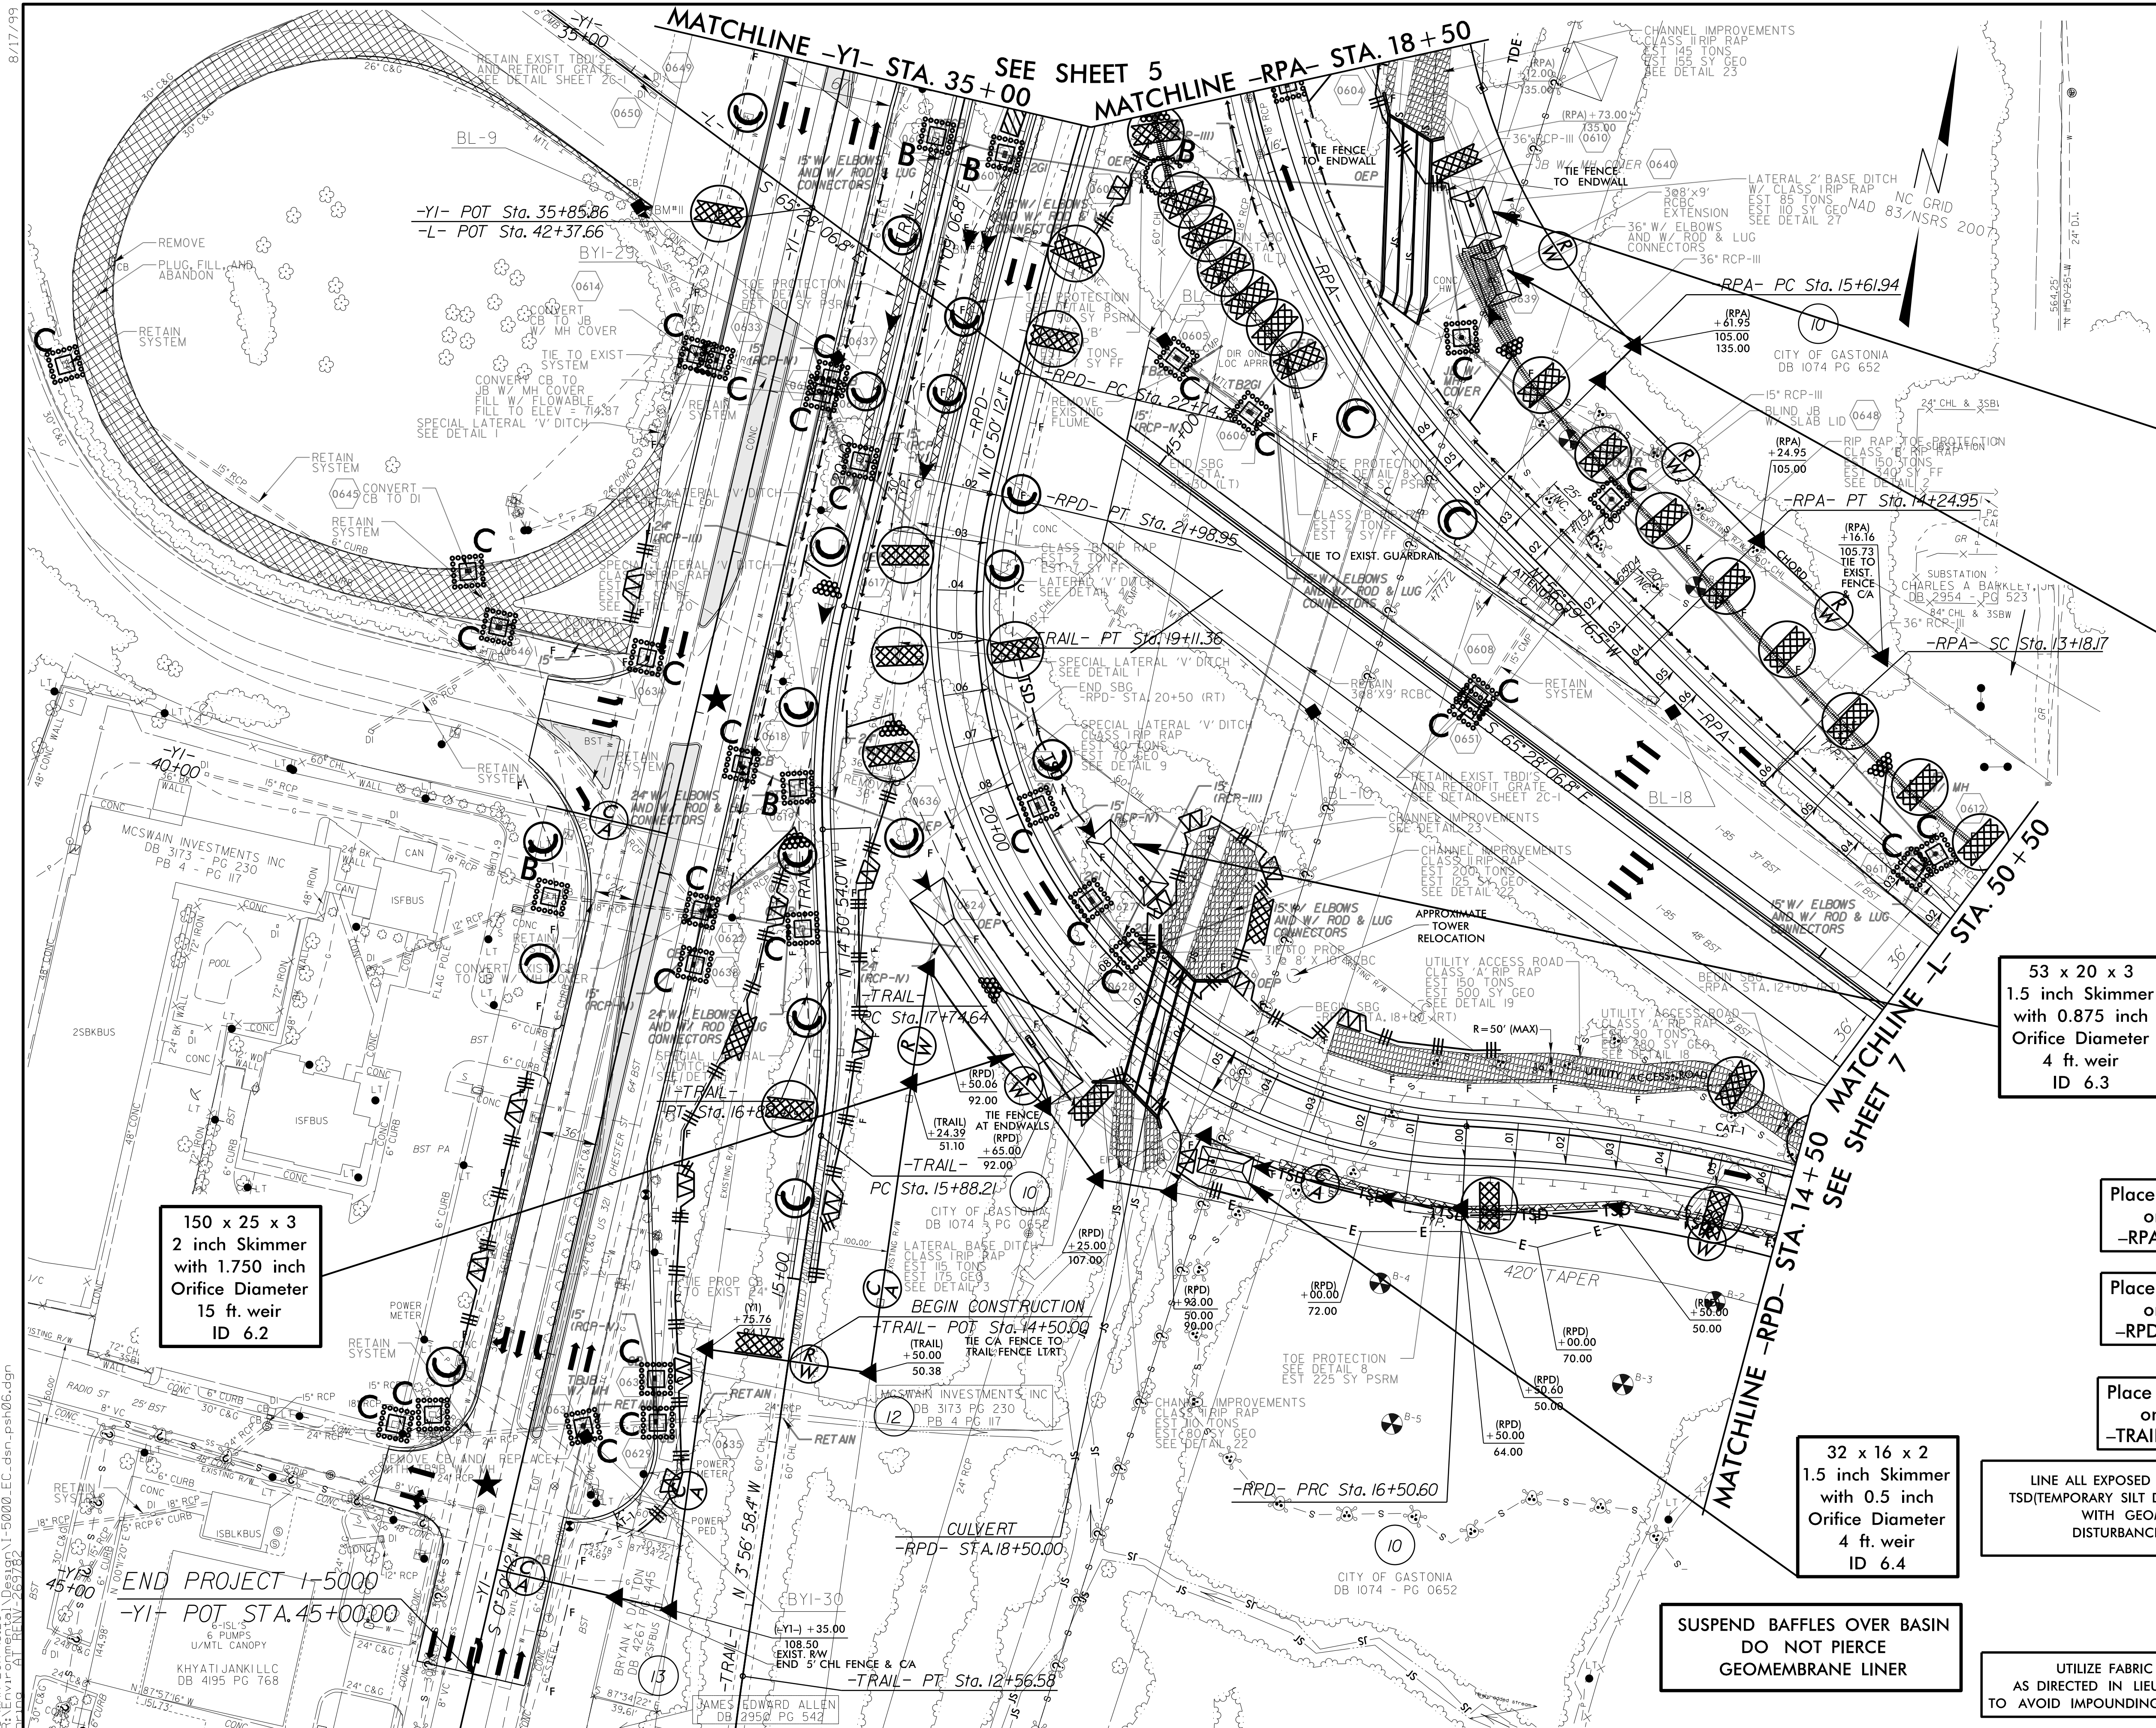

35 x 22 x 3
1.5 inch Skimmer
with 1.0 inch
Orifice Diameter
6 ft. weir
(See Tiered Skimmer
Basin Detail)
ID 6.1

Modified Silt Basin
Type 'B'
35 x 22 x 3
6 ft. weir
(See Tiered Skimmer
Basin Detail)
ID 6.1

53 x 20 x 3
1.5 inch Skimmer
with 0.875 inch
Orifice Diameter
4 ft. weir
ID 6.3

150 x 25 x 3
2 inch Skimmer
with 1.750 inch
Orifice Diameter
15 ft. weir
ID 6.2

Place Matting for Erosion Control
on Slope as Work Allows.
-RPA- Sta. 12+50 to Sta. 18+50

Place Matting for Erosion Control
on Slope as Work Allows.
-RPD- Sta. 14+50 to Sta. 20+00

Place Matting for Erosion Control
on Slope as Work Allows.
-TRAIL- Sta. 17+30 to Sta. 22+00

LINE ALL EXPOSED SOIL IN BASIN 6.4 AND ASSOCIATED
TSD (TEMPORARY SILT DITCH) FROM -RPD- 13+10 TO 17+72 LT.
WITH GEOMEMBRANE LINER TO PREVENT
DISTURBANCE OF CONTAMINATED SOIL AREA

32 x 16 x 2
1.5 inch Skimmer
with 0.5 inch
Orifice Diameter
4 ft. weir
ID 6.4

SUSPEND BAFFLES OVER BASIN
DO NOT PIERCE
GEOMEMBRANE LINER

UTILIZE FABRIC INSERT INLET PROTECTION DEVICE
AS DIRECTED IN LIEU OF ROCK INLET SEDIMENT TRAP TYPE C
TO AVOID IMPOUNDING RUNOFF ON ROADWAY OPEN TO PUBLIC

8/17/1995
I:\MAR-2011\5266\Drawings\I-5000-EC.dwg - psh06.dgn
REV: 1-11-11
DATE: 11/11/11
BY: JAC