LOAD AND RESISTANCE FACTOR RATING (LRFR) SUMMARY FOR REINFORCED CONCRETE BOX CULVERTS

LEVEL		VEHICLE	WEIGHT (W) (TONS)	CONTROLLING LOAD RATING (#)	MINIMUM RATING FACTORS (RF)	TONS = W × RF	STRENGTH I LIMIT STATE									COMMENT NUMBER
							LIVE-LOAD FACTORS (γ_{LL})	MOMENT				SHEAR				
								RATING FACTOR	BOX NO.	ELEMENT TYPE	DISTANCE FROM LEFT END OF ELEMENT (ft)	RATING FACTOR	BOX NO.	ELEMENT TYPE	DISTANCE FROM LEFT END OF ELEMENT (ft)	
DESIGN LOAD RATING		HL-93 (INVENTORY)	N/A	1	1.10	--	1.75	1.10	1	TOP SLAB	3.83	1.39	1	BOTTOM SLAB	0.81	
		HL-93 (OPERATING)	N/A		1.43	--	1.35	1.43	1	TOP SLAB	3.83	1.80	1	BOTTOM SLAB	0.81	
		HS-20 (INVENTORY)	36.000	2	1.22	43.85	1.75	1.22	1	TOP SLAB	3.83	1.82	1	TOP SLAB	0.81	
		HS-20 (OPERATING)	36.000		1.58	56.84	1.35	1.58	1	TOP SLAB	3.83	2.36	1	TOP SLAB	0.81	
LEGAL LOAD RATING	SINGLE VEHICLE (SV)	SNSH	13.500		2.22	29.91	1.40	2.22	1	TOP SLAB	3.83	3.31	1	TOP SLAB	0.81	
		SNGARBS2	20.000		2.07	41.36	1.40	2.07	1	TOP SLAB	3.83	3.10	1	TOP SLAB	0.81	
		SNAGRIS2	22.000		2.22	48.75	1.40	2.22	1	TOP SLAB	3.83	3.31	1	TOP SLAB	0.81	
		SNCOTTS3	27.250	3	1.38	37.57	1.40	1.38	1	TOP SLAB	3.83	1.73	1	BOTTOM SLAB	0.81	
		SNAGGRS4	34.925		1.81	63.27	1.40	1.81	1	TOP SLAB	3.83	2.28	1	BOTTOM SLAB	0.81	
		SNS5A	35.550		1.64	58.24	1.40	1.64	1	TOP SLAB	3.83	2.05	1	BOTTOM SLAB	0.81	
		SNS6A	39.950		1.64	65.44	1.40	1.64	1	TOP SLAB	3.83	2.05	1	BOTTOM SLAB	0.81	
		SNS7B	42.000		1.64	68.80	1.40	1.64	1	TOP SLAB	3.83	2.05	1	BOTTOM SLAB	0.81	
	TRUCK TRACTOR SEMI-TRAILER (TTST)	TNAGRIT3	33.000		2.22	73.13	1.40	2.22	1	TOP SLAB	3.83	3.31	1	TOP SLAB	0.81	
		TNT4A	33.075		1.64	54.18	1.40	1.64	1	TOP SLAB	3.83	2.05	1	BOTTOM SLAB	0.81	
		TNT6A	41.600		1.64	68.15	1.40	1.64	1	TOP SLAB	3.83	2.05	1	BOTTOM SLAB	0.81	
		TNT7A	42.000		1.64	68.80	1.40	1.64	1	TOP SLAB	3.83	2.05	1	BOTTOM SLAB	0.81	
		TNT7B	42.000		1.64	68.80	1.40	1.64	1	TOP SLAB	3.83	2.05	1	BOTTOM SLAB	0.81	
		TNAGRIT4	43.000		1.57	67.33	1.40	1.57	1	TOP SLAB	3.83	1.97	1	BOTTOM SLAB	0.81	
		TNAGT5A	45.000		1.60	72.05	1.40	1.60	1	TOP SLAB	3.83	2.01	1	BOTTOM SLAB	0.81	
		TNAGT5B	45.000		1.64	73.72	1.40	1.64	1	TOP SLAB	3.83	2.05	1	BOTTOM SLAB	0.81	

LOAD FACTORS:

DESIGN LOAD RATING FACTORS

LOAD TYPE	MAX FACTOR	MIN FACTOR
DC	1.25	0.90
DW	1.50	0.65
EV	1.30	0.90
EH	1.35	0.90
ES	1.35	0.90
LS	1.75	--
WA	1.00	--

NOTE:

RATING FACTORS ARE BASED ON THE STRENGTH I LIMIT STATE.
THIS LRFR RATING APPLIES TO THE LEFT EXTENSION ONLY.

COMMENTS:

1. THIS LRFR RATING APPLIES TO THE LEFT EXTENSION ONLY.
2.
3.
4.

(#) CONTROLLING LOAD RATING

(1) DESIGN LOAD RATING (HL-93)

(2) DESIGN LOAD RATING (HS-20)

(3) LEGAL LOAD RATING **

** SEE CHART FOR VEHICLE TYPE

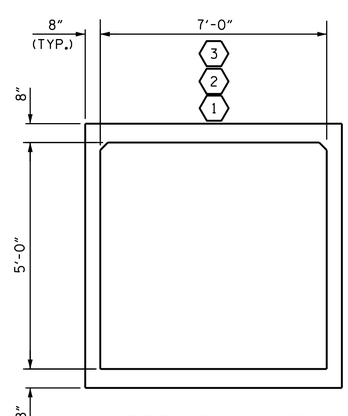

LRFR SUMMARY

PROJECT NO. R-2519B

YANCEY COUNTY

STATION: 155+44.57 -L-

SHEET 6 OF 11

STATE OF NORTH CAROLINA
DEPARTMENT OF TRANSPORTATION
RALEIGH

STANDARD
LRFR SUMMARY FOR REINFORCED CONCRETE BOX CULVERTS
LEFT EXTENSION
(NON-INTERSTATE TRAFFIC)

NORTH CAROLINA PROFESSIONAL SEAL 20125 ENGINEER MARSHALL G. CHEEK, JR.

Marshall G. Cheek, Jr.
8/27/2014 6549DEEBAA3B405...

REVISIONS						SHEET NO.
NO.	BY:	DATE:	NO.	BY:	DATE:	C-35
1			3			TOTAL SHEETS
2			4			87

STD. NO. LRFR5

STR. #9

ASSEMBLED BY :	J.R. MCROY	DATE :	06/2013
CHECKED BY :	W.J. HARRIS	DATE :	07/2013
DRAWN BY : WMC	7/11		
CHECKED BY : GM	7/11		

$$$$$$$SYSTIME$$$$$
$$$$$$$$$$$$$$$$$$$$$$$$$$DGN$$$$$$$$$$$$$$$$$$$$$$$$
$$$$USERNAME$$$$