AT AN AVERAGE RATE OF 456 LBS. PER SQ. YD.


STANDARD WEDGING DETAIL

		Ρ,	AVEMENT DESIGN)		
C1	PROP. APPROX. 3" ASPHALT CONCRETE SURFACE COURSE, TYPE SF9.5A, AT AN AVERAGE RATE OF 165 LBS. PER SQ. YD. IN EACH OF TWO LAYERS.	E2	PROP. APPROX. $4\frac{1}{2}$ " ASPHALT CONCRETE BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 513 LBS. PER SQ. YD.	R5	CONCRETE MOUNTABLE MEDIAN (SEE SHEET No. 2C-3 FOR SPECIAL DETAILS).
C2	PROP. APPROX. 1½" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD.	E3	PROP. APPROX. 11" ASPHALT CONCRETE BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 627 LBS. PER SQ. YD. IN EACH OF TWO LAYERS.	S	4" CONCRETE SIDEWALK.
C3	PROP. APPROX. 3" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD IN EACH OF TWO LAYERS.	E4	PROP. VAR. DEPTH ASPHALT CONCRETE BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 114 LBS. PER SQ. YD. PER 1" DEPTH, TO BE PLACED IN LAYERS NOT LESS THAN 3" IN DEPTH OR GREATER THAN 5½" IN DEPTH.	Т	EARTH MATERIAL.
C4	PROP. VAR. DEPTH ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 112 LBS. PER SQ. YD. PER 1" DEPTH, TO BE PLACED IN LAYERS NOT LESS THAN 1½" IN DEPTH OR GREATER THAN 2" IN DEPTH.	R1	2'-6" CONCRETE CURB & GUTTER.	U	EXISTING PAVEMENT.
D1	PROP. APPROX. 4" ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.0C, AT AN AVERAGE RATE OF 456 LBS. PER SQ. YD.	R2	4" CONCRETE ISLAND COVER.	V1	1½" MILLING.
D2	PROP. VAR. DEPTH ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.OC, AT AN AVERAGE RATE OF 114 LBS. PER SQ. YD. PER 1" DEPTH, TO BE PLACED IN LAYERS NOT LESS THAN 2½" IN DEPTH OR GREATER THAN 4" IN DEPTH.	R3	5" MONOLITHIC CONCRETE ISLAND (SURFACE MOUNTED).	V2	VARIABLE MILLING (MAXIMUM 2"). SEE SHEET No. 2B-1 FOR VARIABLE DEPTH MILLING DETAILS AND LOCATIONS.
F1	PROP. APPROX. 4" ASPHALT CONCRETE BASE COURSE, TYPE B25.0C,	R4	5" MONOLITHIC CONCRETE ISLAND (KEYED IN).	W	VARIABLE DEPTH ASPHALT PAVEMENT (SEE STANDARD WEDGING DETAIL

5" MONOLITHIC CONCRETE ISLAND (KEYED IN).

NOTE: PAVEMENT EDGE SLOPES ARE 1:1 UNLESS SHOWN OTHERWISE.

SHEET No. 2A-1).

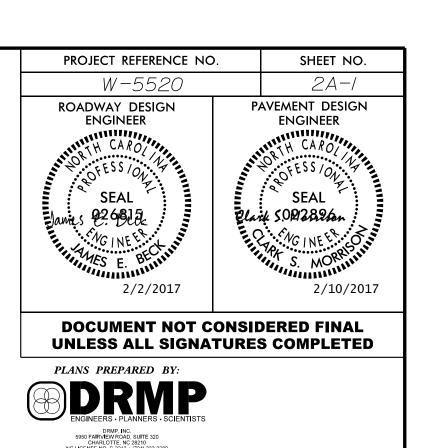


-Y2- STA 12+50.00, -Y3- STA 14+60.00,

-Y4- STA 11+40.00, -Y5- STA 12+80.00,

-Y7- STA 13+40.00, -Y8- STA 11+15.00,

-L4- STA 429+40.00

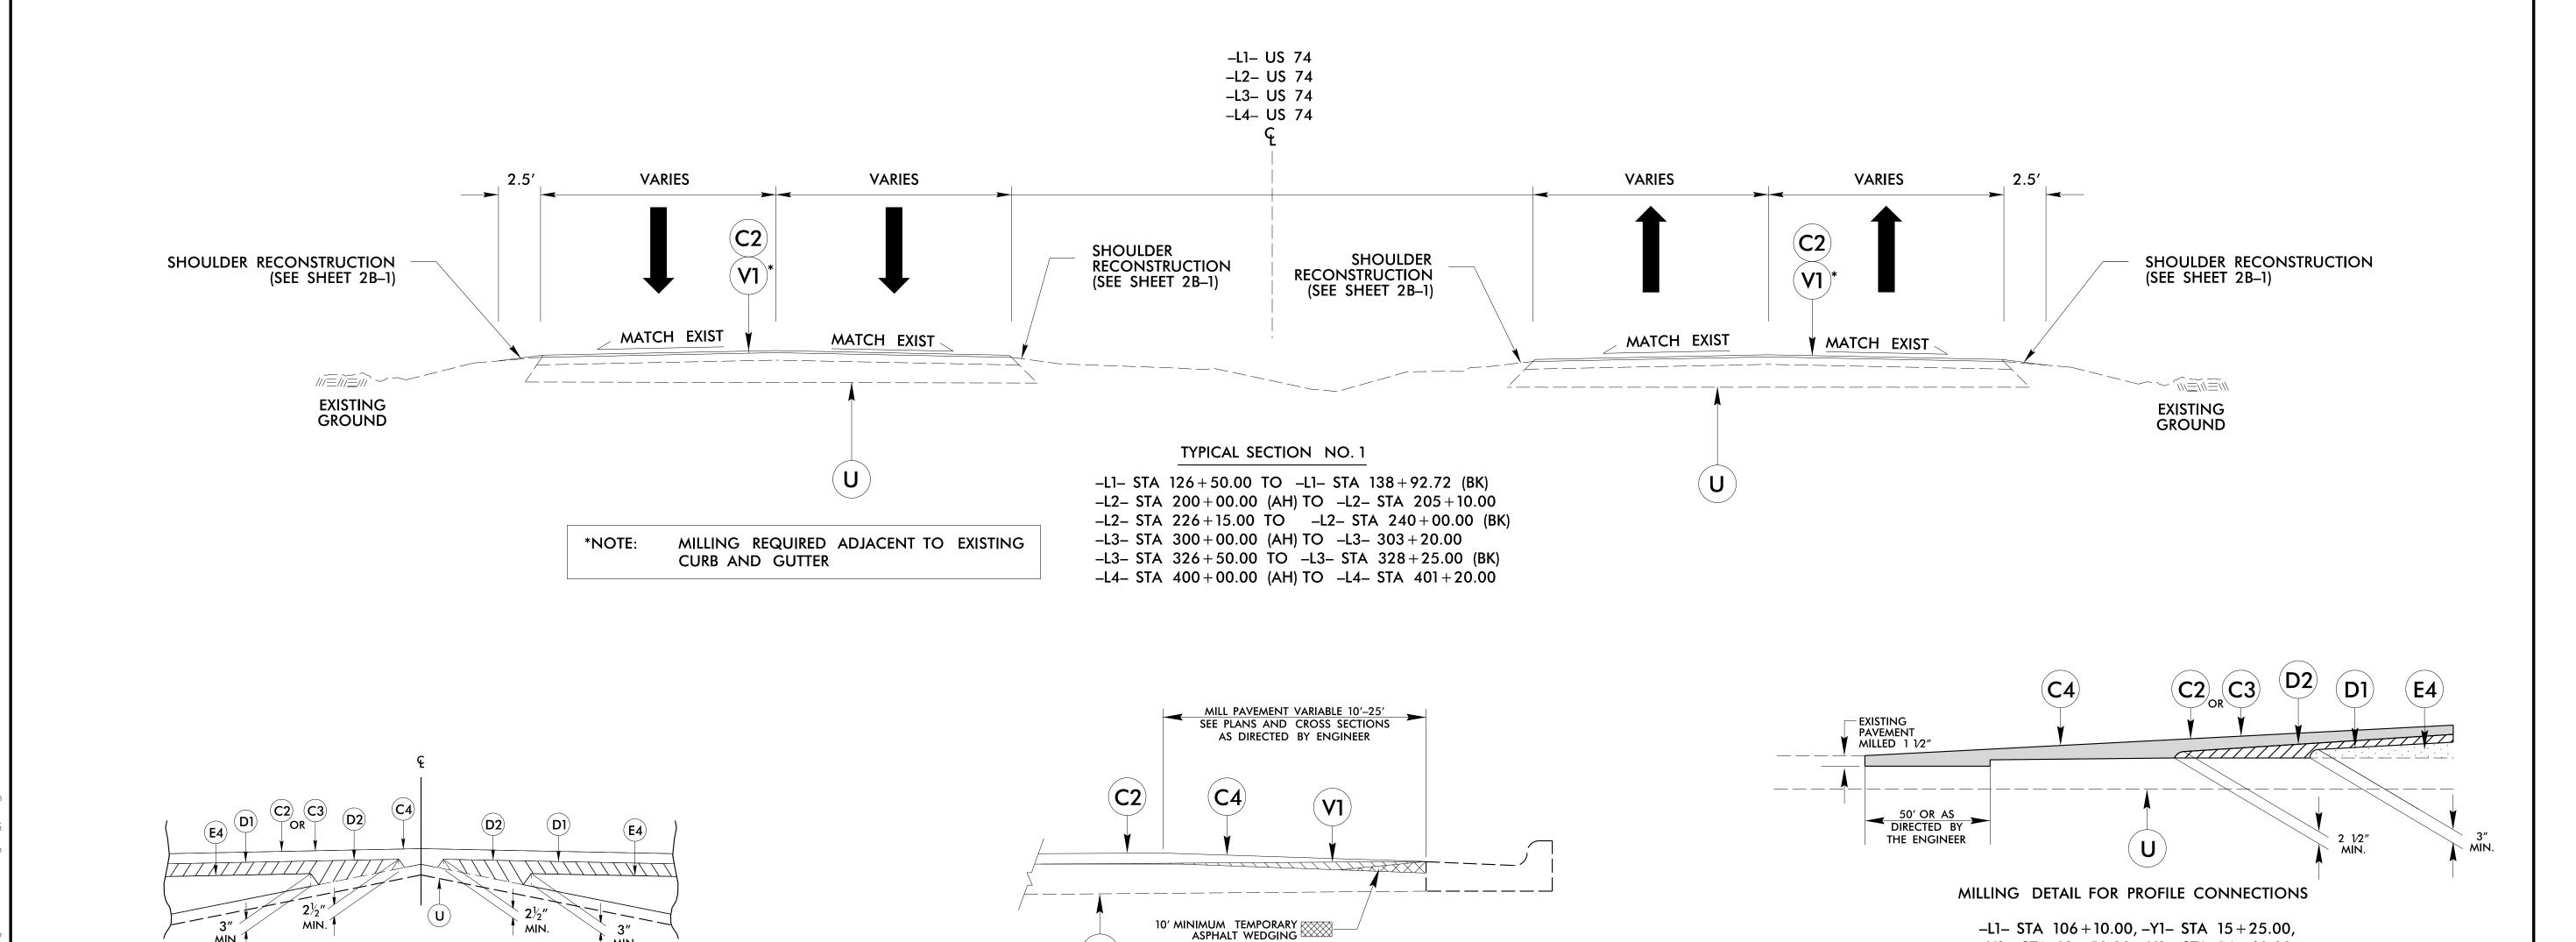

MILLING DETAIL FOR ADJACENT TO EXISTING CURB

U