


TEMPORARY BERM AND SLOPE DRAIN DETAILS

(TO BE USED WHEN SHOULDER BERM GUTTER IS REQUIRED)

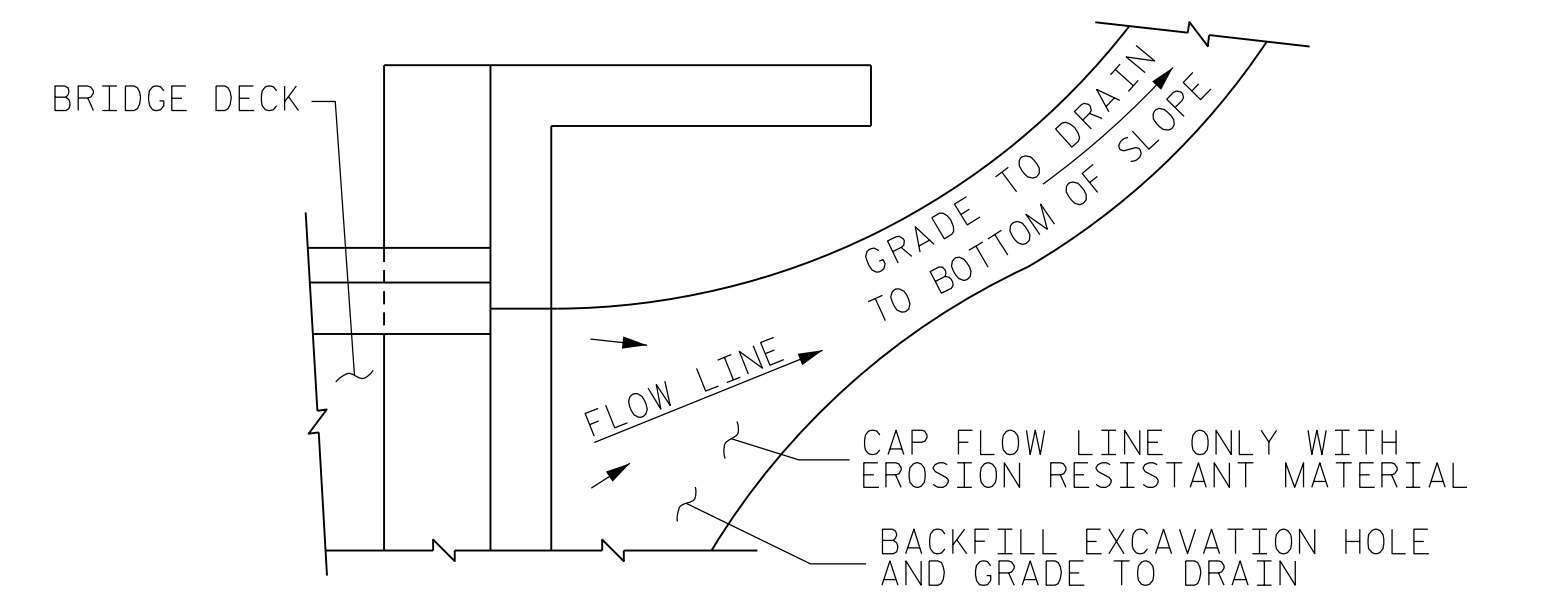

NOTE: IF THE APPROACH SLAB IS NOT CONSTRUCTED IMMEDIATELY AFTER THE BACKFILLING OF THE END BENT EXCAVATION, GRADE TO DRAIN TO THE BOTTOM OF THE SLOPE AND PROVIDE EROSION RESISTANT MATERIAL, SUCH AS FIBERGLASS ROVING OR AS DIRECTED BY THE ENGINEER TO PREVENT SOIL EROSION AND TO PROTECT THE AREA ADJACENT TO THE STRUCTURE. THE CONTRACTOR WILL BE REQUIRED TO REMOVE THESE MATERIALS PRIOR TO CONSTRUCTION OF THE APPROACH SLAB.

TEMPORARY DRAINAGE DETAIL


PROJECT NO. R-2707C
 CLEVELAND COUNTY
 STATION: 24+07.99 -Y9- POT

SHEET 2 OF 2



DocuSigned by:
 Jeff Loftus
 FES1DC02E9794A0... 2/2/2017

Firm License No. C-1051
 421 Fayetteville St,
 Suite 400
 Raleigh, NC 27601
 T 919.380.8750
 www.stewartinc.com

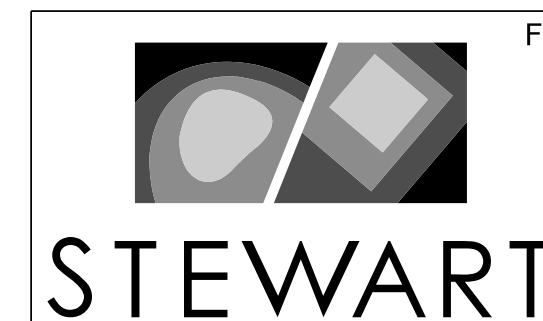

STATE OF NORTH CAROLINA DEPARTMENT OF TRANSPORTATION RALEIGH					
BRIDGE APPROACH SLAB FOR INTEGRAL ABUTMENT DETAILS					
REVISIONS					
NO.	BY:	DATE:	NO.	BY:	DATE:
1			3		
2			4		
SHEET NO. S6-37					TOTAL SHEETS 37

STR. #6

DRAWN BY: J. LOFTUS DATE: 09-16
 CHECKED BY: H. ASSFOURA DATE: 11-16
 DESIGN ENGINEER OF RECORD: J. LOFTUS DATE: 09-16

R 2707C-6
 2/2/2017
 \\406_073_R2707C_SMU-BAS2-56-37.dgn
 USER:deFault