



TYPICAL SECTION NO. 5
 TO BE USED ON MAPS 4,
 MAP 4: STA. 20+85 TO STA. 22+02

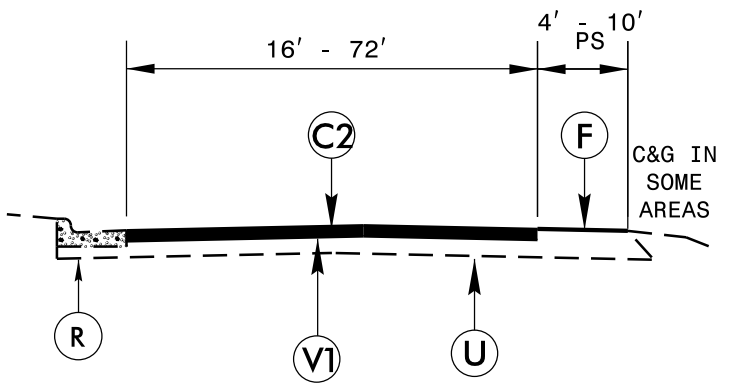


TYPICAL SECTION NO. 8
 TO BE USED ON MAPS 6, 11
 MAP 6: STA. 11+09 TO STA. 18+80
 MAP 11: STA. 11+32 TO STA. 15+89


C&G IN SOME AREAS

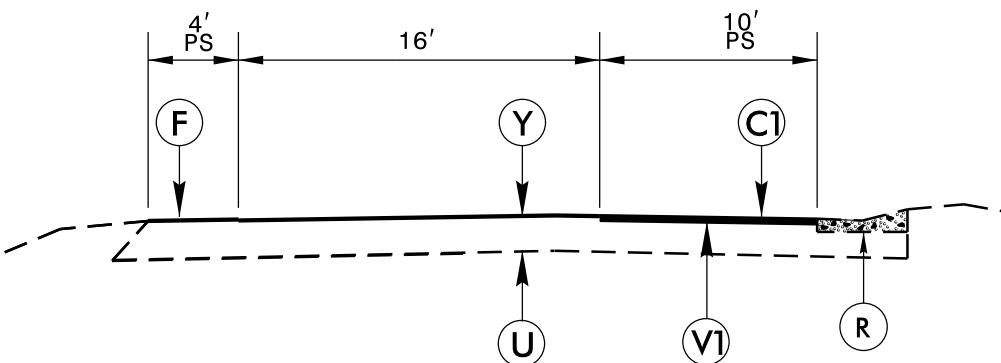


TYPICAL SECTION NO. 6
 TO BE USED ON MAP 5
 MAP 5: STA. 23+96 TO STA. 24+61

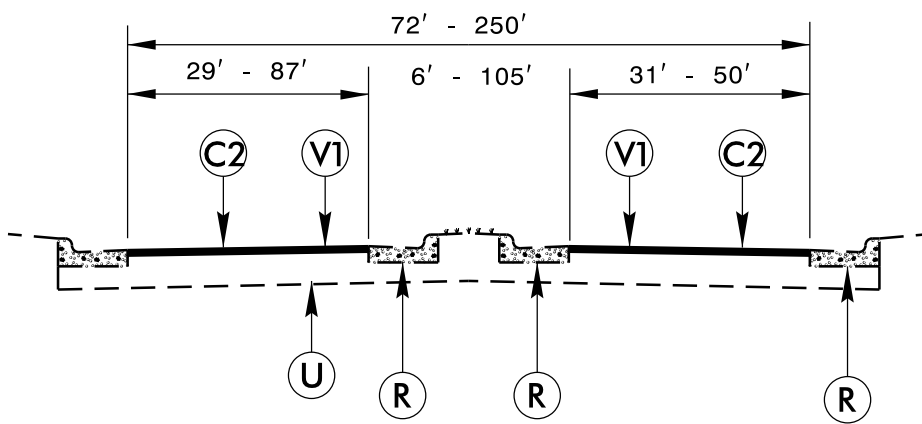

TYPICAL SECTION NO. 9
 TO BE USED ON MAPS 6, 7, 11, 12
 MAP 6: STA. 19+67 TO STA. 20+60
 MAP 7: STA. 10+00 TO STA. 10+95
 MAP 11: STA. 20+22 TO STA. 21+37
 MAP 12: STA. 10+00 TO STA. 11+22

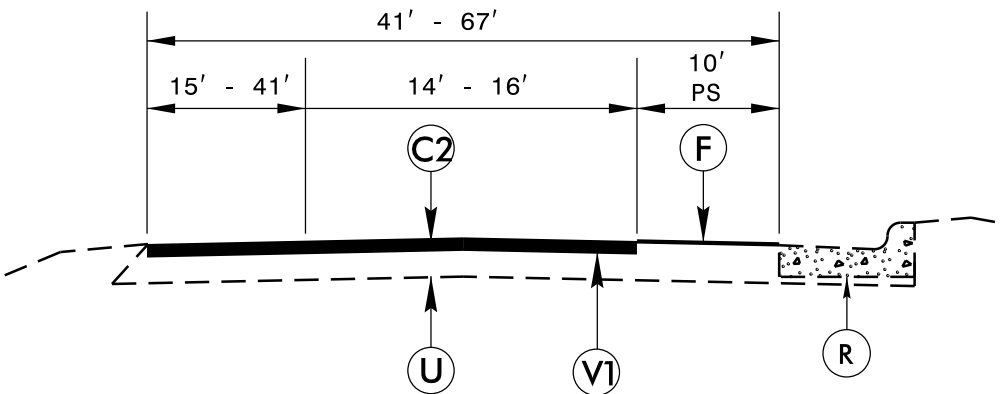

TYPICAL SECTION NO. 7
 TO BE USED ON MAPS 6, 7, 11, 12
 MAP 6: STA. 10+00 TO STA. 11+09
 MAP 7: STA. 19+41 TO STA. 21+35
 MAP 11: STA. 10+00 TO STA. 11+05
 MAP 12: STA. 19+70 TO STA. 22+00

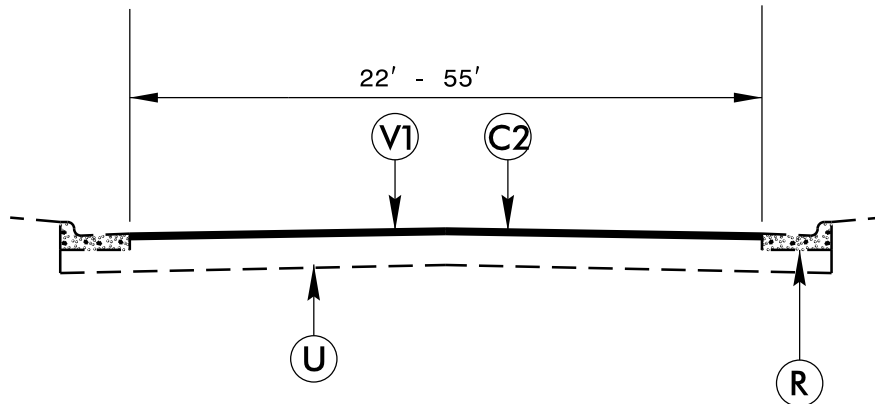

TYPICAL SECTION NO. 10
 TO BE USED ON MAPS 6, 7, 11, 12
 MAP 6: STA. 18+80 TO STA. 19+67
 MAP 7: STA. 10+95 TO STA. 12+30
 MAP 11: STA. 15+89 TO STA. 20+22
 MAP 12: STA. 11+22 TO STA. 14+70

PAVEMENT SCHEDULE	
C1	PROP. APPROX. 1½" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVG RATE OF 168 LBS PER SQ. YD
C2	PROP. APPROX. 1½" ASPHALT CONCRETE SURFACE COURSE, S9.5C AT AN AVG. RATE OF 168 LBS PER SQ. YD.
D	PROP. APPROX. 4" ASPHALT CONCRETE INTERMEDIATE COURSE, I19.0C AT AN AVG RATE OF 456 LBS PER SQ. YD. IN ONE LIFT
F	PROPOSED FOG SEAL TO BE APPLIED TO THE EXISTING ASPHALT SHOULDER
R	EXISTING CONCRETE STRUCTURE
U	EXISTING PAVEMENT
V1	1½" MILLING
V2	MILLED RUMBLE STRIP
V3	4" MILLING FOR PATCHING
Y	PROPOSED DIAMOND GRINDING

06-JUN-2017 07:35
 S:\PDC\3-GulfFord\I-5852B Rehab\CADD\I-5852B typical Sht 3.dgn
 cwiles AT DIV07-300248