



### ADVANCE WARNING AREA

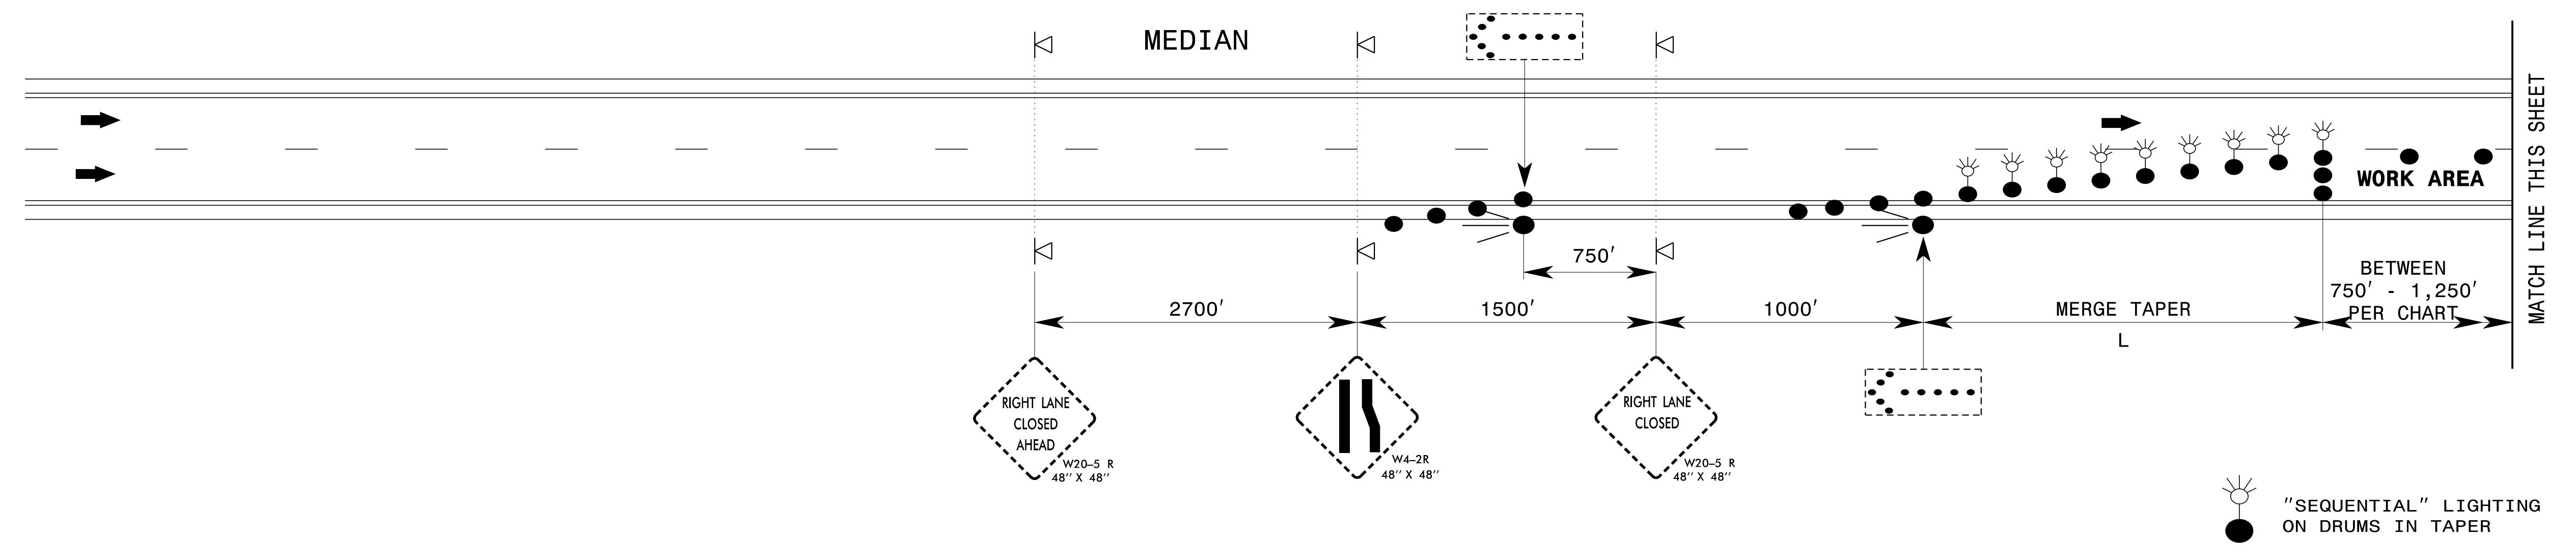

### WORK ZONE AREA

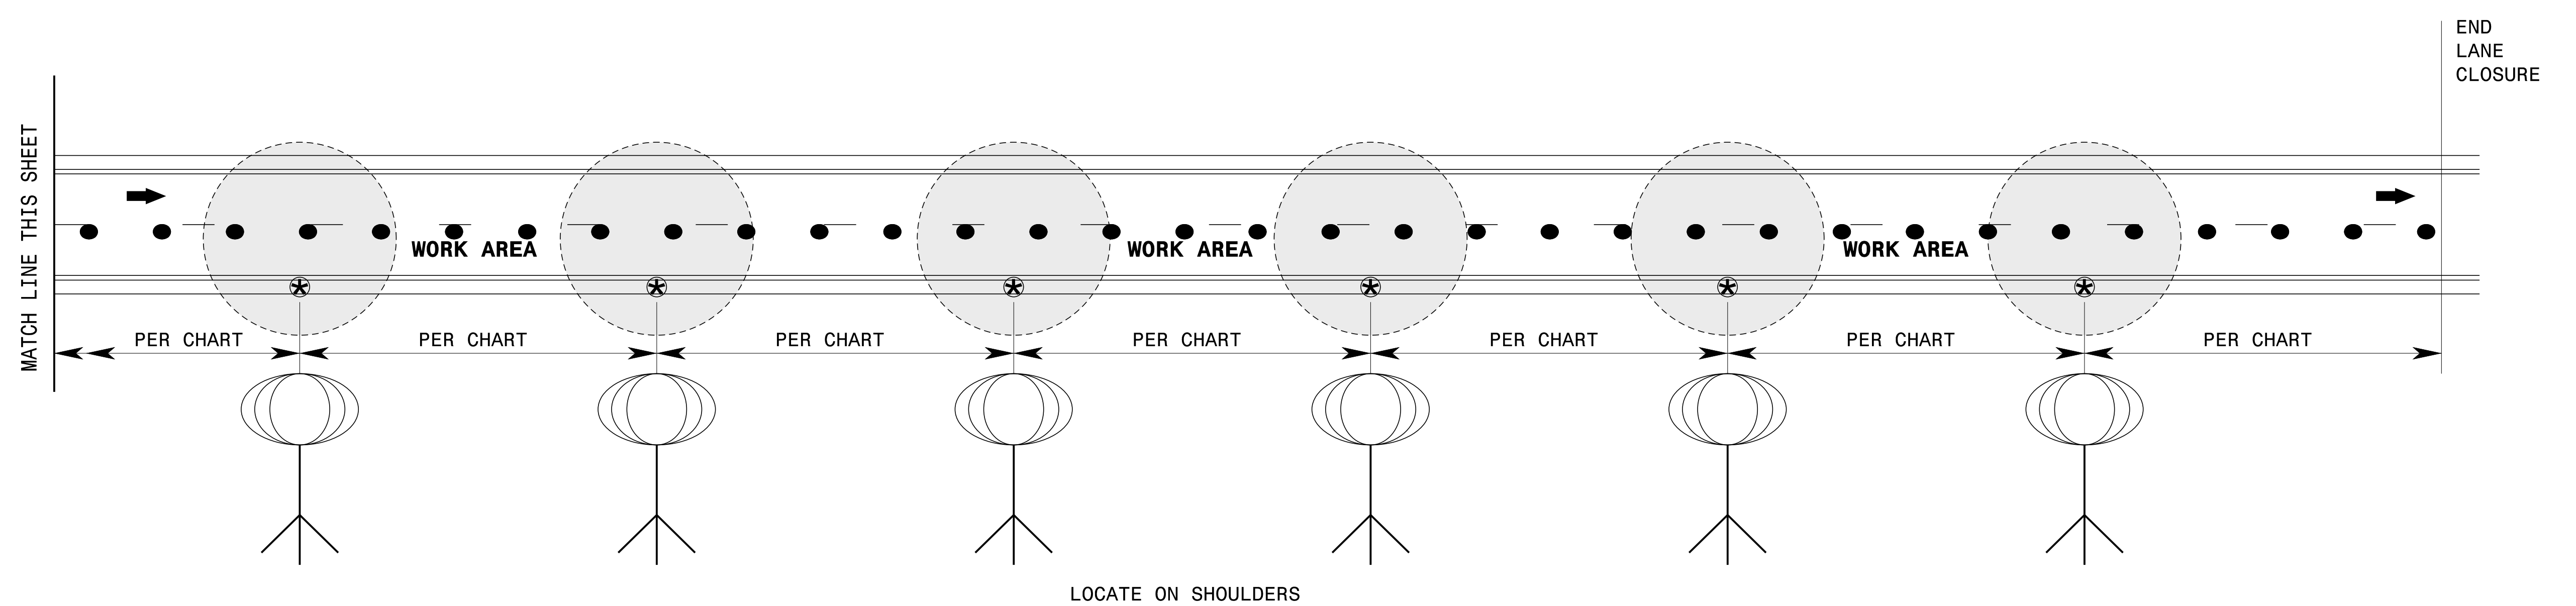

### SPACING CHART

LIGHT OUTPUT (LUMENS)	MINIMUM LIGHTED FIXTURE AREA (SQUARE FEET)	MAXIMUM SPACING (FEET)	LIGHT UNITS (PER MILE)
50,000 TO 65,000	5.5	750'	6
66,000 TO 80,000	5.5	1,000'	5
81,000 TO 100,000	36	1,250'	4

### NOTES


- 1) SPACE LIGHT UNITS ACCORDING TO THE CHART.
- 2) EACH LIGHT UNIT SHALL BE CAPABLE OF ELEVATING TO A MINIMUM HEIGHT OF 14' ABOVE THE PAVEMENT.
- 3) PLACE ON PAVED SHOULDER IF POSSIBLE.

APPROVED: *Matthew V. Springer*  
DATE: 5/24/2017

DocuSigned by:  
Matthew V. Springer  
BC50F6E8B84403

SEAL  
042546  
ENGINEER  
MATTHEW V. SPRINGER

**DOCUMENT NOT CONSIDERED FINAL  
UNLESS ALL SIGNATURES COMPLETED**

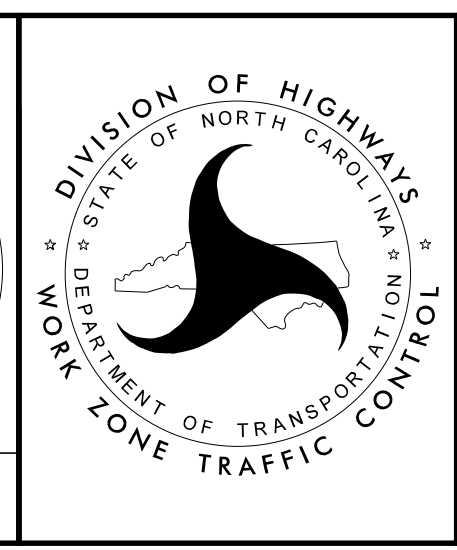

SEQUENTIAL FLASHING  
WARNING LIGHTS  
AND  
WORK ZONE  
PRESENCE LIGHTING

5/24/2017 S:\TMU\WZTC\DesignGroup3\Squad3B\01\Drawings\Sequential.and.Presence Lighting\_20170317.dgn User:kedais