


BENCHMARK: #5 - BRIDGE SPIKE IN BASE OF 12" BEECH 15.08' LEFT OF  
 STA. 15+10.84 -RP-E- EL. 1038.02 N 560676.18 E 1042573.29

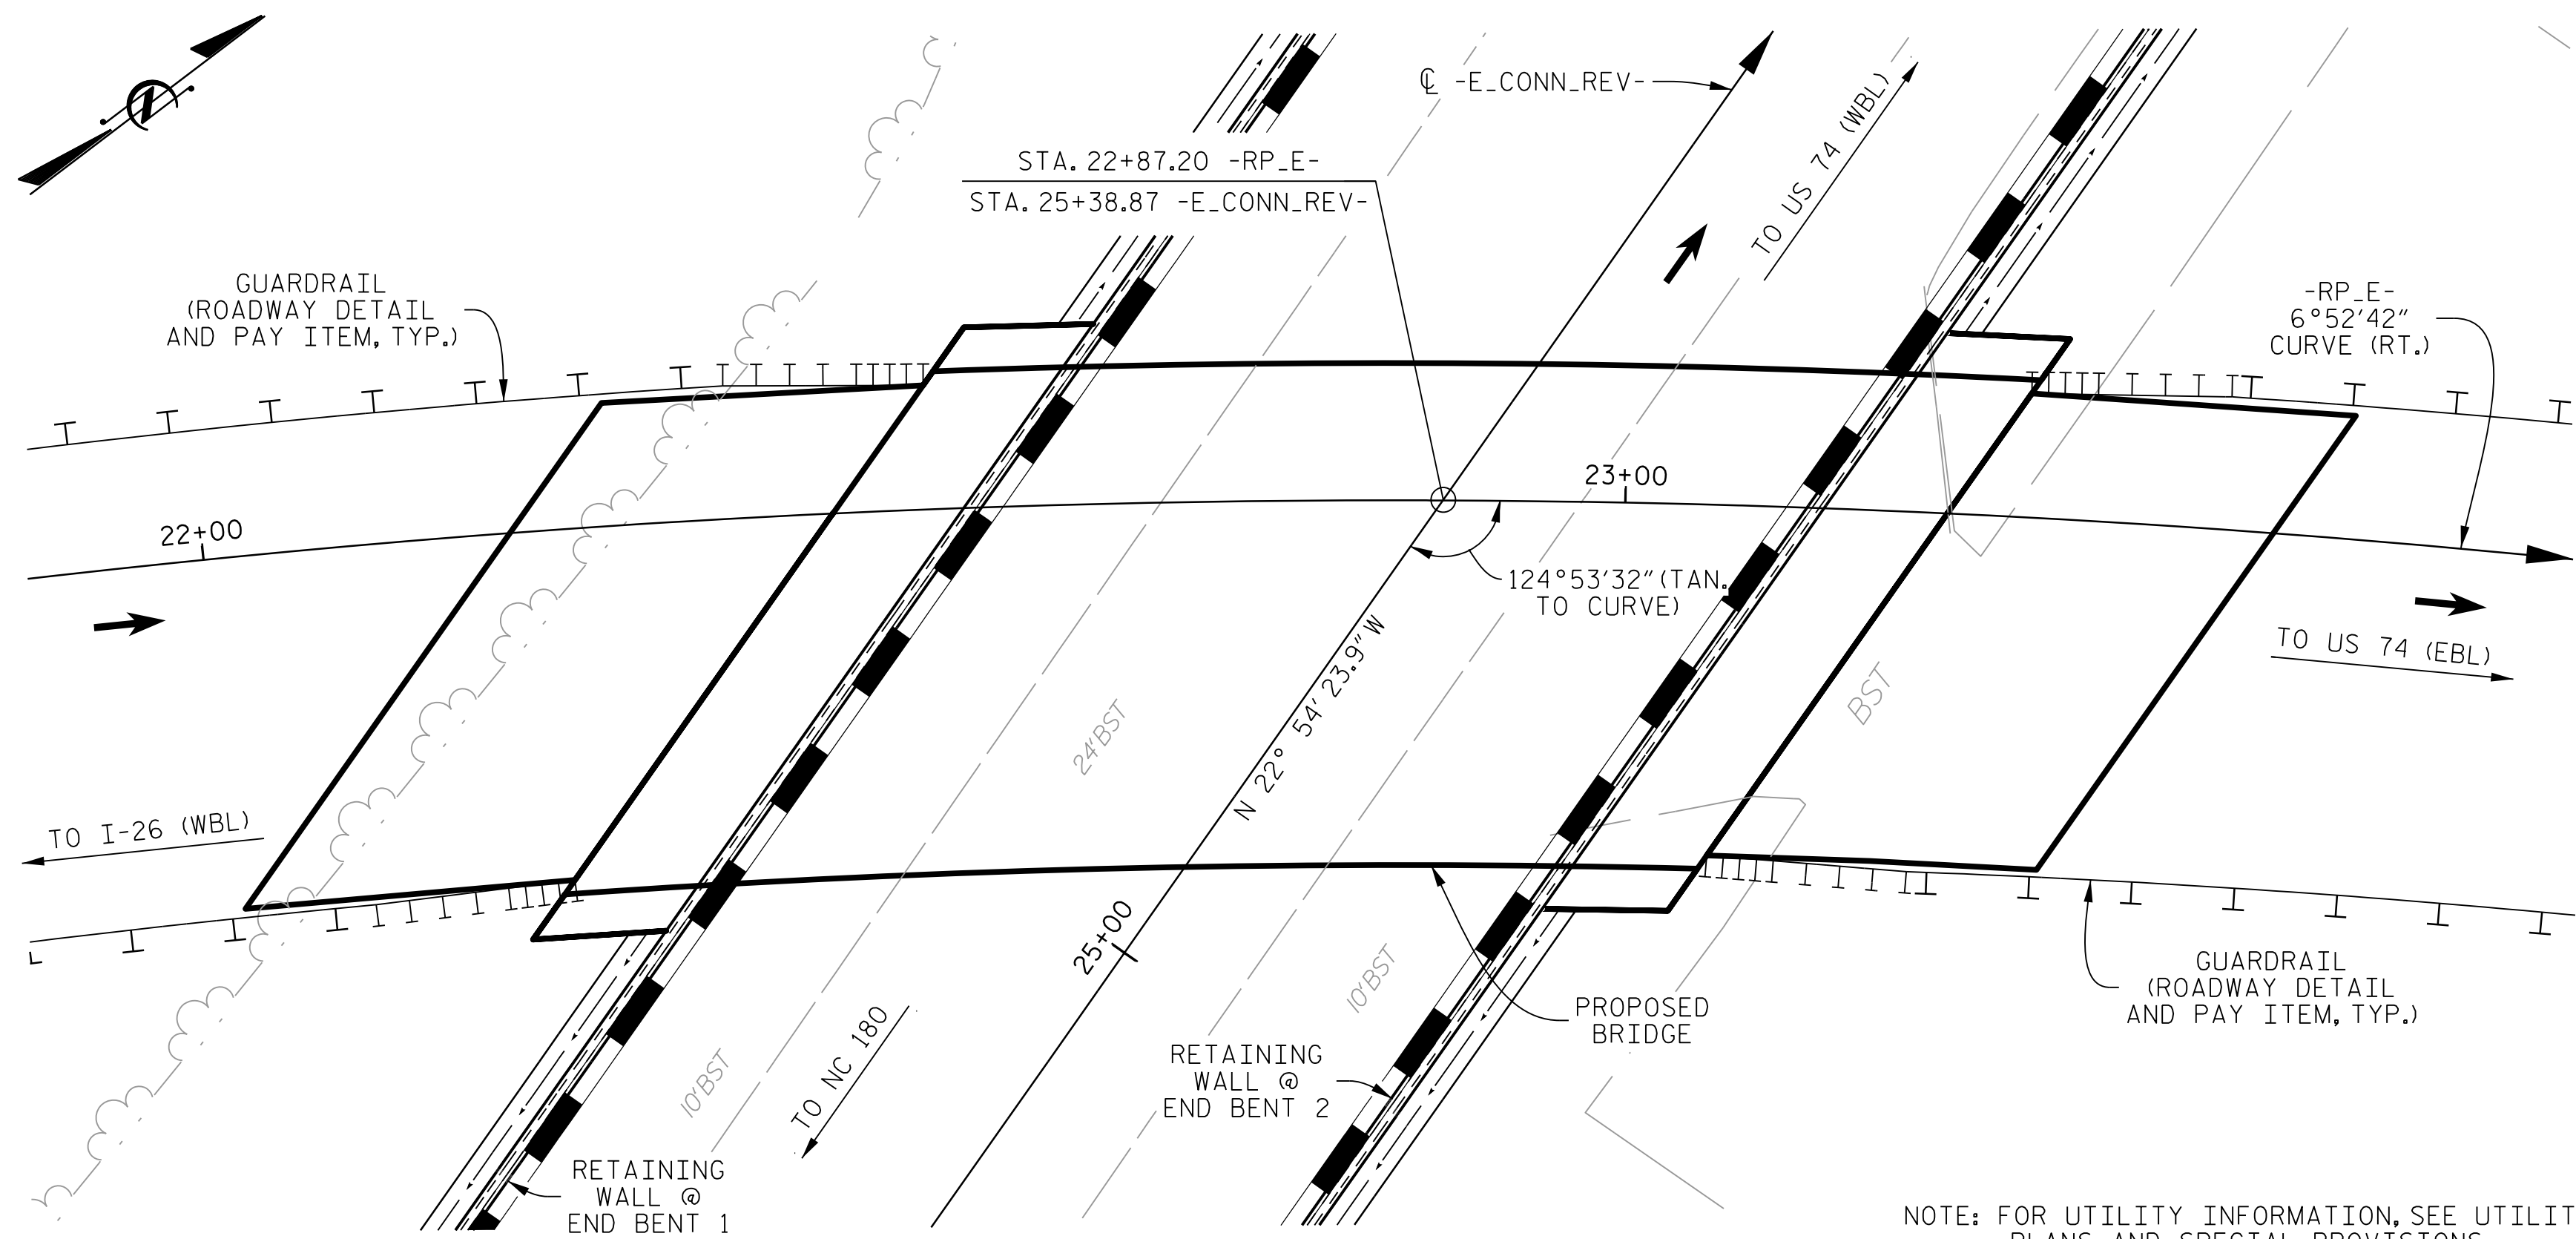

LOCATION SKETCH

NOTE: FOR UTILITY INFORMATION, SEE UTILITY PLANS AND SPECIAL PROVISIONS.

NOTES

ASSUMED LIVE LOAD = HL 93 OR ALTERNATE LOADING.  
 THIS BRIDGE HAS BEEN DESIGNED IN ACCORDANCE WITH THE AASHTO LRFD BRIDGE DESIGN SPECIFICATIONS.  
 THIS BRIDGE IS LOCATED IN SEISMIC ZONE 1.  
 FOR OTHER DESIGN DATA AND GENERAL NOTES, SEE "STANDARD NOTES" SHEET.  
 THE CLASS AA CONCRETE IN THE BRIDGE DECK SHALL CONTAIN FLY ASH OR GROUND GRANULATED BLAST FURNACE SLAG AT THE SUBSTITUTION RATE SPECIFIED IN ARTICLE 1024-1 AND IN ACCORDANCE WITH ARTICLES 1024-5 AND 1024-6 OF THE STANDARD SPECIFICATIONS. NO PAYMENT WILL BE MADE FOR THIS SUBSTITUTION AS IT IS CONSIDERED INCIDENTAL TO THE COST OF THE REINFORCED CONCRETE DECK SLAB.  
 REMOVABLE FORMS MAY BE USED IN LIEU OF METAL STAY-IN-PLACE FORMS IN ACCORDANCE WITH ARTICLE 420-3 OF THE STANDARD SPECIFICATIONS.  
 A WAITING PERIOD IS NOT REQUIRED PRIOR TO THE CONSTRUCTION OF END BENTS.  
 NEEDLE BEAMS WILL NOT BE ALLOWED UNLESS OTHERWISE CALLED FOR ON THE PLANS OR APPROVED BY THE ENGINEER.

FOR SUBMITTAL OF WORKING DRAWINGS, SEE SPECIAL PROVISIONS.  
 FOR GROUT FOR STRUCTURES, SEE SPECIAL PROVISIONS.  
 FOR EROSION CONTROL MEASURES, SEE EROSION CONTROL PLANS.  
 FOR FALSEWORK AND FORMWORK, SEE SPECIAL PROVISIONS.  
 FOR CRANE SAFETY, SEE SPECIAL PROVISIONS.  
 FOR PLACING LOAD ON STRUCTURE MEMBERS, SEE SPECIAL PROVISIONS.  
 FOR MAINTENANCE OF TRAFFIC, SEE TRAFFIC CONTROL PLANS.  
 FOR SURVEY CONTROL SHEET, SEE ROADWAY PLANS.  
 THE ELEVATIONS AND CLEARANCES SHOWN ON THE PLANS AT THE POINT OF MINIMUM VERTICAL CLEARANCE ARE FROM THE BEST INFORMATION AVAILABLE. PRIOR TO BEGINNING BRIDGE CONSTRUCTION, VERIFY THE ELEVATIONS ON THE EXISTING PAVEMENT AND CHECK THE CLEARANCE. REPORT ANY VARIATIONS TO THE ENGINEER. ANY PLAN REVISIONS NECESSARY TO ACHIEVE THE REQUIRED MINIMUM VERTICAL CLEARANCE WILL BE PROVIDED BY THE DEPARTMENT.  
 FOR MAINTENANCE AND PROTECTION OF TRAFFIC BENEATH PROPOSED STRUCTURE AT STA. 22+87.20 -RP-E-, SEE SPECIAL PROVISIONS.

TOTAL BILL OF MATERIAL

	PDA TESTING	REINFORCED CONCRETE DECK SLAB	GROOVING BRIDGE FLOORS	CLASS A CONCRETE	BRIDGE APPROACH SLABS	REINFORCING STEEL	45" PRESTRESSED CONCRETE GIRDERS		HP 14 x 89 STEEL PILES	CONCRETE BARRIER RAIL	4" SLOPE PROTECTION	ELASTOMERIC BEARINGS	FOAM JOINT SEALS	PILE DRIVING EQUIPMENT SETUP FOR HP 14 x 89 STEEL PILES	
	EACH	SQ. FT.	SQ. FT.	CU. YDS.	LUMP SUM	LBS.	No.	LIN. FT.	No.	LIN. FT.	LIN. FT.	SQ. YD.	LUMP SUM	LUMP SUM	EACH
SUPERSTRUCTURE		2,618	3,470		LUMP SUM		4	288.0		148.4		LUMP SUM	LUMP SUM		
END BENT 1				39.9		5,829			8	560		19		8	
END BENT 2				38.6		5,522			8	580		18		8	
TOTAL	1	2,618	3,470	78.5	LUMP SUM	11,351	4	288.0	16	1,140	148.4	37	LUMP SUM	LUMP SUM	16

PROJECT NO. I-4729A  
 POLK COUNTY  
 STATION: 22 + 87.20 -RP-E-


SHEET 4 OF 4

STATE OF NORTH CAROLINA  
 DEPARTMENT OF TRANSPORTATION  
 RALEIGH

GENERAL DRAWING  
 BRIDGE OVER  
 RAMP (-E\_CONN\_REV-) ON  
 RAMP (-RP\_E-) BETWEEN  
 I-26 AND US 74

REVISIONS						SHEET No.
No.	BY:	DATE:	No.	BY:	DATE:	ST-4.1
1	LOFTON	8-25-17	3			TOTAL SHEETS
2			4			24

DOCUMENT NOT CONSIDERED FINAL  
 UNLESS ALL SIGNATURES COMPLETED

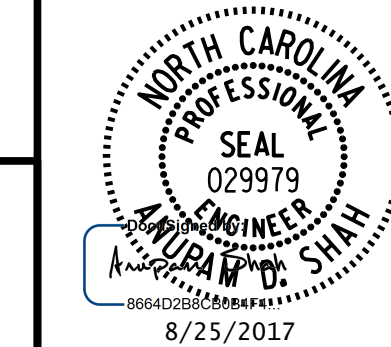

1 REVISED PILE SIZE AND NOTES.

DRAWN BY : K. E. LOFTON DATE : 6-17  
 CHECKED BY : A. D. SHAH DATE : 7-17  
 DESIGN ENGINEER : A. D. SHAH DATE : 8-17

PLANS PREPARED BY :  
**PARSONS**  
 5540 CenterView Drive, Suite 217  
 Raleigh, NC 27606-3386  
 NC LICENSE No. F-0246  
 FOR NORTH CAROLINA DEPARTMENT OF TRANSPORTATION